

XSPC® D5 Photon Tube Reservoir / Pump

Technical Details

Tube Material: Glass
Cap Material: Acetal
Bracket Material: Aluminium
170 Dimensions: 250 x 85 x 85mm
270 Dimensions: 350 x 85 x 85mm
170 Capacity: 410ml
270 Capacity: 690ml
Fill cap size: M20
3x G1/4" Ports
1x 5mm LED Hole

Pump Details


4 Pin Molex and 3 Pin Tacho Output
Speed Selector Dial
Maximum Flow: 1200 lph (12V)
Maximum Head Delivery: 3.7m (12V)
Voltage: 8-24V (37W Max)

Box Contents


1x Tube Reservoir/Pump
1x M20 Cap
1x G1/4" Plug
2x Adhesive Pad
1x 5mm White LED
1x Allen Key Tool
4x M4 Screw



1. Remove the yellow film from the back of each pad.

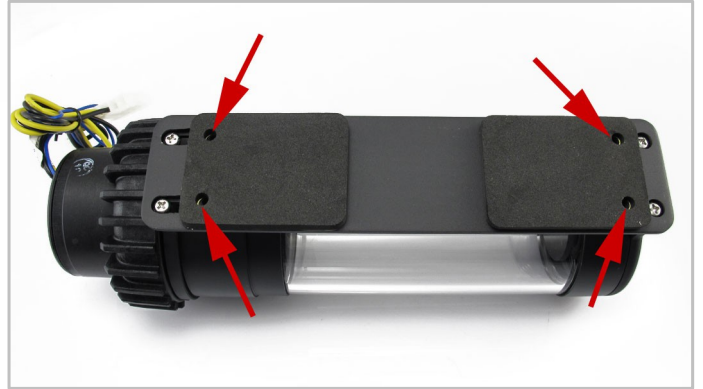

2. Stick the pads to the back of the reservoirs bracket. Make sure the screw holes on the bracket line up with the holes on the pads.

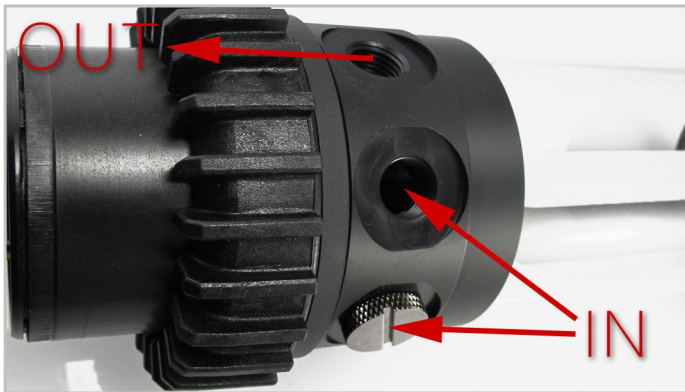

3. The pump had one outlet and two inlets. Attach the hose fittings to your ports of choice.



4. The fill cap can also be used as an inlet with the use of a M20 to G1/4" adapter. The fill cap cannot be used as an outlet.



5. Slightly kink the LED wire and push the LED into the hole on the base of the reservoir. You might need to twist the LED slightly until it slots into place.



6. To mount the reservoir you will need to drill four holes onto a case panel. You can then attach the reservoir by using the four supplied M4 screws.