CLEANspace™

by qüb9® ENVIRONMENTAL

Model **067E**

PORTABLE DECONTAMINATION ENCLOSURE SYSTEM

7-STAGE PERSONAL & WASTE

REMOTE / ATTACHED

Meets/Exceeds [1]NYSDOL & OSHA Regulations

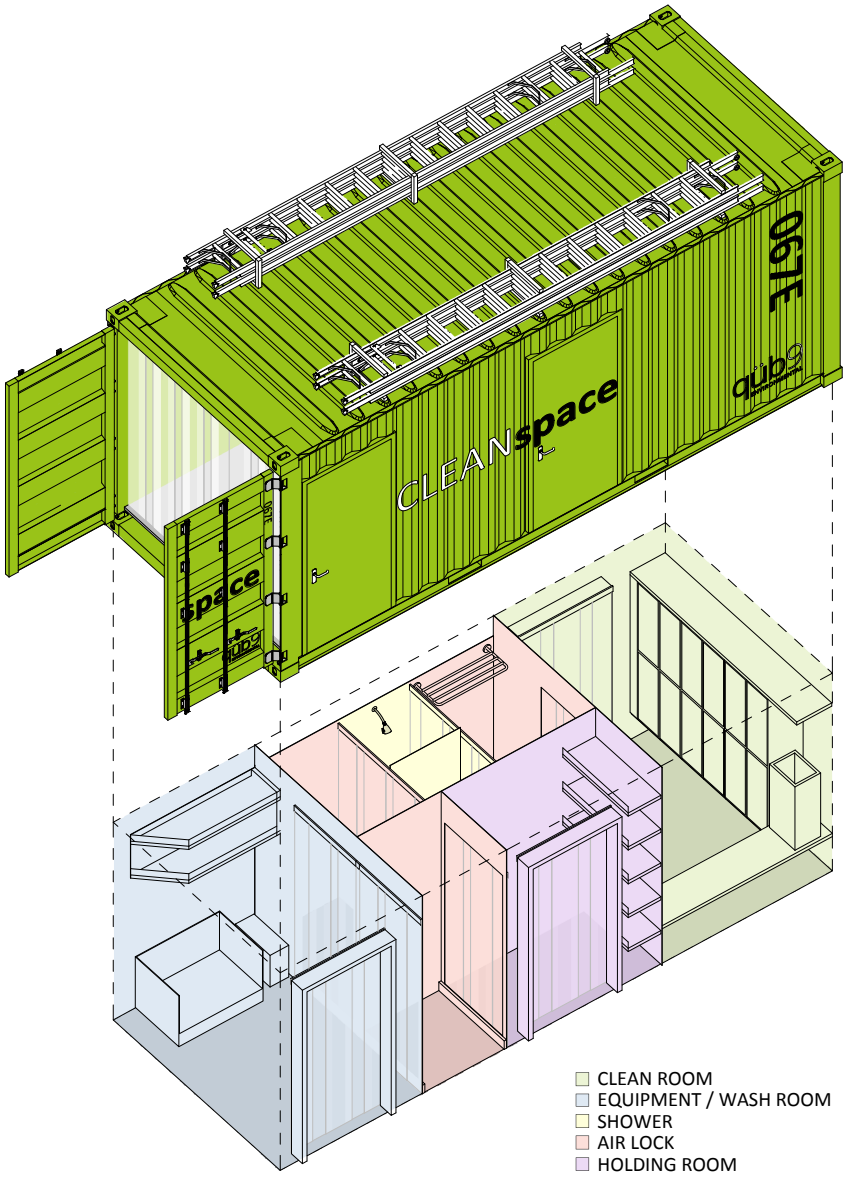

FOR ASBESTOS ABATEMENT PROFESSIONALS

1. **6-worker shifts** in **New York pursuant** to **NYCRR Title: 12** Part 56 SUBPART 56-7.5(b)(c)(d); **All others: OSHA Asbestos Regulation: 29 CFR** Part 1926.1101.

CLEANspace™
by qüb9 ENVIRONMENTAL

Model **067**E

067E **7-Stage Remote / Attached Personal / Waste Decontamination Enclosures** from qüb9® provide professional asbestos abatement contractors with safe, convenient plug-and-play operation and an accelerated return-on-investment. The **067**E is the most flexible, cost-effective, and ergonomic multi-shift, 6-worker space (NYDOL) / waste decontamination platform available.

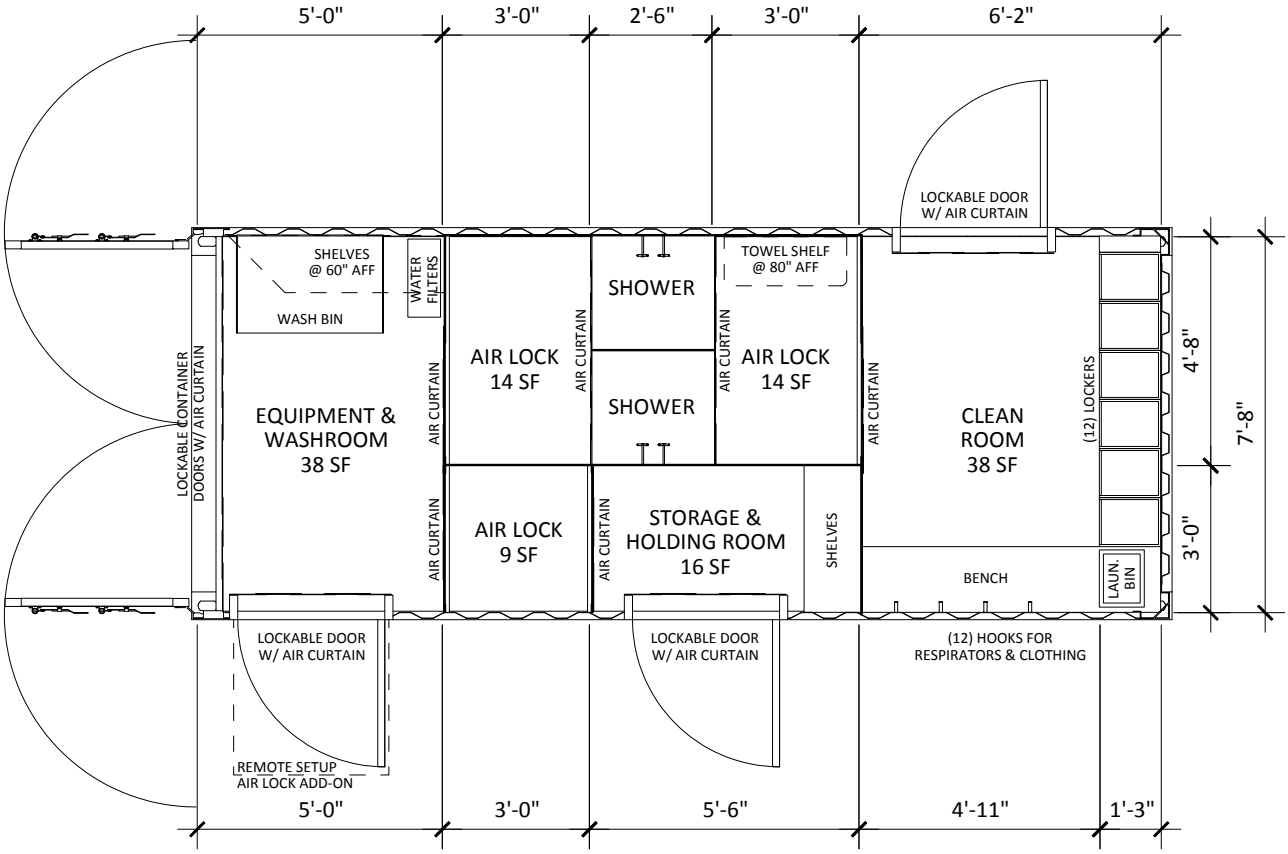

MODEL 067E - FLOOR PLAN
SCALE: 1/4" = 1'-0"

Capacity:	6-persons to street clothes in 25 minutes.
Useful Life:	20+ years; built on a platform proven to withstand the rigors of global inter-modal shipping.
Warranty:	10-Year Limited Warranty with Parts and Labor.
Low Maintenance:	Change filters, restock towels, hose it out when it's dirty. No 6-mil plastic, tape, corrosion or inspection issues(NY).
Deployment:	Anywhere; average contract cost to transport 30-miles by conventional tilt-bed tow truck: $116.06; placement within inches - no labor, registration, plates, over-the-road liability.
Professionalism:	Institutional appearance; Industrial durability.
Plug and Play:	Attach hose and power cord.
Construction:	Welded steel structure with non-permeable coatings.

Continued:

Reductions: Deployment costs; maintenance labor; consumables, consumable waste, service-labor; waste decontamination construction time and materials; decommission time and labor; depreciation.

Eliminates: In-house deployment labor; titles; taxes; plates; OTR/tow package insurance; wiring issues; 6 mil plastic / tape; unit decay; inspection issues related to unit quality control and shift size; privacy concerns.

Additional Features:

Materials:
Structure made of A588 high-corrosion-resistance structural steel designed for marine / shipping environments; industrial enamel finish; Interior coated with impermeable direct to metal epoxy; 1.125" marine-rated subfloor sealed with epoxy and rubberized non-skid.

Equipment / Wash Room:
Walk-off pan, 12-boot shelves, 12-hooks, suit disposal, easily accessible mechanicals, 2-gang GFCI protected receptacles, hose bib, cold-weather purge system, wall-mount First Aid station, enclosed bag, filter and tool storage containers with inventory control tabs. Wash tub for Waste Disposal System.

AirLock 1:
14 SF; 36" curtain-to-curtain, 100% overlap 30mil AirCurtains: Typical

Shower Space (2 showers):
On demand hot water, 306 stainless or, optional aluminum, shower walls, floor grids and 40-gallon gray-water reservoir, water-saving push-button valve and hot/cold adjustable mixing-valve with preset at the tap. Fire-retardant air-curtains simultaneously isolate contaminants, water and humidity. Wall-mounted shower-gel dispenser, respirator hook and water-locked filter disposal is standard in each shower.

AirLock 2:
12-towel shelf, respirator hooks.

Clean Room:
38 SF with curtained Privacy Room; 12-wall-mounted lockers (12"W x 32"H x 15"D) installed above finished floor for easy cleaning. Wall-mounted folding polyethylene dressing bench, polyethylene floor bench, AirCurtains for privacy and air-control. Clean storage for Personal Protection Equipment(PPE), 12-wall-mounted jacket / respirator hooks, Laundry depository, Ceiling-mounted electrical panel and in-line water heater near exterior door. Device charging port in each locker.

Waste AirLock:
9 SF; 36" curtain-to-curtain, 100% overlap 30mil AirCurtains: Typical.

Holding / Storage Room:
16 SF / 128 CF with sealed floor system, dual air curtain and locking exterior door.

Regulatory Compliance Citations:

USDOL: OSHA: Asbestos Regulations: 29 CFR Part 1926.1101(j)(1).
NYSDOL: 12 NYCRR Part 56 SUBPART 56-7.5(b)
NYCDEP: BEC: Title 15, Chapter 1. Subchapter A., F. Part 2. §1-82, §1-83.P

Specifications:

Structure:	A588 high-corrosion resistant steel superstructure and partition walls.
Exterior:	8'-0" W x 8'-6" H x 20'-0" L
Interior:	7'-10" W x 7'-10" H x 19'-10" L
Exterior Coatings:	DTM primer; UV stable industrial enamel; Custom colors available.
Interior Coatings:	Impermeable epoxy coating, anti-microbial protectant.
Subfloor:	1.125" marine-rated plywood with epoxy coating, rubberized non-skid.
Transport Payload:	4,000 lbs. tools & equipment; 112 SF / 784 CF.
Working Storage:	2,250 lbs. tools & equipment; 52 SF / 350 CF.
Tare Weight:	4,420 lbs.
AirCurtains:	PVC 100% overlap transparent 30mil retardant NFPA B-s3-d0 fire class
External Power:	2/3 oil-resistant pigtail with locking, weather-proof connection;
On-board Power:	Ceiling mounted EMT with GFCI protected devices.
Power2:	**Optional:** 2Kw generator with isolated enclosure / fuel storage;
Lighting:	LED fixtures rated for wet conditions, warranted for life of unit;
Water Supply:	50' x 5/8" NPT, NSF approved supply hose;
Water Heater:	Inline high-efficiency on-demand electric water heater
Water Filtration:	Guardian™ Puro**Loc**™ 2205 2-stage 20/5 Micron gray-water filtration;
Reservoir:	40-gallon surplus reservoir;
Holding tank:	**Optional;**
Discharge:	50' x 5/8" standard reinforced oil resistant hose;
Leveling:	Built-in spirit levels for leveling assistance;
Graphics/Branding:	Options available in vinyl or custom paint by quotation;
Ladder Racks:	**Optional**
HVAC:	**Optional**

10-Year Warranty with Transferable Option:

For a period not to exceed **Ten-Years**(10-Years) from the date of manufacture, qüb9 will **repair or replace for the Original Buyer or Transfer Buyer, at our expense,** any **manufacturer's defect in workmanship**. Upon the occasion of: (1) immediate written notice to us by (a) the Original Purchaser or, (b) the Transfer Purchasor and, after: (2) our inspection of the subject defect and determination of liability by us, we will at our option repair or replace the defective component(s). **This includes labor and materials** at our facilities or, at qüb9 authorized facilities in your area. **qüb9 shall not be responsible for shipping, handling or delivery** in either direction of unit to any location for any purpose under this Warranty.

Printed Materials, Copyright Notice & Disclaimer:
©2015, qüb9, inc. All Rights Reserved. No reproduction of any portion of this material is permitted without express written permission of qüb9, Inc. Illustrations and specifications contained in this material are based on the latest information available at time of printing. qüb9, Inc. reserves the right to make changes to product designs, specifications, materials, colors, at any time, without notice.

®qüb9, inc.
620 Park Avenue
Box 377
ROCHESTER, NEW YORK 14604

CONTACT: info@qub9.com
(585) 484-1808