




The Real-Time Automatic  
**Deflickering** And **Denoising** Solution  
For Sport Broadcasting

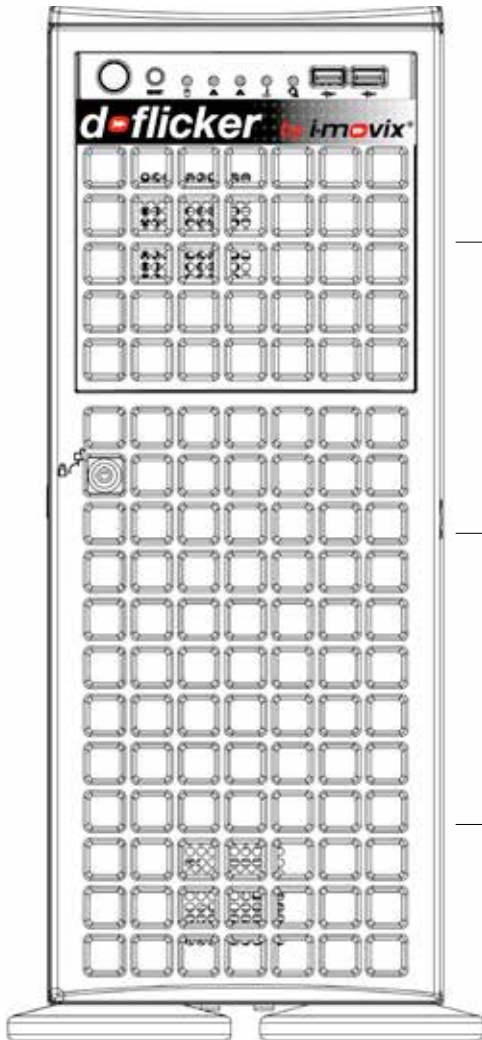

*Automatic Deflickering*

*Automatic Denoising*

*Only with I-MOVIX solutions*



## D-FLICKER

4U unit

Rackmountable

Real-time HD-SDI directly from the CCU

Remote updates

Available for all I-MOVIX solutions

Optional integration in LSM workflow (RJ45)

# D-FLICKER - 1U / 4U

## ▼ GENERAL

Form factor	4U Tower (optional rackmount kit available)
Dimensions (H x W x D)	462 x 178 x 676 mm (1,512x 0,58 x 2,21 in)
Gross weight	28,1Kg (61,95 lb.)

## ▼ OPERATING ENVIRONMENT / COMPLIANCE

Power requirements	AC 100V to 240V, 50 to 60Hz
Power supply	1620 W Redundant power supply with PMBus
RoHS Compliance	Yes
Operating Temperature	10° to 35°C
Non-operating Temperature	-40° to 70°C
Operating Relative Humidity	8% to 90% (non-condensing)
Non-operating Relative Humidity	5% to 95% (non-condensing)

## ▼ SYSTEM COOLING

Fans	4x 92x38 mm 4-pin PWM Midl. Cooling Fans 2x 80x38 mm 4-pin PWM Rear Exhaust Fans
------	---

## ▼ CONNECTIVITY

### HD-SDI MODE

Connection to CCU	HD-SDI x3 (input-output-genlock)
Connection Protocol	—
Genlock	Blackburst or Tri-Level

### FILE-BASED MODE (OPTIONAL)

Connection to XT server	RJ45 (Gigabit Ethernet) x2
Connection Protocol	LinX (free licence available from EVS, check with sales rep.), Foxx
Codecs	DNxHD (only for file-based mode)

## ▼ VIDEO

Available formats	1080i & 720p
-------------------	--------------

