

Northern Solid Sawn™ Flooring by Vintage



PREFINISHED
HARDWOOD FLOORING



NORTHERN SOLID SAWN

Vintage's Canadian made Northern Solid Sawn is the next generation of high performing structured hardwood floors. Backed by the best stability warranty in the business and trend hitting colors, textures and widths will provide you with a lifetime of satisfaction.



HICKORY	MAPLE	ETCHED MAPLE	RED OAK	WIRE BRUSHED RED OAK	WHITE OAK
NATURAL	NATURAL	ICELAND	NATURAL	KAHLUA	NATURAL
CHIVAS	OXFORD	MALDIVES	KAHLUA	BERKSHIRE	ORACLE
NILE	PEGASUS	BORNEO	MOCHA	CHARIOT	GABON
OLD MISSION	WINDSOR	SAMOA	BERKSHIRE	COCOA	BUCKINGHAM
WINCHESTER	NEBULA	GALAPAGOS	CHARIOT	GRYPHON	BAROQUE
MOOREA	MOROCCO	TAHITI	COCOA	PEWTER	GOTHAM
MESQUITE	REMBRANDT		GRYPHON	WIRE BRUSHED WHITE OAK	BLACK WALNUT
	GODIVA		PEWTER	ORION	NATURAL
	TABOO			GOTHAM	MEDIEVAL
					ETCHED NATURAL

NORTHERN SOLID SAWN™ SPECIFICATIONS



NORTHERN SOLID SAWN


Product Type:	Structured Northern Solid Sawn
Product Species:	Black walnut, Hickory, Maple, Red Oak, White Oak
Product Width:	3 1/4" (84 mm), 4 3/8" (112 mm), 5" (127 mm)
Product Lengths:	Estate & Select-V: 15" - 70" Average 36" (381mm - 1750mm Average 914mm) Character: 20" - 84" Average 42" (511mm - 2107mm Average 1066mm)
Product Gloss:	Hickory, White Oak Select-V: Semi gloss Red Oak Estate: Semi gloss Black Walnut, Maple Estate & Select-V: Pearl Hickory, Maple, White Oak Character: Pearl Wire Brushed Red Oak, White Oak Character: UV Urethane Oil Etched Maple Estate & Select-V: UV Urethane Oil Etched Walnut SV-Oil
Product Grade:	Select-V: Color variation and naturally occurring characteristics, 1/4" sound filled knots, some voids are allowed. Splits, checks and knots on bevel are not part of this grade. Character: Unlimited color variation and naturally occurring characteristics, sound filled knots (no limitation in knot size) checks and splits. Some voids are allowed.
Product Construction:	3 ply Northern Solid Sawn
FSC:	Available by Special Order. CARB Compliant, VOC free glues, stains and finishes.
Product Thickness:	3/4" (19 mm)
Face Lamella:	5.1 mm Sawn hardwood face
Core Layer:	12.3 mm SPF Qtr. Sawn
Back Layer:	1.6 mm Hardwood veneer
Installation Method:	Nail, glue or float
Radiant Heat:	See Radiant Heat Warranty
Structural Warranty	Lifetime
Lifetime Stability Warranty	Relative humidity must be maintained between 25-70%
Residential Warranty:	25-Year for Pearl & Semi gloss, 10-Year for UV Urethane Oil
Commercial Warranty:	3-Year for Pearl & Semi gloss, 1-Year for UV Urethane Oil

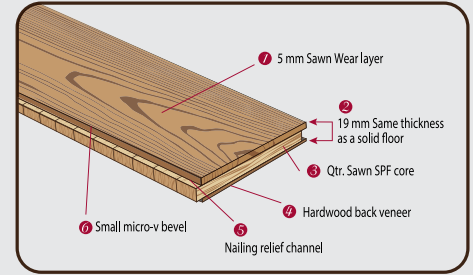

*Not all species are warranted over radiant heat. Consult your dealer for further information.



Relative Humidity Stability Chart

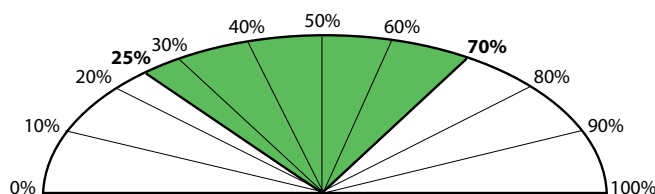

3/4" (19mm) Northern Solid Sawn 25-70%



VINTAGE HARDWOOD FLOORING

409 Evans Ave. Toronto,
Ontario M8Z 1K8

Tel: (416) 252-0962
Toll Free: 1-877-256-0231

www.vintageflooring.com