

GEEKVAPE H45
User Manual


封面

封一

Thank you for choosing GEEKVAPE

- * For better user experience, please read the user manual before starting your vape journey.
- * Please keep the user manual for future reference.

OVERVIEW

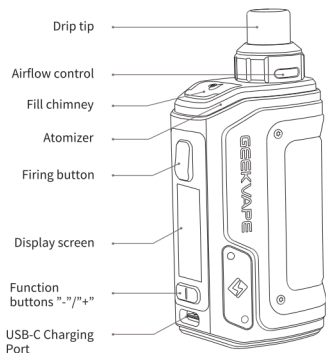

PRODUCT PARAMETERS

- Size: 43.1*28.6*91.05mm
- Battery capacity: 1400mAh
- Charging voltage: 5V 2A
- Mode: Power / Bypass
- Output Power: 5-45W
- Screen dimension: 0.96 TFT screen display
- Resistance range: 0.1-2Ω
- Working Temperature: 0 C ~ 45 C
- Standby current: <20uA
- Filling mode: Top filling
- Drip tip type: 510 drip tip

SETUP GUIDE



- 1. Install coil:** Take out the coil, and insert the coil from the bottom of the pod.
- 2. Fill e-liquid:** Pull out the silica gel plug according to the instructions, then refill e-liquid from oil-filling slots. It is recommended to keep two thirds full.
- 3. Install the atomizer:** Insert the atomizer with e-liquid into the mod.
- 4. Start to use the device:** After keeping it stand for about five minutes, you are free to use the device. You can rotate the pod 180° to adjust the airflow in order to enjoy optimal vaping experience.

INSTRUCTIONS

- 1. Turn on/Turn off:** Press the Fire button 5 times in quick succession within 2s to turn on the device. Screen will begin to display the company logo.
- 2. Vaping:** Press and hold the fire button to start to vape.
- 3. Mode Setting:** In the main interface, click the fire button 3 times in quick succession with 2s to enter mode setting state; press the "+/-" button to cycle select between Power/Bypass mode; press and hold the fire button for 1s to confirm and exit the mode setting or no operation in 2s, the device will automatically save and exit the mode setting.
- 4. Power Wattage Adjustment:** Press the "+/-" button to adjust up/down the power wattage, each increment is 0.5W; press and hold the "+/-" button for 1s to do quick adjustment, each increment is 1W. When maximum / minimum wattage value is reached, the adjustment will stop automatically.
- 5. Bypass Mode:** In the Bypass mode, the output voltage is approximately equal to the battery voltage (maximum output power and maximum output current is limited).

- 6. Puff Clear:** Click the fire button 3 times in quick succession to enter the mode setting state, and then press the fire button to select puff counter option, press "-" button to clear puff value.
- 7. Button lock/unlock:** Press the "+" and "-" button at the same time to lock/unlock the "+" and "-" buttons (the fire button still works); and then click the fire button 3 times in quick succession to lock/unlock the fire button.
- 8. Stealth Mode:** In the standby state, press and hold the fire button, "+" and "-" button all at the same time for 2s to enter stealth mode, repeat the operation to exit the stealth mode.
- 9. Theme Color Switching:** Click the fire button 3 times in quick succession to enter the mode setting state, press and hold the "+/-" button at the same time to switch the theme color.
- 10. Screen Brightness Adjustment:** Press and hold the fire button and "+" button at the same time to increase the screen brightness; press and hold the fire button and "-" button at the same time to decrease the screen brightness.
- 11. Restore Factory Settings:** When the device is turned off, press and hold "+" and "-" button at the same time, the screen will display firmware version number, and then press and hold fire button, "+" and "-" button all at the same time to restore factory settings, a prompt as "CONFIG RESET" will be displayed on screen to indicate successful operation.
- 12. Prompts:**
 - 10s Timeout Prompt: When device is on, press and hold the fire button over 10s, the device will stop outputting automatically for safety, also a prompt as "10s CUT OFF" will be displayed on screen.
 - Low Battery Prompt: When the battery voltage is lower than 3.2V or the voltage is lower than 2.9V while vaping, the system will stop outputting and a prompt as "BATTERY LOW" will be displayed on screen.
 - No Atomizer Prompt: If there is no atomizer detected by the system, a prompt as "NO ATOMIZER" will be displayed on screen.
 - Short Circuit Prompt: When circuit short happens, a prompt as "ATOMIZER SHORT" will be displayed on screen.
 - Overheat Prompt: When the device's temperature is over 65°C in standby state or is over 85°C while vaping, the device will stop outputting automatically for safety, also a prompt as "OVERHEAT" will be displayed on screen.



ATTENTION

- * The product is not intended for pregnant women and those who are under the age of 21.
- * Keep away from fire or extreme heat.
- * Avoid impact.

CUSTOMER SERVICE

Service in China
Main Page: www.geekvape.com
Address: 7th Floor, No.3 West Block, LaoBing Building, XingYe Road #3012, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China, P.R.C. 518502.
Phone: (001) 866-985-6876
Email: Support@geekvape.com
Available Time: 24/7

ANTI-COUNTERFEITING CHECK


- Go to www.geekvape.com and find PRODUCT VERIFICATION at the bottom of the main page.



- Scratch the code bar under the label on the box and enter the 12-digit security number in the blank on the webpage.



- Click 'Go' and a pop-up window shall appear confirming if your product is authentically made.



英语

1

2

3

4