

INTERNATIONAL TRX TRTL-30x6



High Security Burglary and Fire Resistive Safe

Body

The safe has a total body thickness of 4 1/8". High strength alloys and our proprietary barrier material combine to provide multi-layer protection designed to withstand the most sophisticated attack by tools, torch or explosives.

Door

The door has a thickness of 8 1/4". The same high strength alloys and proprietary barrier material used to protect the body are repeated in the door.

Locks

U.L. listed manipulation resistant high strength Group 1 combination lock with spy proof dial are used on all TRTL30X6 safes. A separate high security auxiliary key lock is standard on all models.

Boltwork

Massive 1 1/2" diameter chromed high tensile steel bolts are driven both horizontally and vertically through reinforced bolt chambers by the safe's three-way boltwork mechanism. The hinge side of the door is protected by a row of dead bolts that fit into similar reinforced bolt chambers.

Glass Relockers

A large tempered glass plate is used to protect vital areas of the locking mechanism. If attacked, the glass will shatter and cause the relockers to activate thereby preventing the safe from being opened.

Adjustable Shelves

All models are supplied with adjustable shelves.




International TRX TRTL-30x6

Protection and Craftsmanship Combined!

The International TRX TRTL30x6 is one of the newest safe in this class to pass the U.L. test. The safe utilizes the newest, most revolutionary technology to form the strongest safe to pass this most severe test. Massive copper plates incorporated into our patented composite material achieving over 40,000 pounds of compression strength, makes this one of the most formidable defensive barriers ever offered.

Independently tested by U.L. for your peace of mind.

Specifications

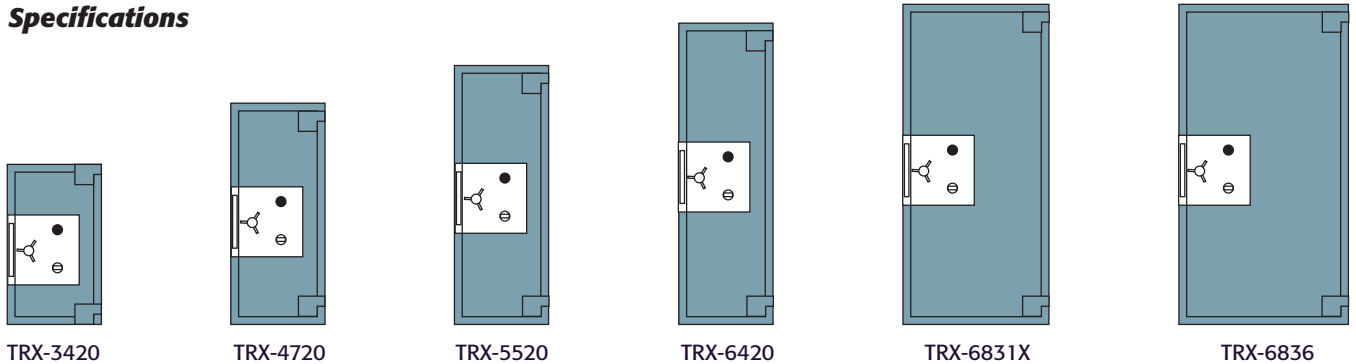

Model	Interior Dimensions (in)			Exterior Dimensions (in)			Capacity (ft ³)	Weight (lbs.)
	Height	Width	Depth	Height	Width	Depth		
TRX-3420	34	20	23	42.25	28.25	35.25	9.1	3,000
TRX-4720	47	20	23	55.25	28.25	35.25	12.5	3,500
TRX-5524	55	24	20	63.25	32.25	32.25	15.28	4,000
TRX-6420	64	20	23	72.25	28.25	35.25	17.0	4,700
TRX-6831X	68	31	19.75	76.25	39.25	32	24.1	5,800
TRX-6836	68	36	26	76.25	44.25	38.25	36.8	6,750

Add 2 in. to depth for handle projection. All specifications are approximate and subject to change without notice.
 Note: The best protection is a safe tailored to your needs and cash risk. Consultation with a security professional is advised.

Door Swing Dimensions (in)		
Model	A	B
TRX-3420	59.5	48.75
TRX-4720	59.5	48.75
TRX-5520	59.5	48.75
TRX-6420	59.5	48.75
TRX-6831X	71	73
TRX-6836	81.25	78.25

Distributed By:

SOCALSAFE
Since 1915

510 West Washington Blvd.
 Montebello, CA 90640
 (323) 724-5880 Telephone
 (800) 334-6060 Toll Free
 (323) 727-0236 Fax
www.socalsafe.com