

LiftMaster® Quick Install Guide

1 Disconnect Power to the Garage Door

2 Install MyQ® Control Panel

Complete installation guide can be found at:
[Alarm.com Dealer Site](#) > [Support & Sales](#) >
[Support Documents](#) > [Garage](#) > [LiftMaster MyQ Devices](#).



3 Reconnect Power to the Garage Door Opener

4 Connect the LiftMaster Internet Gateway



Green Light indicates the gateway is plugged-in and connected to the Internet.

5 Visit Alarm.com Customer Site or Dealer Site

Enable LiftMaster Garage Door Control add-on for the customer.

Register the Internet Gateway using the serial number on the back of the unit.



6 Follow Website Instructions to Learn-in the Garage Door Opener



Press the learn button two times.

7 Confirm Connection to Gateway



Yellow light will be replaced by a blue light to confirm that the opener is connected.

LiftMaster®

powered by  **ALARM.COM®**

MyQ® Upgrade Chart

Opener




**Liftmaster® Compatible
Opener Made After 1998**

Quick ID

LiftMaster, Chamberlain, Sears/Craftsman,
Raynor and AccessMaster opener

Look for a purple learn button
with purple antenna wire, or an orange/red
learn button with gray antenna wire*

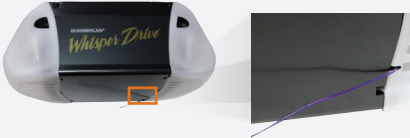

* Models 2500 and 2500C are not compatible. Manufacturer date
is also shown on the operator along with the serial number.

Equipment Needed

LiftMaster MyQ Internet Gateway 828LM
MyQ Control Panel 888LM

Opener



MyQ Enabled Opener

Quick ID

MyQ or AssureLink logo is on the opener
(LiftMaster or Craftsman)



Equipment Needed

LiftMaster MyQ Internet Gateway 828LM
(control panel is not needed)

Opener



Incompatible Opener

Quick ID

1) Other brand

2) Missing Safety Eyes



3) LiftMaster, Chamberlain or Craftsman
brand made before 1998

Equipment Needed

Contact LiftMaster dealer to replace operator.
dealerlocator.liftmaster.com