


## DO:

1. Use metal screw eyes and braided metal hanging wire for hanging artwork.
2. Install screw eyes in the top quarter of frame or back of piece.
3. Keep the apex of the hanging wire between 1"-2" from the top of frame.
4. Call us if you have any questions.






☐ Back of Artwork  
(Not To Scale)

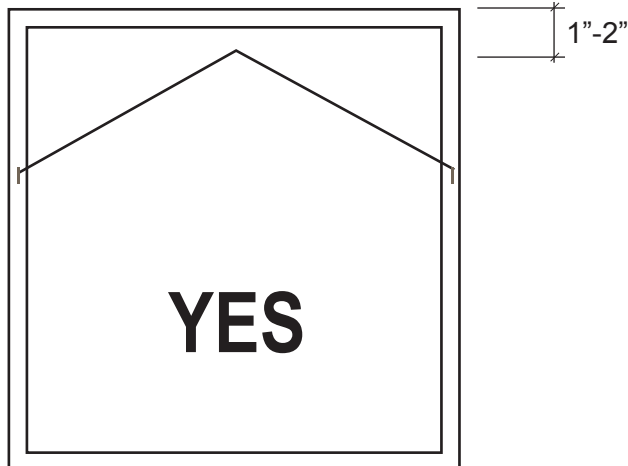


☐ Detail of Screw Eye and Hanging Wire  
(Not To Scale)

## DON'T:

1. Use any other hanging clips or saw tooth hangers.
2. Install the apex of the hanging wire beyond top of frame.
3. Install screw eyes too low on back of frame. This will make the piece tip forward when hung.
4. Freak out if your piece is not framed or you need help with hanging materials. Simply come to the workshop on **Saturday, Jan 29 1:00-2:30** and we'll help you prepare your work for exhibit.

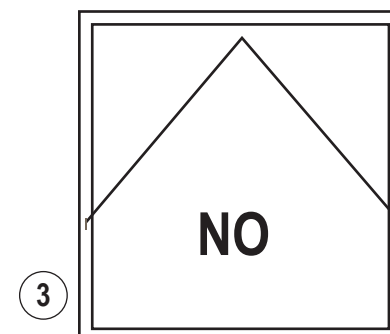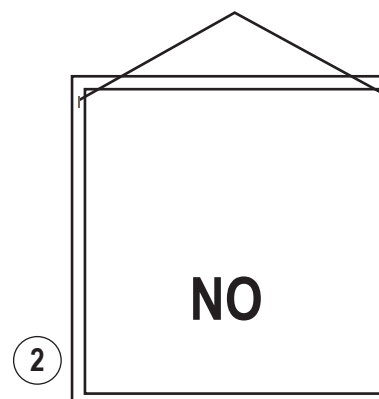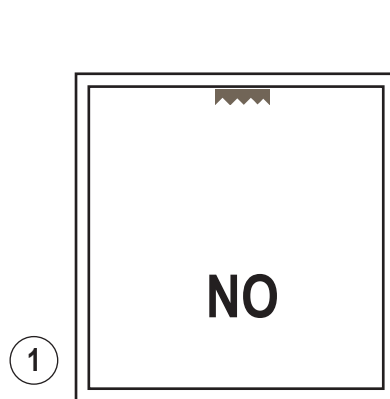

☐ Detail of Saw Tooth Hanger  
(Not To Scale)



**PONSHOP** Studio and Gallery  
712 Caroline Street, Fredericksburg, VA 22401  
www.ponshopstudio.com (540) 656-2215

**Gallery Hanging Requirements**

Revised: 12/15/2010