


CLEANspace™

by qüb9® ENVIRONMENTAL

Model **3PE**


PORTABLE DECONTAMINATION ENCLOSURE SYSTEM 5-STAGE, PERSONAL REMOTE / ATTACHED *Meets/Exceeds OSHA Regulations*

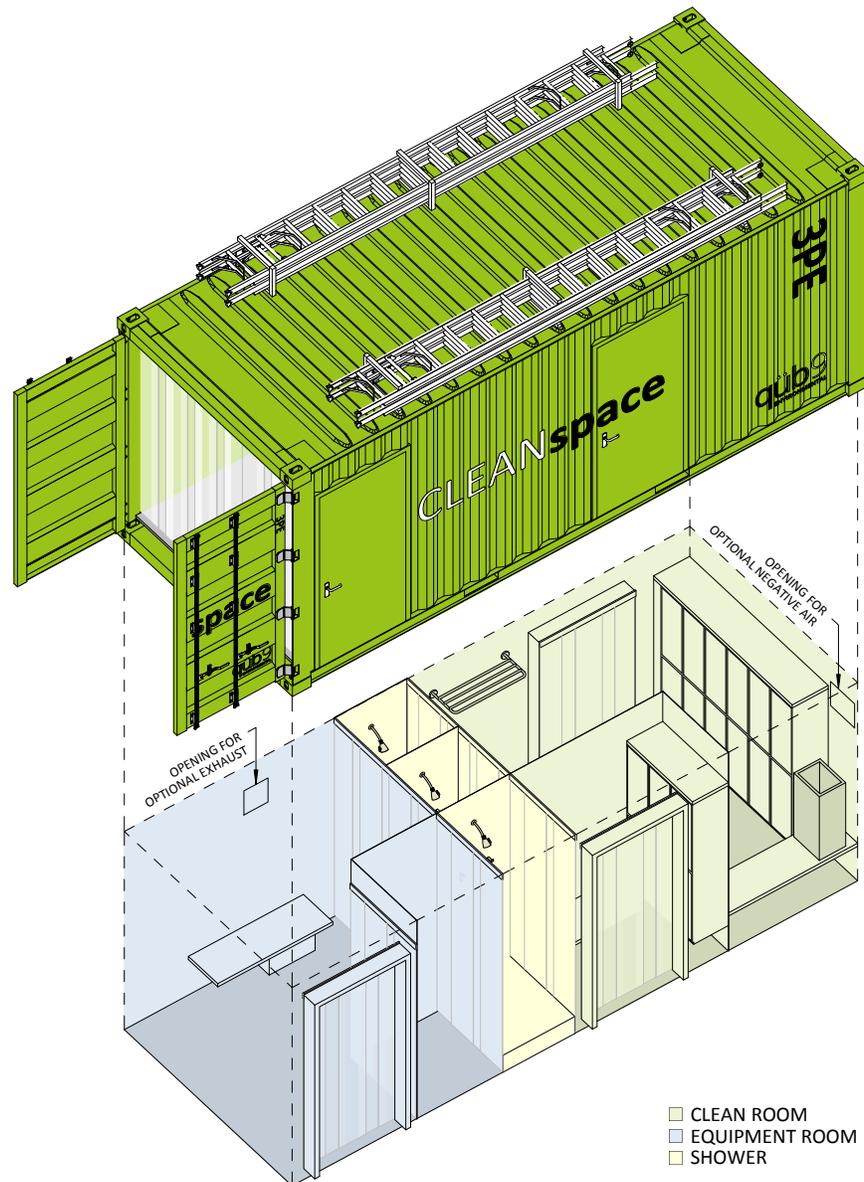

FOR ABATEMENT PROFESSIONALS

1. Complies with OSHA Regulation: 29 CFR Part 1926.1101.

3PE 3-Stage Portable Remote / Attached Decontamination Enclosures from qüb9 provide professional asbestos and lead abatement contractors with safe, convenient plug-and-play operation and an accelerated return-on-investment. The **3PE** is the most cost-effective, efficient and ergonomic personal decontamination platform available.

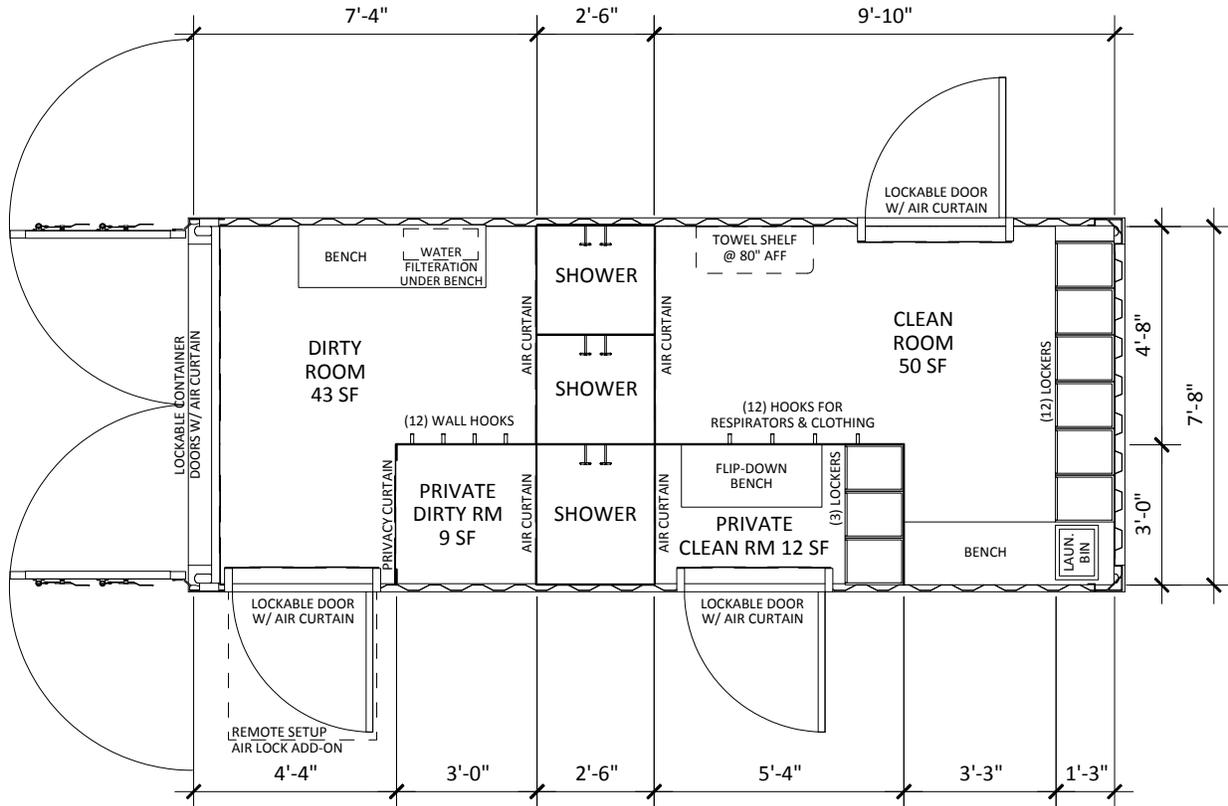

MODEL 3PE - FLOOR PLAN

- Compliance:** USDOL: OSHA: 29 CFR Part 1926.1101(j)(1).
- Useful Life:** 20+ years; its a COR-TEN shipping container after all.
- Warranty:** 10-Year Limited Warranty with Parts and Labor.
- Deployment:** Anywhere; average contract cost to transport 30-miles by conventional tilt-bed tow truck: \$106.00; placement within inches - no labor, registration, plates, over-the-road liability.
- Crane:** Lifting points support 15,000#
- Maintenance:** Hose it out when it's dirty.
- Professionalism:** Institutional appearance; Industrial durability.
- Plug and Play:** Attach hose and power cord.
- Construction:** Welded steel structure.

Continued:

Reductions: Deployment costs; maintenance labor; consumables, consumable waste, service labor; decontamination construction time, labor, materials; decommission time and labor; depreciation.

Eliminates: In-house deployment labor / driver; trailer titles; taxes; plates; OTR/tow package insurance; wiring issues; 6 mil plastic and curtain replacement (NY); unit decay; inspection issues related to both unit quality control and shift size.

Additional Features:

Materials:

Structure made of A588 high-corrosion-resistance structural steel designed for marine / shipping environments; industrial enamel finish; Interior coated with impermeable direct to metal epoxy; 1.125" marine-rated subfloor sealed with epoxy and rubberized non-skid.

Equipment Room:

43 SF, walk-off pan, boot storage shelves, hooks, suit disposal drum, easily accessible mechanicals, 2-gang GFCI protected receptacles, hose bib, cold-weather purge system, wall-mount First Aid station, shelves and enclosed storage containers with inventory control tabs for bags, filters and miscellaneous job site consumables. Optional: Hepa Negative Air system.

Privacy Dirty Room:

9 SF, changing room with suit disposal.

Shower Space (3 showers):

On demand hot water, 306 stainless or, optional aluminum, shower walls, floor grids and 60-gallon gray-water reservoir, water-saving push-button valve and hot/cold adjustable mixing-valve with preset at the tap. Fire-retardant air-curtains simultaneously isolate contaminants, water and humidity. Wall-mounted shower-gel dispenser, respirator hook and water-locked filter disposal is standard in each shower. Optional: Holding tank.

Privacy Clean Room:

12 SF, isolated Clean Room, exit door, bench with 3 lockers, respirator shelf, towel shelf, 3-wall hooks.

Clean Room:

50 SF, 12-wall-mounted lockers (12"W x 32"H x 15"D) installed above finished floor for easy cleaning. Wall-mounted folding polyethylene dressing bench, polyethylene floor bench, AirCurtains for privacy and air-control. Storage for Personal Protection Equipment(PPE), 12-wall-mounted jacket / respirator hooks, laundry depository, Ceiling-mounted electrical panel and in-line water heater near exterior door, 12-device charging ports.

Water Filtration:

Dual in-series 20/5 micron gray-water filtration system with GFCI protected pump and 5/8" discharge. **Optional:** holding tank.

Specifications:

Structure:	A588 high-corrosion resistant steel superstructure and partition walls.
Exterior:	8'-0" W x 8'-6" H x 20'-0" L
Interior:	7'-10" W x 7'-10" H x 19'-10" L
Exterior Coatings:	DTM primer; UV stable industrial enamel; Custom colors available.
Interior Coatings:	Impermeable epoxy coating, anti-microbial protectant.
Subfloor:	1.125" marine-rated plywood with epoxy coating, rubberized non-skid.
Transport Payload:	4,000 lbs. tools & equipment; 112 SF / 784 CF.
Working Storage:	2,250 lbs. tools & equipment; 52 SF / 350 CF.
Tare Weight:	4,420 lbs.
AirCurtains:	PVC 100% overlap transparent 122 mil retardant NFPA B-s3-d0 fire class
External Power:	12/3 oil-resistant pigtail with locking, weather-proof connection;
On-board Power:	Ceiling mounted EMT with GFCI protected devices.
Power2:	Optional: 2Kw generator with isolated enclosure / fuel storage;
Lighting:	LED fixtures rated for wet conditions, warranted for life of unit;
Water Supply:	50' x 5/8" NPT, NSF approved supply hose;
Water Heater:	Inline high-efficiency on-demand electric water heater
Water Filtration:	Guardian™ PuroLoc™ 2205 2-stage 20/5 Micron gray-water filtration;
Reservoir:	60-gallon surplus reservoir.
Holding tank:	Optional;
Discharge:	50' x 5/8" standard reinforced oil resistant hose;
Leveling:	Built-in spirit levels for leveling assistance;
Graphics/Branding:	Options available in vinyl or custom paint by quotation;
Ladder Racks:	Optional
HVAC:	Optional

10-Year Warranty with Transferable Option:

For a period not to exceed **Ten-Years**(10-Years) from the date of manufacture, qüb9 will **repair or replace for the Original Buyer or Transfer Buyer, at our expense, any manufacturer's defect in workmanship.** Upon the occasion of: (1) immediate written notice to us by (a) the Original Purchaser or, (b) the Transfer Purchaser and, after: (2) our inspection of the subject defect and determination of liability by us, we will at our option repair or replace the defective component(s). **This includes labor and materials** at our facilities or, at qüb9 authorized facilities in your area. **qüb9 shall not be responsible for shipping, handling or delivery** in either direction of unit to any location for any purpose under this Warranty.

Printed Materials, Copyright Notice & Disclaimer:

©2015, qüb9, inc. All Rights Reserved. No reproduction of any portion of this material is permitted without express written permission of qüb9, Inc. Illustrations and specifications contained in this material are based on the latest information available at time of printing. qüb9, Inc. reserves the right to make changes to product designs, specifications, materials, colors, at any time, without notice.

® qüb9, inc.

620 Park Avenue
 Box 377
 ROCHESTER, NEW YORK 14604

CONTACT: info@qub9.com
 (585) 484-1808
 qub9.com