

# LED Light Tech™ Plug & Play PLUS™ 2 foot LED Tube Compatible with Electronic Ballast

LED Light Technology Ballast Compatible LED Plug & Play PLUS™ tubes use a patented electrical circuit which is compatible with electronic and inductive ballasts. Our LED Plug & Play PLUS™ tube is easy to install. There is no rewiring needed!

In addition the PLUS unique feature allows this LED tube to be used AFTER the ballast fails by bypassing the ballast and operating on line voltage. This is a unique and valuable feature. You save energy immediately and after the ballast fails without replacing the LED tubes.

## SPECIFICATIONS:

- Watts: 10W
- Input Voltage: 100-277 VAC
- Frequency: 50/60 Hz
- Power Factor: > 0.95
- Base: G13
- Reliability Life: 50,000 Hours
- Beam Angle: 180°
- Color Temperature: 3000K, 4000K, 5000K
- Lumens: 1,000lm
- CRI: ≥ 82
- THD ≤ 18%
- SDCM ≤5.0
- Operating Temperature -25°- +40° C
- Certificates/Ratings: UL/cUL, FCC, RoHS




## FEATURES & BENEFITS:


- Compatible with electronic and inductive ballasts- No rewiring needed!
- Direct replacement for traditional fluorescent tubes- No need to rewire!
- **AFTER the ballast fails it works directly on line voltage 90-277VAC after bypassing the ballast**
- 5 year warranty.

**CCT AND SDCM:**


**3000K:**

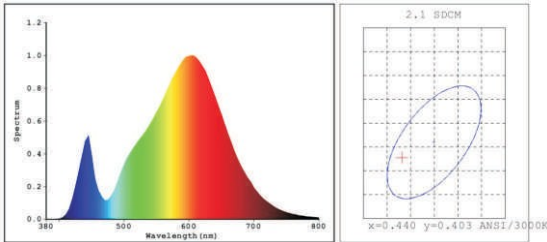


**4000K:**

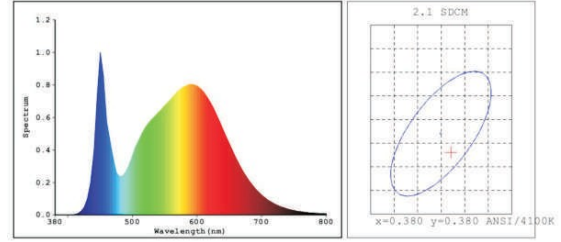

**5000K:**

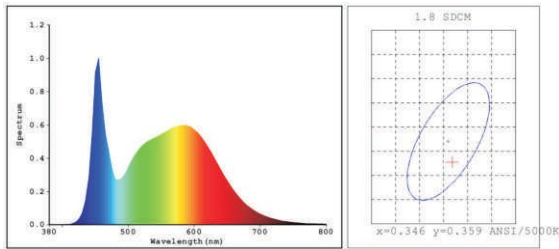

**6500K:**

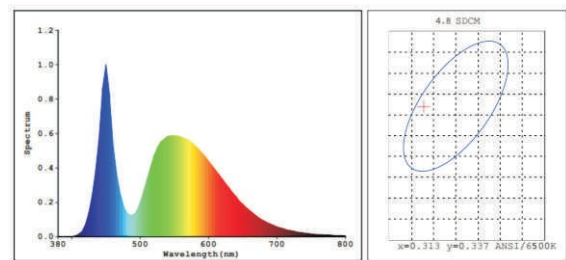

**PRODUCT ORDER CODE:**

Product Order Code Example: LLT-44-T82-P&P+-10-(Color)-(Diffuser)

LLT	44	T82	P&P+	10	(Color)	(Diffuser)
					Select	Select
					3000	Frosted
					4000	Clear
					5000	

