

## CAT III compatible High-Voltage and True-RMS Measurements

High-speed High-Voltage  
Isolated 4 channel Data Logger

# midI LOGGER HV GL2000

High speed 1 MS/s simultaneous sampling  
with voltage and temperature measurement

<b>Voltage</b>	20 mV to 1000 V DC, 1-5 V DC 10 mV to 1000 V rms	<b>Pulse</b>	4 channels (*1) Accumulating, instant or RPM
<b>Temp</b>	Thermocouples: K, J, E, T, R, S, B, N, W (WR5-26)	<b>Logic</b>	4 channels (*1)
<b>Humidity</b>	0 to 100% (the B-530 option is required)		

### Safer input terminal

Isolated BNC and screw terminal for each channel



### Available input signal cable



\*1: Select either Pulse input or Logic input, and use the optional input/output cable for GL (B-513 option).  
\*2: Use with RIC-147.  
\*3: Max. rated safety voltage:  $\pm 600$  V DC or 600 V rms  
\*4: Numbers are approximate and under the following conditions.  
· Using 4 channels of analog input only and data is saved as a GBD file.  
· External memory device is set to SD flash memory card or USB flash memory with 8 GB or more data capacity.  
· File size of captured data is up to 4 GB.



Corresponds to CAT III 600 V  
and 600 V rms measurement

Supports CAT III 600 V measurement category and can measure voltage fluctuation on power line for peak to peak and RMS measurements. Voltage range up to 1000 V at DC and rms value (\*3)

### Additional memory function

- Long term recording capability  
4 M sample/ch built-in RAM and 4 GB built-in Flash memory.  
Continuous measurement supports up to 4 GB per file.

Memory type (*4)	1MS/s (1 $\mu$ s)	100kS/s (10 $\mu$ s)	1kS/s (1ms)	1S/s (1s)
Built-in RAM (4 M samples/ch)	4 seconds	40 seconds	66 minutes	46 days
Built-in Flash memory (3.9 GB)	N/A	N/A	3 days 19 hrs	Over 1 year
External memory (SD/USB Flash memory)	N/A	N/A	4 days 3 hrs	Over 1 year

- Large built-in RAM (4 million samples per channel)  
Built-in RAM can divide into 1, 2, 4, or 8 blocks supporting continuous high-speed recording measurement with auto backup on the internal Flash memory or USB.
- Dual external recording available through USB and SD Card Flash memory  
Both the USB Flash memory device and the SD Flash memory card can be used as external storage device for captured data.

### High performance and easy to use software for PC


#### Standard software: GL980\_2000-APS

- Easy connection made possible with automatic search function for connected device.
- Multiple display format using Y-T graph, X-Y graph and digital values.
- Supports real time data transfer up to 1 ms sampling interval. Captured data from the built-in RAM can also be displayed.
- Captured data saved in binary format can convert to CSV format.

#### Functions

- Configure GL unit
- Control GL unit
- Real-time data display
- Replay saved data
- Data format conversion

Y-T graph (waveform) display

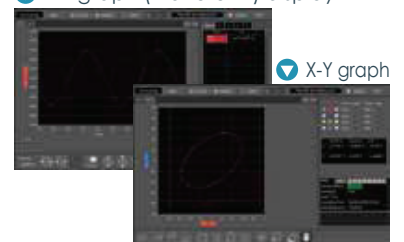

Main unit specifications		
Item	Description	
Number of analog input channels	4 channels	
External input/output	Input (*1)	Logic or Pulse (4 channels), Trigger or Sampling (1 channel)
	Output (*2)	Alarm (4 channels) or Trigger (1 channel) with Alarm (3 channels)
Trigger function	Trigger action	Start or stop capturing data by triggering
	Repeat action	Off, On (Re-armed automatically)
	Trigger source	Start/Stop : Off, Measured signal, Alarm, External, Scheduled time, Scheduled day, Elapsed time
	Combination	Level OR, Level AND, Edge OR, Edge AND
Alarm function	Threshold	High or Low in level mode, Rising or Falling in edge mode, Window-in (*3), Window-out (*3)
	Alarm action	Display and outputs a signal when alarm is detected
	Combination	OR (Source channel can be assigned with OR condition to output port)
Calculation function	Threshold	• Analog input : High, Low, Window-in, Window-out • Logic input : H or L • Pulse input : High/Rising, Low/Falling, Window-in, Window-out
	Between channels	Addition, subtraction, multiplication and division for two analog inputs (only in GBD format)
Statistical	Real-time or between cursors in replay captured data • Function : Max., Min., Peak-to-Peak, Average, RMS (only for replay)	
Scaling (Engineering unit) function	Measured value can be converted to the specified engineering unit	
Storage device(*4)	Built-in RAM	Four million samples for each channel (Memory partition: 4 M samples x 1 bank, 2 M sample x 2 banks, 1 M samples x 4 banks, 512 k samples x 8 banks)
	Built-in Flash	4 GB (for capacity of data: approx. 3.9 GB)
	External USB	Support USB Flash memory device (*5) by USB2.0 Type A port, No memory capacity limit (*6)
	External SD card	Support SDHC memory card (up to 32 GB) by SD Card slot (*6)
Capturing mode	Mode	Off (Normal), Ring, Relay
	Off (Normal)	Save data between start to stop
	Ring	Save most recent data of specified number • Destination : Built-in RAM, Built-in Flash, USB or SD • Number of capturing data: 1000 to 10000000 points (*7) • Sampling : 1 MS/s (interval 1 μs) in built-in RAM, 1 kS/s (interval 1 ms) with GBD format in other device, 100 S/s (interval 10 ms) with CSV format in other device
Relay	Save data to multiple files with specified capturing time or file size (up to 4 GB) until recording data is stopped • Destination of data : Built-in Flash, USB or SD • Sampling : 1 kS/s (interval 1 ms) with GBD format, 100 S/s (interval 10 ms) with CSV format	
Data backup	Interval	Off, 1, 2, 6, 12, 24 hrs., specific time, or any time with key operation
	Data destination	Built-in Flash memory, USB memory device, SD Flash memory card
Display (LCD)	Hot-swapping	USB Flash memory device or SD Flash memory with key operation
	Size	7-inch TFT color LCD (WVGA : 800 x 480 dots)
Interface to PC	Information	Waveform in Y-T with digital values, Enlarged waveforms, Digital values and statistics values, X-Y graph
	Type	Ethernet (10 BASE-T/100 BASE-TX), USB2.0
Operating environment	Ethernet functions	Web server function, FTP server function, NTP client function, DHCP client function, Email send function
	USB function	USB mode (File transfer and deletion from internal GL980 memory)
Power source	0 to 40 °C when driven by AC adapter or battery, 5 to 85 % RH (non condensed)	
Power consumption	AC adapter	100 to 240 V AC, 50/60 Hz
	DC power	8.5 to 24 V DC
External dimensions [W×H×D]	Battery pack : Mountable two battery packs (*8)	
Weight	Approx. 260 x 161 x 83 mm (with the cover)	
Vibration resistance	Approx. 1.7 kg (the cover is attached, AC adapter and batteries are not included)	
	Compatible with JIS Vibration test method for automobile Type 1 Class A (Vibration durability test: 5 m/s <sup>2</sup> )	

- \*1: Select either Logic input (4 channels) or Pulse input (4 channels), select either external Trigger input or Sampling input. Required Input/Output cable for GL series (B-513) option for connecting signal.
- \*2: Select either Trigger output (1 channel) or Alarm output (1 channel). Available 3 channels Alarm output always. Required Input/Output cable for GL series (B-513) option for connecting signal.
- \*3: Not available with logic input.
- \*4: Saved contents in built-in RAM: Captured data Saved contents in built-in Flash, USB memory or SD memory card : Captured data, Setting conditions, Screen copy
- \*5: Standard USB memory devices are required.
- \*6: File size of aptured data is upto 4 GB.
- \*7: When using built-in RAM, 10 to 4000000 points
- \*8: Required two batteries (B-569) packs when in battery mode.
- \*9: Connections can be made individually to BNC terminal or M3.5 screw terminal. Those are connected to the same channel.
- \*10: When using built-in Flash, SD memory card and USB memory, sampling is 1 kS/s to 1 S/m (1 ms to 60 s). When using the External, required Input/Output cable for GL series (B-513) option for connecting signal.
- \*11: Measures the accumulated value of the DC and AC components in effective value, that is a true-RMS.
- \*12: Graphtec does not support software/driver used with operating systems that have become obsolete and are no longer supported by the OS developer.  
In the Windows 7, edition of Ultimate, Enterprise, Professional and Home Premium are supported.
- Due to the possibility of equipment or PC failure, the data files on the instrument are not guaranteed to hold memory. Please make a backup of data whenever possible to avoid data loss.
  - Brand names and product names listed in this brochure are the trademarks or registered trademarks of their respective owners.
  - Specifications and details are subject to change without notice. For additional information, please check our web site or contact your local representative.

Analog input specifications		
Item	Description	
Type of input terminal	Isolated BNC connector and Screw terminal (M3.5 screw) (*9)	
Input method	All channels isolated unbalanced input, Simultaneous sampling	
Sampling speed (interval) (*10)	1 M Samples/s to 1 Sample/min (1 μs to 1 min) and External	
Frequency response	DC to 200 kHz (within +1/-4 dB)	
Measurement range	Voltage (DC)	20, 50, 100, 200, 500 mV, 1, 2, 5, 10, 20, 50, 100, 200, 500, 1000 V, and 1-5V F.S. (Max. rated safety voltage: ± 600 V DC)
	Voltage (DC-RMS) (*11)	10, 25, 50, 100, 250, 500 mV rms, 1, 2.5, 5, 10, 25, 50, 100, 250, 500, 1000 V rms F.S. (Frequency response: 20 Hz to 10 kHz) (Crest Factor : up to 1.4 at 1000 V rms range, up to 2 in other range)
	Temperature	Thermocouple: K, J, E, T, R, S, B, N, W (WRe5-26)
	Humidity	0 to 100 % RH - using the humidity sensor (option B-530)
Filter (Low pass)	Off, Line (1.5 Hz), 5, 50, 500 Hz, 5, 50 kHz (at -3dB, -6dB/oct)	
A/D converter	16-bit (effective resolution: 1/40000 of the measuring full range)	
Maximum input voltage	(+) to (-) terminal	20 mv to 2 V range: 30 V DC/AC, 5 V to 1000 V range: 600 V DC/AC
	Between channels	600 V DC/AC (CAT III)
Maximum voltage (withstand)	channel - GND	600 V DC/AC (CAT III)
Maximum voltage (withstand)	Between channels	5400V DC/AC (1 minute)
	Between channels - GND	5400V DC/AC (1 minute)

External input/output specifications		
Item	Description	
Input signal specification for Logic/Pulse and	Voltage range : +5 to +30 V (common ground) In Logic/Pulse, Threshold : Approx. +2.5 V In Trigger/Sampling, Threshold : Approx. +1.9 V	
Logic measurement	Measures the status (H or L) of the signal input to each channel	
Pulse measurement	Measurement	Counts pulse signals input to each channel
	Max. pulse input	Max. input frequency : 100 kHz, Maxi. count number : 15 M count
	Count detection	10 μs to 1 hr. (Set separately from analog signal sampling interval)
Measurement mode	Measurement mode	• Rotation : Counts pulses and converts to rotation in rms, span is up to 500 M rpm
		• Accumulating: Accumulates pules counts from the start, span is up to 20 M count (it is set automatically)
		• Instant : Counts pulses per detection cycle, spans up to 20 M count
External trigger input (*10)	Executes specified trigger action	
External sampling input (*10)	Executes sampling of measurement signal with each external sampling signal, max. input frequency is 100 kHz	
Output signal	Alarm output	Open collector (pull-up to 5 V with 10 kΩ resistor), maximum load is the 24 V and 100 mA
	Trigger output	When a trigger is detected, 500 μs width pulse is released

Software specifications		
Item	Description	
Model name	GL980_2000-APS	
Supported OS (*12)	Windows10, 8.1, 8, 7 (SP1 or later)	
Functions	Control the GL series, Real-time data capture, Replay data, and Data format conversion	
Supported device	1 unit of GL980 or GL2000	
Settings control	Input condition, Capturing condition, Trigger/Alarm condition, etc.	
Transfer of captured data from GL2000	In memory capturing	Transfer the captured data to a PC sequentially while data is being saved in built-in RAM, sampling interval is 1 μs to 60 s
	In real time capturing	Transfer the captured data to a PC while data is being saved in built-in flash memory, SD memory card or USB memory In GBD and CSV format, sampling interval is 1 ms to 60 s
Displayed information	Analog, Logic, Pulse count waveform, and Digital value	
Display mode	Y-T waveform, Digital values, X-Y graph	
File operation	Converting data format to CSV from GBD binary with data between cursors or all data	
Past data screen function	Displays the current data or past part of data by switching. Available at sampling speed 1 kS/s to 1 S/m (1 ms to 1 min sampling interval)	
Statistical calculation	Max., Min., Average and Pack-to-Peak value during data capturing	

Standard accessories	
• AC adapter with power cable	• Quick start guide and Safety guide
• CD-ROM (PC application software, User manual)	• Cover (attached to the main body)
• Tilt stand set (including mounting screws M4)	• Screws (M3.5) for input terminal
• Ferrite core (attach to cable for radiation reduction)	

Options and Accessories		
Item	Model No.	Description
Input/Output cable for GL	B-513	2 m long (no clip on end of cable)
DC drive cable	B-514	2 m long (no clip on end of cable)
Humidity sensor	B-530	With 3 m long signal cable (with power plug)
Shunt resistor	B-551	250 ohms (Converts signal from "4-20mA" to "1-5V".)
Battery pack	B-569	Rechargeable Lithium-ion battery (7.2 V, 2900mAh)
Bracket for DIN rail	B-570	Bracket for DIN rail (GL2000 main body), Build-to-order
Carrying case	B-581	Used with GL980, GL2000 (Comming soon)
Input cable, Safe probe - BNC	RIC-141A	Insulated, 1:1 (42p), 1.2 m long, 300 V DC, CAT II
Input cable, BNC - BNC	RIC-142	Insulated, 1.5 m long, 1000 V DC, CAT II
Input cable, Banana - BNC	RIC-143	Insulated, 1.6 m long, 600 V DC, CAT II
Clip, Alligator (small size)	RIC-144A	For RIC-143,147 Aperture 11 mm, 300 V DC, CAT II, Max. 15 A
Clip, Alligator (middle size)	RIC-145	For RIC-143,147 Aperture 20 mm, 1000 V DC, CAT II, Max. 32 A
Clip, Grabber	RIC-146	For RIC-143,147 Aperture 5 mm, 1000 V DC, CAT III, Max. 1 A
Input cable, Banana - BNC	RIC-147	Insulated, 1.6 m long, 1000 V DC, CAT II
Input terminal adapter	SMA-102	Banana (receptacle) to BNC (plug), Insulated
AC Adapter	ACADP-20	Input: 100 - 240 V AC, Output: 24 V DC



Use equipment correctly and safely!

Use only in accordance with product's user manual.

To avoid malfunction or an electric shock by current leakage or voltage, please ensure ground connection and use according to the specifications.