



Front Elevation

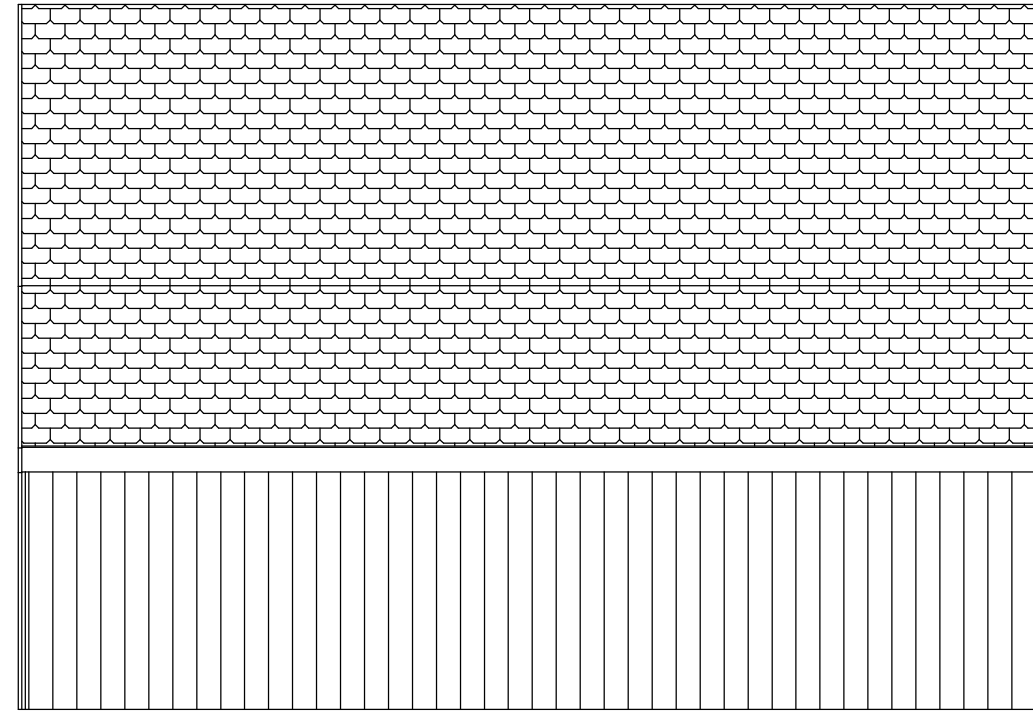


Back Elevation

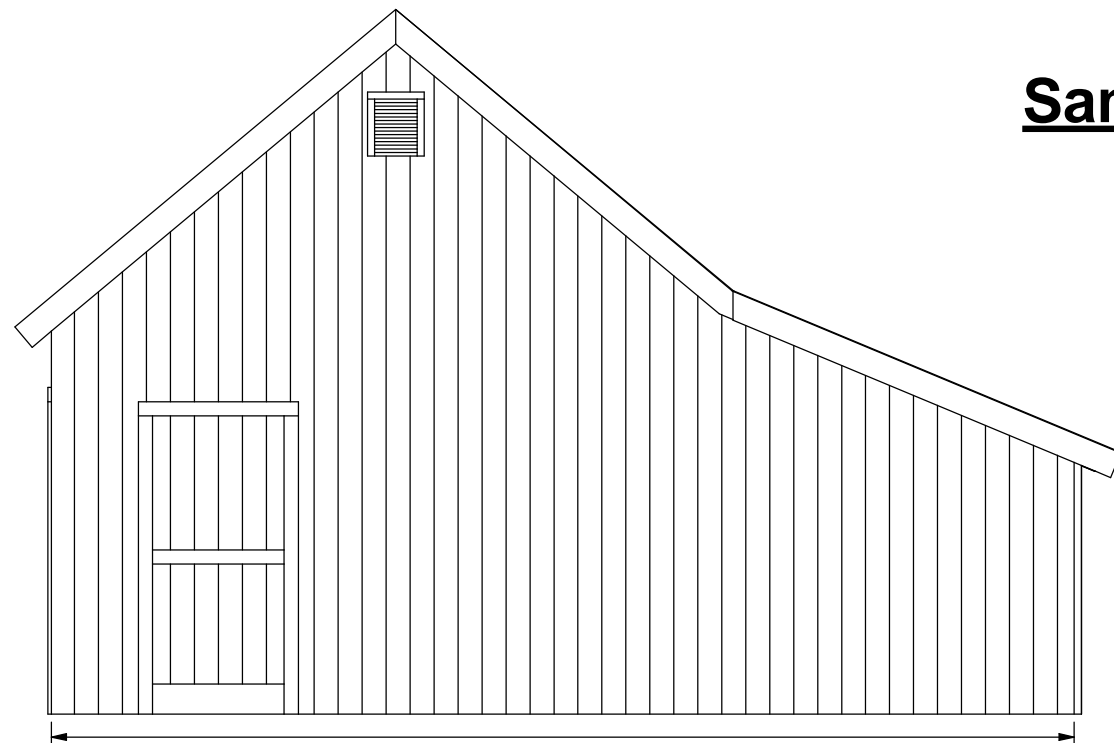

Right Elevation

**Sample Elevations:**

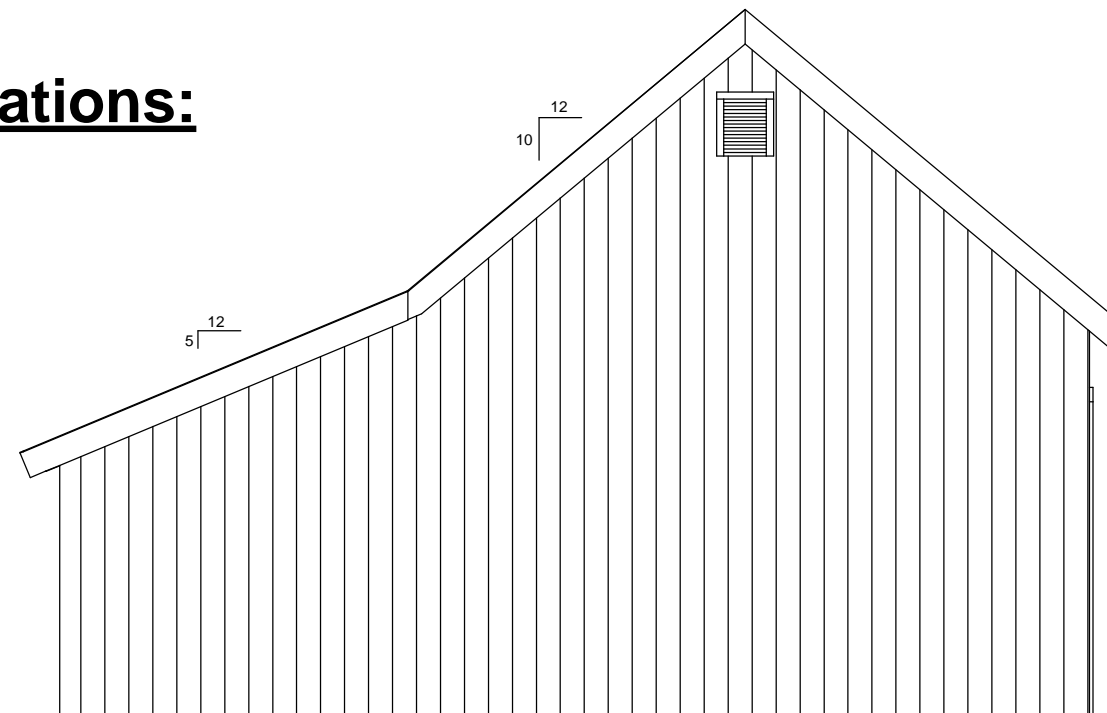

Left Elevation



COPYRIGHT LAWS PROHIBIT REPRODUCTION OR USE OF THIS DRAWING, IN WHOLE OR IN PART, WITHOUT THE EXPRESSED WRITTEN PERMISSION OF CONNECTICUT POST AND BEAM, LLC.

DO NOT SCALE DIMENSIONS ON THESE DRAWINGS. THESE IMAGES ARE MACHINE REPRODUCTIONS AND MAY CONTAIN A MARGIN OF ERROR.



Revisions:  
23-09-2013

DRAWING INFO:  
Elevations

DRAWING No. 009  
PRINTED: 04-04-2016





COPYRIGHT LAWS PROHIBIT REPRODUCTION OR USE OF THIS DRAWING, IN WHOLE OR IN PART, WITHOUT THE EXPRESSED WRITTEN PERMISSION OF CONNECTICUT POST AND BEAM, LLC.

DO NOT SCALE DIMENSIONS ON THESE DRAWINGS. THESE IMAGES ARE MACHINE REPRODUCTIONS AND MAY CONTAIN A MARGIN OF ERROR.



Revisions:  
25-09-2013

DRAWING INFO:  
Manifest

DRAWING No. 026  
PRINTED: 04-04-2016

Bundle	Category	Part	Qty	Part Description	Species	MATERIAL	Condition
	Base	PTJ1	5	Pressure Treated Joist	Southern Yellow Pine	2 x 6 x 16	PRE-CUT
	Frame	P1	4	POST	EWP- Rough Cut	6 x 6 x 7	PRE-CUT
	Frame	P2	1	POST	EWP- Rough Cut	6 x 6 x 7	PRE-CUT
	Frame	P3	2	POST	EWP- Rough Cut	6 x 6 x 7	PRE-CUT
	Frame	P4	1	POST	EWP- Rough Cut	6 x 6 x 10	CUT TO FIT ON SITE
	Frame	P5	2	POST	EWP- Rough Cut	6 x 6 x 4	PRE-CUT
	Frame	P6	1	POST	EWP- Rough Cut	6 x 6 x 4	PRE-CUT
	Frame	PB1	4	PLATE BEAM	EWP- Rought Cut	6 x 12 x 12	PRE-CUT
	Frame	PB2	2	PLATE BEAM	EWP- Rought Cut	6 x 10 x 12	PRE-CUT
	Frame	TB1	2	TIE BEAM	EWP-Rough Cut	6 x 8 x 16	PRE-CUT
	Frame	TB2	2	TIE BEAM	EWP-Rough Cut	6 x 6 x 8	PRE-CUT
	Frame	R1	7	Front rafters	EWP- Rough Cut	4 x 8 x 12	PRE-CUT
	Frame	R2	7	Back rafters	EWP- Rough Cut	4 x 8 x 12	PRE-CUT
	Frame	R3	7	Shed rafters	EWP- Rough Cut	4 x 8 x 10	PRE-CUT
	Frame	SN1	16	SIDING NAILERS	EWP- Rough Cut	3 1/2 x 3 1/2 x 8	CUT TO FIT ON SITE
	Frame	SN2	8	SIDING NAILERS	EWP- Rough Cut	3 1/2 x 3 1/2 x 12	CUT TO FIT ON SITE
	Frame	SC1	5	SILL PLATE / COVER	EWP- Rough Cut	3 1/2 x 6 x 8	CUT TO FIT ON SITE
	Frame	SC2	3	SILL PLATE / COVER	EWP- Rough Cut	3 1/2 x 6 x 12	CUT TO FIT ON SITE
	Frame	DB1	4	DOOR BUCKS	EWP- Rough Cut	4 x 6 x 8	CUT TO FIT ON SITE
	Frame	DH1	2	DOOR HEADER	EWP- Rough Cut	4 x 6 x 8	CUT TO FIT ON SITE
	Frame	RB1	2	RIDGE BEAM	EWP- Rough Cut	2 x 10 x 12	PRE-CUT
	Frame	KB1	26	KNEE BRACES	EWP- Rough Cut	3 1/2 x 5 x 36"	PRE-CUT
	Fasteners	F-3	42	Timber Screws	Fasten Master	6"	Attach collar tie to rafter(3 per side)
	Fasteners	F-4	150	Timber Screws	Fasten Master	8"	Attach Rafters/knee braces
	Fasteners	F-5	50	Timber Screws	Fasten Master	10"	Attach Rafters- BOTTOMS
	Fasteners	F-7	10 LBS	Deck Screws	Deck Fast	3"	Pin framing/siding nailers
	Fasteners	F-8	26	T-Rex Connectors - CR 6060	6061 Aluminum	6 x 6	Post to plate beam
	Fasteners	F-9	4	T-Rex Connectors- CR 6080	6061 Aluminum	6 x 8	Tie Beam to post
	Fasteners	F-11	60	T-Rex Pegs- CR 1009 ?	Aluminum	1/2" x 6"	Peg plates
	Fasteners	F-12	114	T-Rex Fasteners	GRK RSS	5/16" x 5	Screw plates
	Fasteners	F-13	66	Concrete Screws	GRK Caliburn	5/16" x 5	Plates in to concrete