


P/N: DL-CP3B-95WSXYA1-ab

Note:

- DL= Company name
- CP3B = Product series, LED Canopy Light
- 95W = Rating Power
- S=Driver manufacturer, SOSEN
- X=LED manufacturer, Hongli 2835
- Y= Cover type, striped lens
- A1 = Version number
- a = Housing colors, WH=White
- b= CCT, b=27~65, for 2700K~6500K



DIMENSIONS

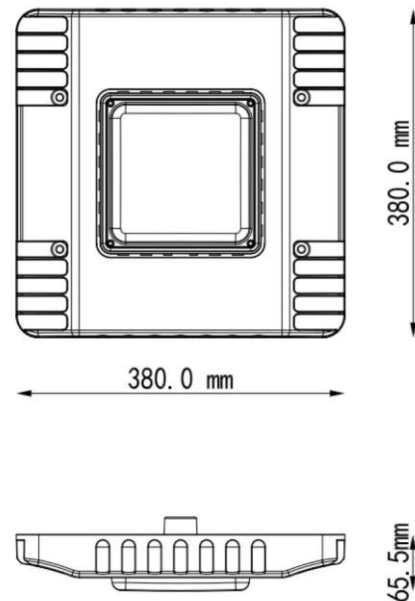

ADVANTAGE

- UL cULcertificate.
- IP65 driver, input voltage 100-277VAC.
- No UV or IR in the beam.
- Easy to install and operate.
- Energy saving, long lifespan.
- Light is soft and uniform, safe to eyes.
- Instant start, NO flickering, NO humming.
- Green and eco-friendly without mercury.

APPLICATION

- Widely used in gas station, service station, underground parking lot, warehouse, garage




SPECIFICATIONS

OPTICAL	Input Power	95W
	Lumen	12160-13110LM
	Lumen Efficacy	128-138 LM/W
	Color Temperature	2700-6500K
	CRI	>80
	Viewing Angle	120 Degree
ELECTRICAL	Input Voltage	100-277VAC 50/60Hz
	PF	≥0.9
	THD	≤20%
	Driver Model	China Brand Driver (SS-100VA-56B)
MATERIALS	LED Brand	HongLi
	LED Type	SMD2835 (0.5W)
	LED QTY	300 PCS
	Housing	Aluminum Alloy
	Housing Color	White
	Cover	Stripe Lens
	Waterproof Rating	WET (IP65)
OTHERS	Operating Temperature	-40°C TO +45°C
	Operating Humidity	10%-90% RH
	Storage Temperature	-40°C TO +80°C
	Storage Humidity	10%-95% RH
	Warranty Time	5 Years

PACKAGE

	Size	Qty/ Carton	Lamps Net Weight	Weight/ Carton
Outer box	425 x 420 x 120mm	1 PC	4.36KG	5.2KG

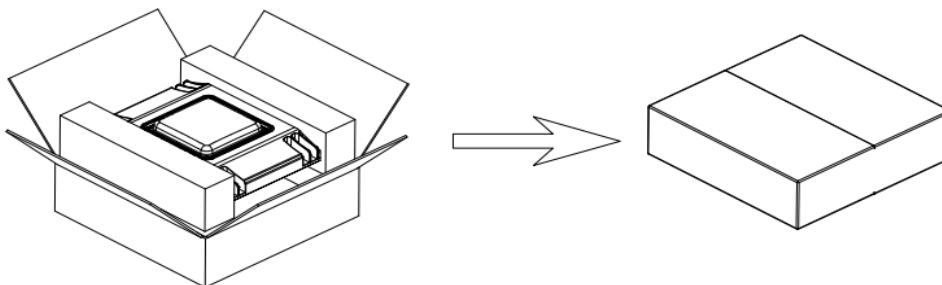

LIGHT DISTRIBUTION TESTING PARAMETERS

Luminaire Property

Luminaire Manufacturer:

Voltage: 119.7 V

Power: 94.91 W

Current: 0.795 A

Power Factor: 0.997

Photometric Results

IES Classification: Type II

Total Rated Lamp Lumens: 13127.7 lm

Efficiency: 100%

Upward Ratio: 2%

Central Intensity: 4232.51 cd

Pos of Max. Intensity: H180 V4

Longitudinal Classification: Very Short


Measurement Flux: 13127.7 lm

Downward Ratio: 98%


Luminaire Efficacy Rating (LER): 138.37

Max. Intensity: 4321.53 cd

Luminous Intensity Distribution Curve

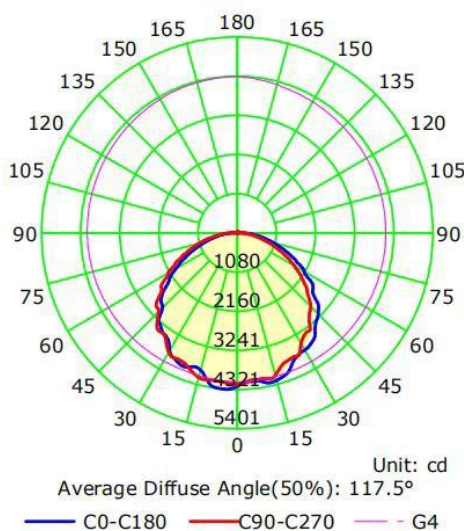

The Average Illuminance Effective Figure

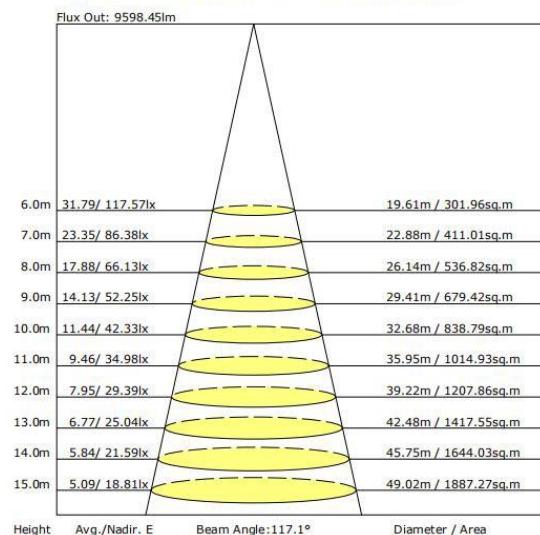

NOTICE FOR USER

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, please make sure the wiring section is insulated.
- No-professionals must not install and disassemble the lamps.

TROUBLE SHOOTINGS

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.