

TRCW-D89MEG0 Waveguide-Coax Adapter, 18 - 40 GHz

Features:


- Immediate Ship
- Return Loss: 15 dB min
- Broadband

Electrical Specifications:


- Frequency: 18 - 40 GHz
- Insertion Loss: 0.3 dB
- Return Loss: 15 dB min

Mechanical Specifications:


- Waveguide: WR-180, UG-1587
- Coax: 2.92 mm (M)
- Size: 1.3" (L) x 0.88 sq.
- Material: Aluminum
- Finish: Chromate

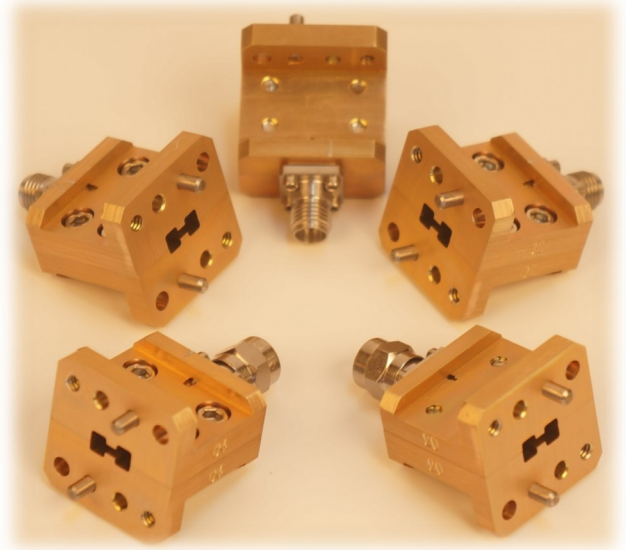

Outline: TRCW004-OL00 RevA

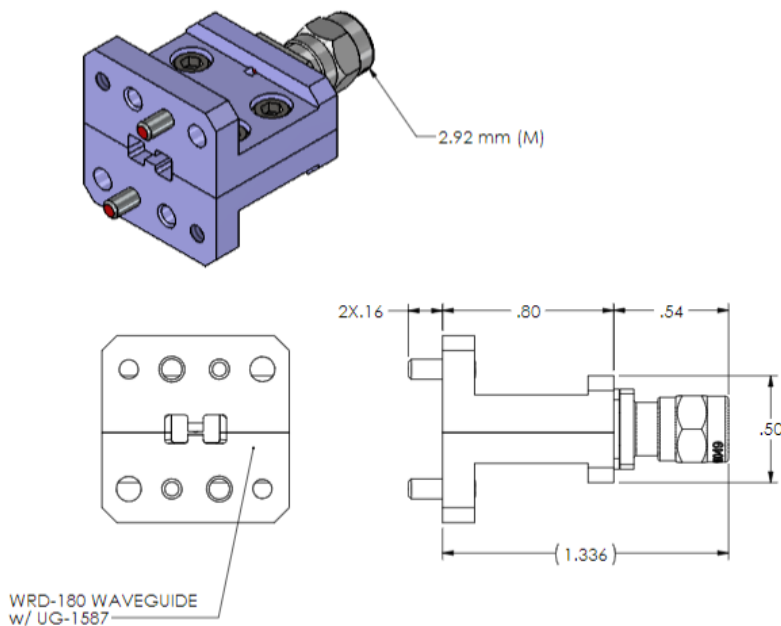

MODEL #: TRCW-D89MEG0 (A)

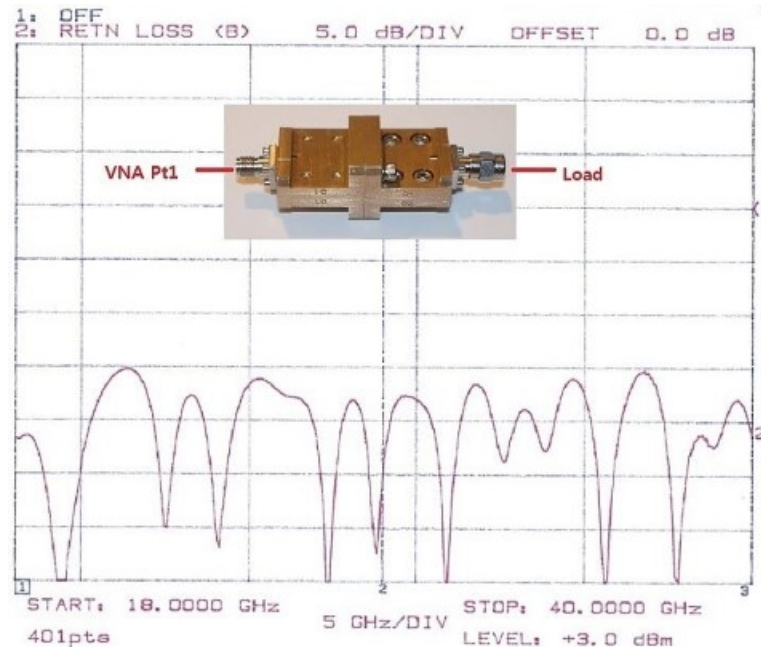

Measured return loss. 15 dB min. over 18.0 - 40.0 GHz in back-to-back configuration

Note: Raytech Inc. reserves the right to change the information presented without notice.