


ROTOMATIC RM-202AA

Automatically strips the end of armored flexible cable!

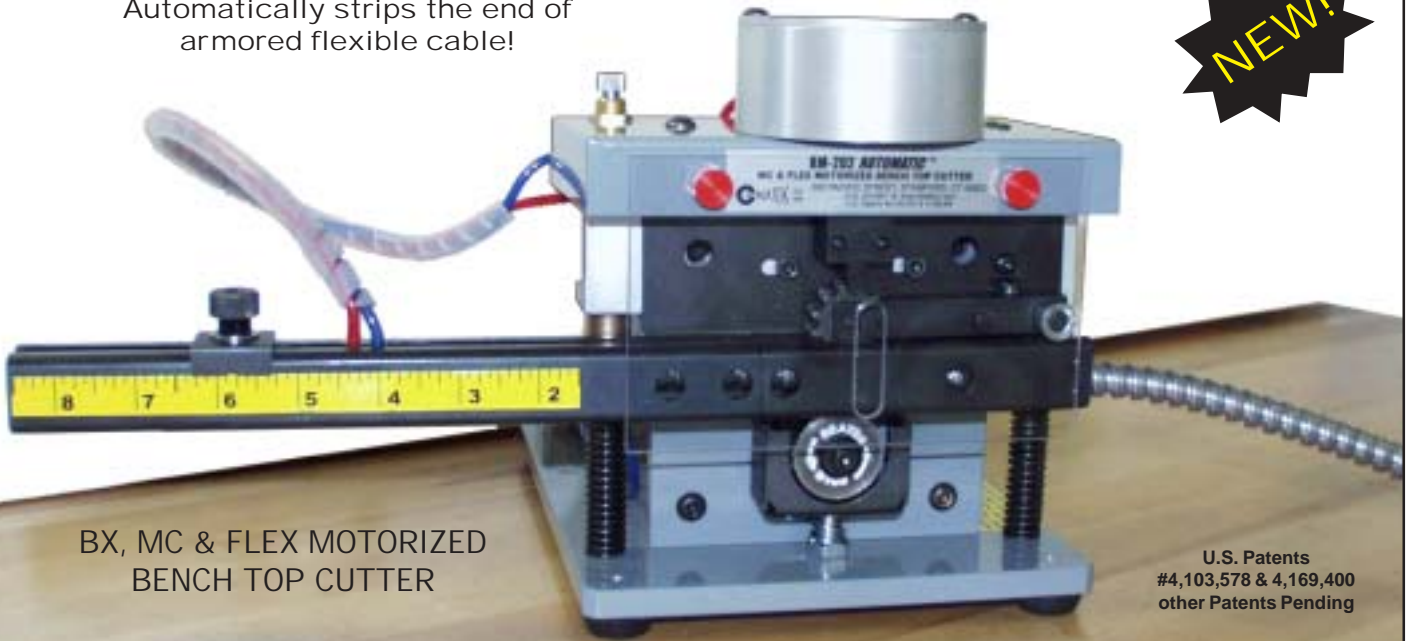

BX, MC & FLEX MOTORIZED BENCH TOP CUTTER

U.S. Patents #4,103,578 & 4,169,400 other Patents Pending

The heavy-duty ROTOMATICS are the culmination of years of experience in armored cable cutting technology and are used in the production lines of all major armored cable manufacturers

CUT COST ! INCREASE OUTPUT !

The ROTOMATIC RM-202AA with automatic cable cutting drastically cuts labor time insuring clean, fast stripping without damaging the wire inside the cable. Never use a hacksaw again! Simply set the length to be stripped, insert the cable until it trips the cable length sensor. The Rotomatic will then automatically make the cut, sending the clamping pin down. A specially designed gear then centers and aligns the cable, which in turn drives the cable over the motorized cutting wheel, splitting the armor casing. To remove the armor just untwist the cable and the casing slips off! An adjustable limit stop permits varying the depth of cut for different cables. The RM-202AA uses a large air cylinder to provide smooth and fast cutting action.

- Automatic cable cutting lets the operator repeat the same length every time, dramatically speeding up operations
- Ideal for making "Whips" & stripping MC/BX cable in precut lengths
- Great for contractors doing on site finishing work
- Eliminates deburring and nicking of wires
- Equipped with a top quality gear-motor for extra-long life.
- Clamping assembly is adjustable which allows the RM-202AA to cut different cable pitches and sizes.
- Other features include fast circular cutter replacement & a safety shield

LIMITED WARRANTY: The Rotomatic 202AA is warranted to be free from defects in workmanship and material for 90 days from date of original purchase.

All brands & product names are trademarks or registered trademarks of their respective companies

ROTOMATIC CABLE RANGES	Model	Flex Range	Standard Pin	Optional	AWG Range	O.D. Range
	RM-202A	3/8" TO 1/2"	3/8" LP-269	1/2" SP-233	#14-2 TO #4-4	0.42" TO 0.92"
	RM-202AA	3/8"	-----	-----	#14-2 TO #8-4	0.42" TO 0.60"
	RM-202M	3/8" TO 1/2"	3/8" & 1/2" LP-269	-----	#14-2 TO #4-4	0.42" TO 0.92"
	RM-202B	3/8 TO 3/4"	3/4" SP-218	3/8" LP-269 1/2" SP-233	#14-2 TO #2-4	0.42" TO 1.10"
	RM-202C	3/4" TO 1-1/4"	1-1/4" SP-233	3/4" TO 1" SP-282	#4-4 TO #1-3	1.00" TO 1.70"

PROMOTE SAFETY !

The front of the ROTOMATIC is protected by an unbreakable Lexan® shield. To insure safe operation the adjustable blade guard is integral to the cutting action and depth of cut setting on the RM-202AA. The clean cut parallel to the cable axis eliminates deburring of flexible conduit ends. This feature prevents damage to the wire's insulation caused by sloppy manual deburring. For best results we recommend the use of screw clamping and squeeze type connectors. (Check your local electrical code)

DUE TO THE INCREASE IN PRODUCTIVITY THE ROTOMATIC PAYS FOR ITSELF MANY TIMES OVER IN A SHORT TIME



	B-108	FOR ALL POWER TOOLS & MACHINES. RS-101-AP, PC-205A, RM-202A, B, C, & M
	LS-105	LUBRICANT STICK FOR BLADES ON ROTOSPLIT & ALL ROTOMATIC MODELS.

- RM-202AA requires 40 psi air pressure. Each machine includes a pressure regulator and air gauge.
- 8"H x 7"W X 11"D (Guide extends 7") 22 lbs. 115 VAC.
- Accessories: B-108 Replacement Blades; LS-105 Dry Lubricant Stick
- Other models are available, see www.SeatekCo.com or call for details



A SMALL COMPANY WITH BIG IDEAS®

392 PACIFIC STREET, STAMFORD, CT 06902

PHONE: (203) 324-0067 P FAX: (203) 324-7844 P www.SeatekCo.com

