

ESTATE TYPE
SEE DETAIL THIS SHEET

RESIDENTIAL PAVEMENT SECTION
SEE DETAIL THIS SHEET

CURB, GUTTER AND SIDEWALK PERMITTED ONLY WHEN PROJECT IS PART OF FEDERAL, STATE, COUNTY OR LOCAL PROJECT OR CURB AND GUTTER REQUIRED BY GRADING AND DRAINAGE PLAN AND SIDEWALKS

TYPICAL URBAN RESIDENTIAL STREET
N.T.S.

GENERAL NOTES:

1. CROWN STREET SHALL BE AS FOLLOWS:
a. 32' STREET = 4"
b. 40' STREET = 5"
2. ALL SUBGRADE COMPACTION FOR C & G WILL EXTEND 12" MIN. ON EITHER SIDE OF A & G OR CB SECTION.
3. SUBGRADE PREPARATION UNDER SIDEWALK AND DRIVEPADS SHALL BE INCLUDED WITH THE PARTICULAR ITEM.


CONSTRUCTION NOTES

- A. ESTATE CURB
- B. AC OR PCC PAVEMENT
- C. BASE COURSE
- D. COMPACTED SUBGRADE

ROW STREET WIDTH	MINIMUM PAVEMENT WIDTH	CROWN
40'	24'	5"


STREET CROWN DATA

VILLAGE OF LOS RANCHOS
De ALBUQUERQUE

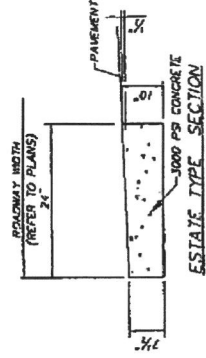

GENERAL NOTES:


1. ANY DEVIATIONS FROM THESE STANDARDS SHALL BE SUBMITTED TO THE VILLAGE ENGINEER FOR PRIOR APPROVAL
2. ALL WORK IN PUBLIC RIGHT-OF-WAY SHALL BE CONSTRUCTED BY A LICENSED CONTRACTOR AND REQUIRES PERMIT AND APPROVAL BY THE VILLAGE
3. FOR SUBGRADE 'R' VALUE LESS THAN SO A PROJECT/ SITE SPECIFIC PAYMENT DESIGN APPROVED BY THE VILLAGE ENGINEER IS REQUIRED. DESIGNS SUBMITTED MUST CONFORM TO THE AASHTO GUIDE FOR DESIGN OF PAVEMENT STRUCTURES PROCEDURE 1983 NOMOGRAPHS MAY NOT BE USED.

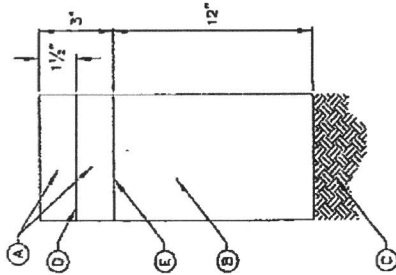

KEYED NOTES:

- A. ASPHALT CONCRETE TYPE C, PLACED IN LIFTS AS SHOWN.
- B. SUBGRADE PREPARATION, 95% MIN. COMPACTION PER ASTM D 1557.
- C. COMPACTED FILL OR UNDISTURBED EARTH 90% MIN. COMPACTION PER ASTM D 1157.
- D. TACK COAT, AS REQUIRED BY THE ENGINEER.
- E. PRIME COAT, AS REQUIRED BY THE ENGINEER, OR SUBGRADE SHALL BE MOISTURE CONTROLLED AT COMPACTION MOISTURE RANGE.

Attachment § 9.2.25(E)(4)(h)(3)(b)

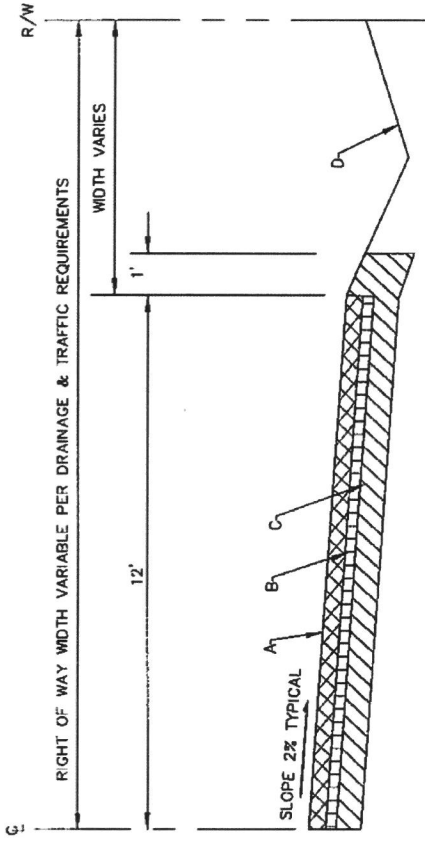


GENERAL NOTES:

1. STREET SECTION TO BE USED ONLY WHEN PERMITTED IN THE APPROVED DRAINAGE PLAN
2. RIGHT-OF-WAY REQUIREMENTS TO BE ESTABLISHED
3. DRAINAGE REQUIREMENTS AND OTHER APPURTENANCE LOCATION SHALL BE APPROVED ON AN INDIVIDUAL SITE BASIS, AND SHALL BE SHOWN ON THE PROJECT CONSTRUCTION PLAN
4. ANY VARIATIONS OR DEVIATIONS AND ALL DESIGN COMPONENTS SHALL BE APPROVED BY THE VILLAGE

CONSTRUCTION NOTES

- A. COMPACTED BASE COURSE
- B. 2" CRUSHED ROCK AS REQUIRED
- C. COMPACTED SUBGRADE
- D. PROJECT DESIGN SWALE (6:1 OR AS REQUIRED BY DESIGN) & APPROVED ENERGY DISSIPATORS AS REQUIRED BY DRAINAGE DESIGN

**TYPICAL SECTION FOR
A GRAVELLED PRIVATE WAY
N.T.S.**

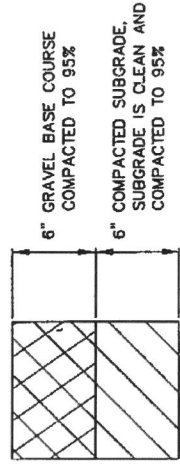

**ATTACHMENT 2
GRAVELLED PAVEMENT
SECTION**

1/2 PAVEMENT WIDTH	CROWN
12'	6"

STREET CROWN DATA

VILLAGE OF LOS RANCHOS
De ALBUQUERQUE

Attachment § 9.2.25(E)(4)(h)(3)(d)