



# CONSTRUCTION TESTING & ENGINEERING, INC.

P.O. BOX 271125, SALT LAKE CITY, UTAH 84127-1125  
(801) 972-4001 • Construction.Testing@gmail.com

## SOILS TEST REPORT


CLIENT: Lakeview Rock Products  
PROJECT: QC Testing, North Pit  
RE: 1" Gravel  
SPECIFICATION REQUIREMENTS: See target below

DATE: January 25, 2021, Mon.  
FILE #: 125 / WO #: 4274

### SIEVE ANALYSIS RESULTS ASTM C 136

Sieve Size	Sieve Opening in mm	Individual % Retained	Accumulated % Retained	**RESULTS** % Passing	Ideal /Tolerance Gradation % Passing
1"	25.0	0	0	100	100
3/4"	19.0	15.6	15.6	84.4	NA
1/2"	12.5	52.6	68.2	31.8	"
3/8"	9.5	21.4	89.6	10.4	"
#4	4.75	8.2	97.8	2.2	"

Test sample dry weight: 5637 grams (split sample)

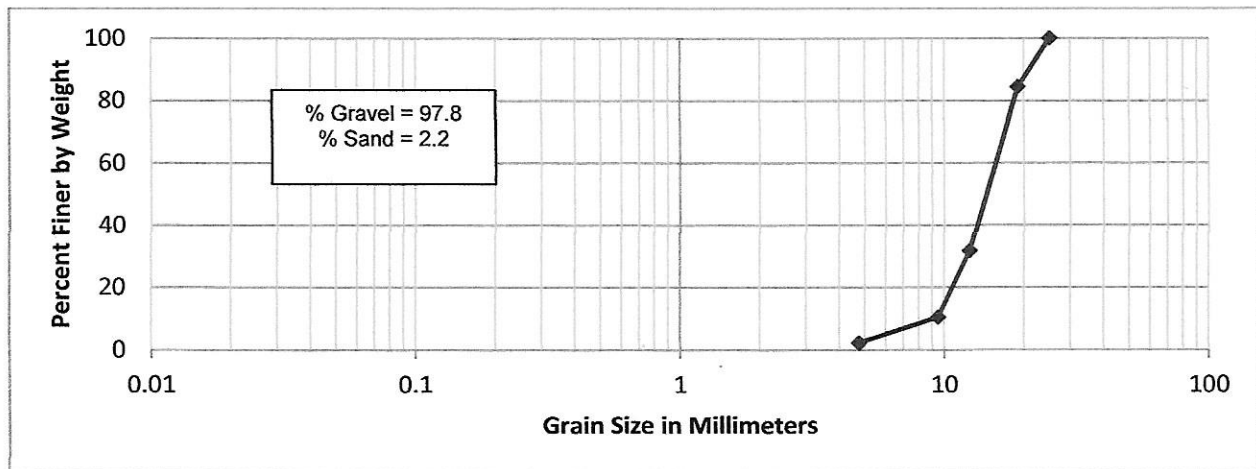

#### REMARKS:

Source of material: North Pit stockpile  
Moisture content as received: 1.4%  
Gravel physical appearance/shape: Angular

CONSTRUCTION TESTING & ENGINEERING, INC.  
CERTIFIED TEST REPORT:

David K. Megeath, Manager