

## Technical Details

- Dimensions: 266.7 x 124.9 x 25mm
- Ports: G1/4"

## Box Contents

- 1 x GTX770 Waterblock
- 5 x G1/4 Plugs
- 5 x Thermal pads 1mm
- 2 x Thermal pads 0.5mm
- 1 x Thermal paste
- 12 x M3x6 screws
- 12 x Red washer
- 1 x M3 nut
- 1 x Twin 3mm blue led

*G1/4" fittings sold separately*

**Note:** This waterblock is only suitable for reference design GTX 770 cards. If you are unsure if your card is a reference design 770 contact us prior to installation to make sure.



1. The waterblock is designed for SLI setups, so you can fit the G1/4" fittings to multiple sides of the block. Decide which configuration is best for your system.




2. Use the G1/4" blanking plugs to block the unused ports.



3. Attach your chosen fittings to the G1/4" ports. Make sure to attach one of the left and one on the right side. Flow direction is not important.




4. The block is now ready to be connected to the other watercooling components for leak testing.

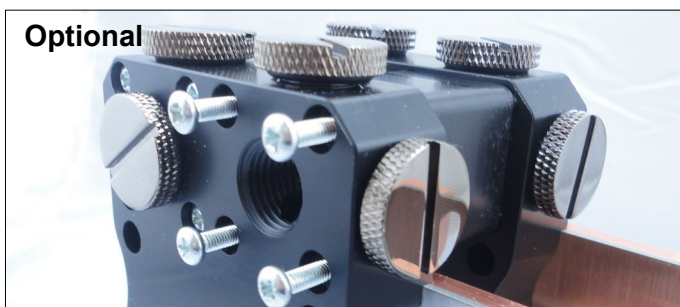


If you are using cards in SLI you can use the optional SLI flow connector to bridge the two cards. This should be done after step 12.

## NEXT PAGE →


*In the next steps the waterblock is shown without tubing or other watercooling components connected. This has been done to make it easier to see the installation process.*

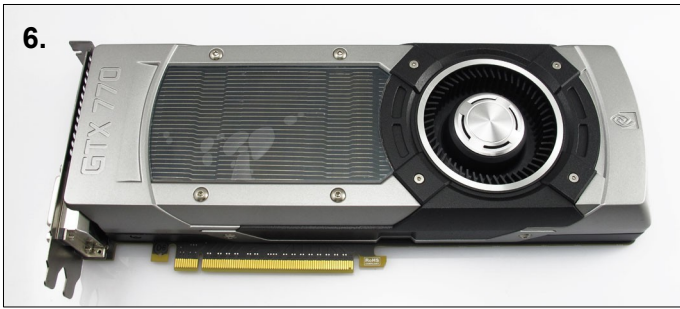


**6.** Before handing the card you should take precautions to avoid static damage. Remove the Titan card from the box ready for installation.

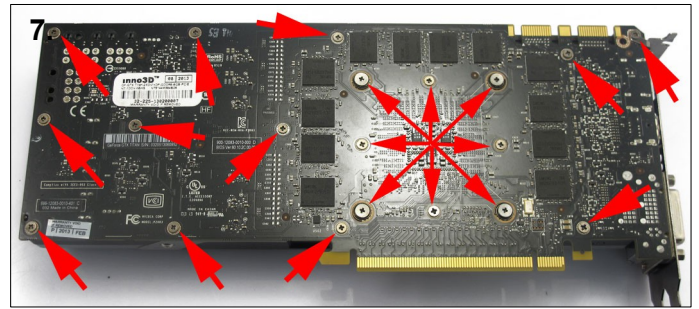


**7.** Now turn the card on its back and remove the 20 screws highlighted above.

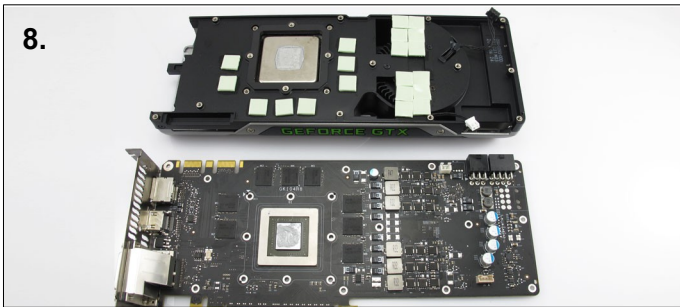


**8.** Turn the card back over and carefully remove the heatsink and fan. Now the card and heatsink are separated detach the fan power cable from the fan header.

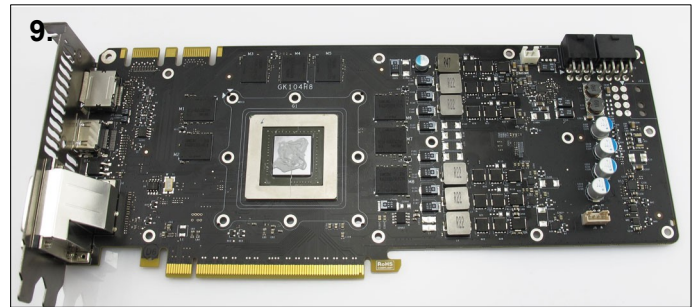

**9.** Clean the thermal paste from the GPU core and remove any residue left from the thermal pads.

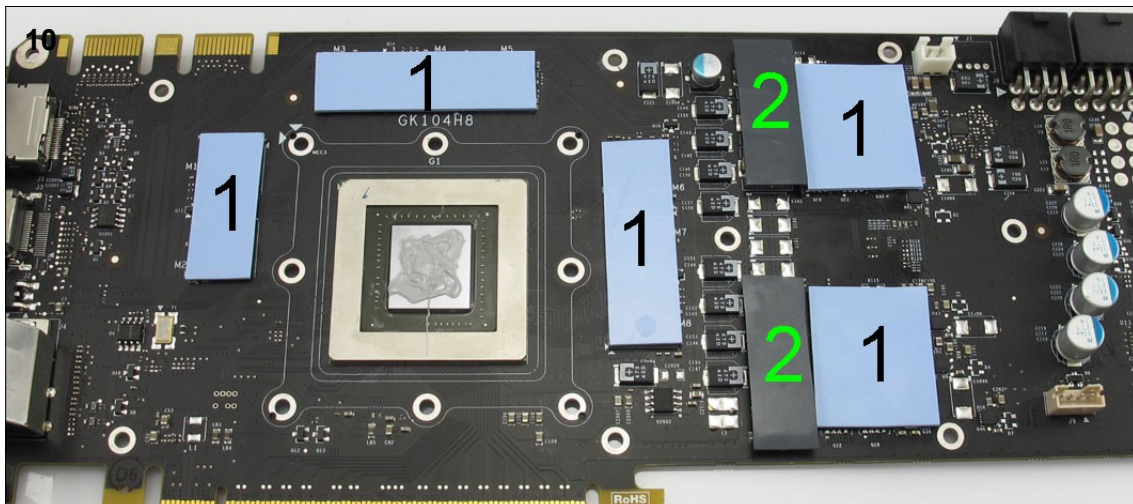

**10.** Remove the tape from both sides of the thermal pads. Place the blue pads on the positions marked 1 and the grey pads on positions marked 2. Next apply thermal paste to the GPU core.

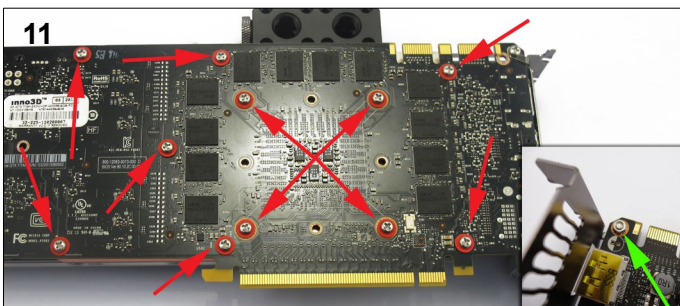

**11.** Place the waterblock on the card to line up the screw holes and then filp it over, making sure the thermal pads stay in place. Now carefully attach the block to the card, starting with the four holes behind the GPU. The screw marked in green requires an M3 nut attaching on the other side of the card.



**12.** Do not over tighten the screws as this may bend the card and cause permanent damage. The card is now ready for use. When you first boot it is advisable to use software to check the core temperature. If the temperature is high you will need to remount the block.