


# Lifting Beams



## Model 20H - Low Headroom Multiple Spread Lifting Beam

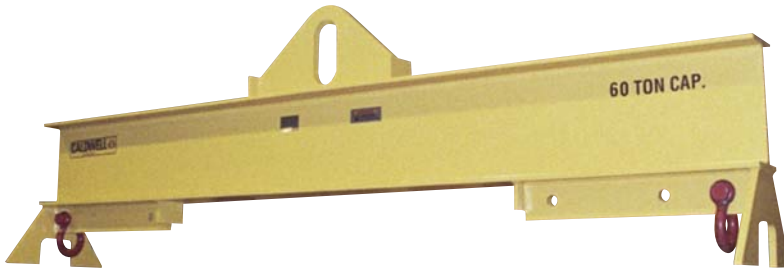

Shown with optional Built-In Stand and different hole placement.


### PRODUCT FEATURES:

- 'I' beam construction.
- Three spreads to adjust to the load
  - Outside spread
  - Middle spread (outside less 1')
  - Inside spread (outside less 2')
- Swivel hooks with hook latches standard.
- Wide range of sizes and capacities available.
- Complies with ASME standards.

### SPECIFICATIONS

Capacity (tons)	Model Number Headroom (in.) Weight (lbs.)	Outside Spread (feet)									Other Dimensions (in.)								
		8	10	12	14	16	18	20	24	30									
1	Model Number HR Headroom Weight										20H-1-30 27.5 1500	A=7/8 T=3/4 B=3 O=7/8 C=5							
2	Model Number HR Headroom Weight	See page A.8 and A.9 for these capacities and sizes.									20H-2-30 27.5 1600	A=7/8 T=3/4 B=3 O=7/8 C=5							
3	Model Number HR Headroom Weight	See page A.8 and A.9 for these capacities and sizes.									20H-3-30 29.5 1900	A=1-1/4 T=1 B=3 O=1 C=5							
5	Model Number HR Headroom Weight	See page A.8 and A.9 for these capacities and sizes.									20H-5-30 31.75 2310	A=2 T=1-1/4 B=4 O=1-15/16 C=7							
7-1/2	Model Number HR Headroom Weight	See page A.8 and A.9 for these capacities and sizes.									20H-7 1/2-20 34.75 1325	20H-7 1/2-24 34.75 1890	20H-7 1/2-30 35 2790	A=2 T=1-1/4 B=4 O=1-1/2 C=7					
10	Model Number HR Headroom Weight	See page A.8 and A.9 for these capacities and sizes.									20H-10-20 35.75 1465	20H-10-24 36 2075	20H-10-30 37.75 3150	A=2 T=1-1/4 B=4 O=1-9/16 C=7					
15	Model Number HR Headroom Weight	See page A.8 and A.9 for these capacities and sizes.									20H-15-16 41.5 1361	20H-15-18 41.75 1610	20H-15-20 42 1915	20H-15-24 43.5 2690	20H-15-30 42.25 4255	A=2-1/2 T=1-1/2 B=5 O=2-1/16 C=9			
20	Model Number HR Headroom Weight	See page A.8 and A.9 for these capacities and sizes.									20H-20-14 45.75 1210	20H-20-16 46 1510	20H-20-18 46.25 1885	20H-20-20 48 2225	20H-20-24 48.5 3155	20H-20-30 49.25 5040	A=2-1/2 T=1-1/2 B=5 O=2-1/4 C=9		
25	Model Number HR Headroom Weight	See page A.8 and A.9 for these capacities and sizes.									20H-25-14 54.75 1540	20H-25-16 55 1900	20H-25-18 56.75 2230	20H-25-20 59.75 2725	20H-25-24 60 3685	20H-25-30 60.75 5530	A=3 T=1-3/4 B=6 O=2-1/4 C=12		
30	Model Number HR Headroom Weight	See page A.8 and A.9 for these capacities and sizes.									20H-30-10 54.5 1150	20H-30-12 56.5 1395	20H-30-14 56.5 1695	20H-30-16 56.75 2050	20H-30-18 62.25 2380	20H-30-20 62.5 2850	20H-30-24 63 4040	20H-30-30 68.75 5725	A=3-1/2 T=2 B=7 O=2-1/4 C=16
40	Model Number HR Headroom Weight	20H-40-8 65.75 1200	20H-40-10 66.25 1550	20H-40-12 66.25 1840	20H-40-14 66.25 2220	20H-40-16 68.75 2400	20H-40-18 69.25 3100	20H-40-20 72 3680	20H-40-24 75.25 4920	20H-40-30 78.5 6810	A=3-1/2 T=2-1/2 B=7 O=3 C=16								

Other sizes available, consult factory.



### OPTION A

#### Extra Holes or Different Placement of Holes

Allows multiple hook positioning beyond standard 3 spreads. Specify number and spread(s) required.

### OPTION B

#### Extra Shackles and Swivel Hooks

Allows for multiple pick points or eliminates the need to move hardware for different size loads.

### OPTION C

#### Built In stand

Keeps beam upright for easy crane hook attachment (pictured above).