

Lifting Beams



The Caldwell Group • 800-628-4263 • www.caldwellinc.com


Model 22 - Heavy Duty Twin Basket Sling Lifting Beam



QUICKSHIP PROGRAM

PRODUCT FEATURES:

- Designed to be used with slings in a basket hitch.
- Specially designed hooks with hook latches minimize potential sling damage.
- Two sets of fixed hooks are standard in all lengths over 4'.
- The inner set of hooks (S2) are 1/2 the overall spread.
- Extra spreads available upon request.
- Complies with ASME standards.

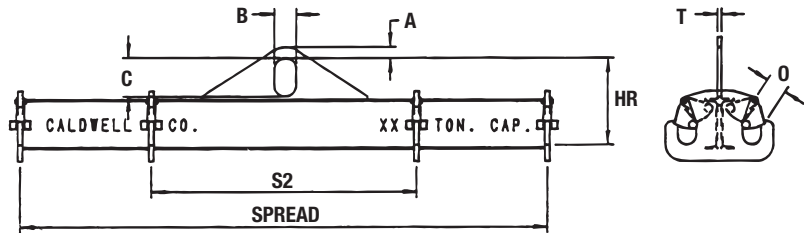

SPECIFICATIONS

| Capacity (tons) | Model Number | HR Headroom (in.) | Weight (lbs.) | Spread (feet) | | | | | | | | | | Other Dimensions (in.) | |
|-----------------|---------------------|-------------------|-------------------|-------------------|-------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|------------------------|----------|
| | | | | 3 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | | |
| 1/2 | Model Number | 22-1/2-3 | 22-1/2-4 | 22-1/2-6 | 22-1/2-8 | 22-1/2-10 | 22-1/2-12 | 22-1/2-14 | 22-1/2-16 | 22-1/2-18 | 22-1/2-20 | 22-1/2-24 | 22-1/2-30 | A=7/8 | T=3/4 |
| | HR Headroom | 8-1/2 | 8-1/2 | 8-1/2 | 8-1/2 | 9-1/2 | 9-1/2 | 10-1/2 | 10-1/2 | 11-1/2 | 11-1/2 | 12-1/2 | 13-1/2 | B=3 | O=1-1/16 |
| | Weight | 50 | 65 | 110 | 150 | 200 | 220 | 298 | 331 | 424 | 463 | 627 | 855 | C=5 | |
| 1 | Model Number | 22-1-3 | 22-1-4 | 22-1-6 | 22-1-8 | 22-1-10 | 22-1-12 | 22-1-14 | 22-1-16 | 22-1-18 | 22-1-20 | 22-1-24 | 22-1-30 | A=7/8 | T=3/4 |
| | HR Headroom | 8-1/2 | 8-1/2 | 9-1/2 | 10-1/2 | 10-1/2 | 11-1/2 | 11-1/2 | 12-1/2 | 13-1/2 | 13-1/2 | 15-1/2 | 15-1/2 | B=3 | O=1-1/8 |
| | Weight | 50 | 65 | 145 | 210 | 230 | 290 | 338 | 390 | 539 | 588 | 907 | 1150 | C=5 | |
| 2 | Model Number | 22-2-3 | 22-2-4 | 22-2-6 | 22-2-8 | 22-2-10 | 22-2-12 | 22-2-14 | 22-2-16 | 22-2-18 | 22-2-20 | 22-2-24 | 22-2-30 | A=7/8 | T=3/4 |
| | HR Headroom | 9-1/2 | 10-1/2 | 10-1/2 | 11-1/2 | 12-1/2 | 13-1/2 | 13-1/2 | 14-1/2 | 15-1/2 | 15-1/2 | 17-1/2 | 20-1/2 | B=3 | O=1-1/8 |
| | Weight | 70 | 90 | 160 | 225 | 300 | 375 | 447 | 515 | 725 | 815 | 1221 | 2272 | C=5 | |
| 5 | Model Number | 22-5-3 | 22-5-4 | 22-5-6 | 22-5-8 | 22-5-10 | 22-5-12 | 22-5-14* | 22-5-16* | 22-5-18* | 22-5-20* | 22-5-24* | 22-5-30* | A=2 | T=1 |
| | HR Headroom | 13-1/2 | 14-1/2 | 15-1/2 | 16-1/2 | 16-1/2 | 16-1/2 | 19 | 19-1/2 | 22-1/2 | 22-1/2 | 22-1/2 | 25-1/2 | B=4 | T=1-1/4* |
| | Weight | 90 | 160 | 275 | 350 | 450 | 500 | 854 | 940 | 1398 | 1650 | 2144 | 2330 | C=7 | O=1-1/8 |
| 7-1/2 | Model Number | 22-7 1/2-3 | 22-7 1/2-4 | 22-7 1/2-6 | 22-7 1/2-8 | 22-7 1/2-10 | 22-7 1/2-12 | 22-7 1/2-14 | 22-7 1/2-16 | 22-7 1/2-18 | 22-7 1/2-20 | 22-7 1/2-24 | 22-7 1/2-30 | A=2 | T=1-1/4 |
| | HR Headroom | 14-1/2 | 15-1/2 | 16-1/2 | 17-1/2 | 17-1/2 | 19-1/2 | 22-1/2 | 22-1/2 | 22-1/2 | 22-1/2 | 25-1/2 | 25-1/2 | B=4 | O=1-3/4 |
| | Weight | 155 | 180 | 330 | 410 | 500 | 700 | 1162 | 1300 | 1468 | 1606 | 2354 | 2877 | C=7 | |
| 10 | Model Number | 22-10-3 | 22-10-4 | 22-10-6 | 22-10-8 | 22-10-10 | 22-10-12 | 22-10-14 | 22-10-16 | 22-10-18 | 22-10-20 | 22-10-24 | 22-10-30 | A=2 | T=1-1/4 |
| | HR Headroom | 15-1/2 | 16-1/2 | 17-1/2 | 19-1/2 | 22-1/2 | 19-1/2 | 22-1/2 | 22-1/2 | 25-1/2 | 25-1/2 | 25-1/2 | 25-1/2 | B=4 | O=1-3/4 |
| | Weight | 150 | 200 | 320 | 500 | 850 | 1000 | 1147 | 1299 | 1741 | 1943 | 2335 | 2962 | C=7 | |
| 15 | Model Number | 22-15-3 | 22-15-4 | 22-15-6 | 22-15-8 | 22-15-10 | 22-15-12 | 22-15-14 | 22-15-16 | 22-15-18 | 22-15-20 | 22-15-24 | 22-15-30 | A=2-1/2 | T=1-1/2 |
| | HR Headroom | 18-1/2 | 19-1/2 | 21-1/2 | 21-1/2 | 24-1/2 | 27-1/2 | 27-1/2 | 27-1/2 | 27-1/2 | 27-1/2 | 27-1/2 | 30 | B=5 | O=4 |
| | Weight | 397 | 471 | 970 | 1240 | 1256 | 1980 | 2065 | 2100 | 2391 | 2584 | 4045 | 4100 | C=9 | |
| 20 | Model Number | 22-20-3 | 22-20-4 | 22-20-6 | 22-20-8 | 22-20-10 | 22-20-12 | 22-20-14 | 22-20-16 | 22-20-18 | 22-20-20 | 22-20-24 | 22-20-30 | A=2-1/2 | T=1-1/2 |
| | HR Headroom | 19-1/2 | 21-1/2 | 21-1/2 | 24-1/2 | 24-1/2 | 24-1/2 | 27-1/2 | 27-1/2 | 27-1/2 | 27-1/2 | 31 | 31 | B=5 | O=4 |
| | Weight | 253 | 328 | 910 | 1000 | 1150 | 1740 | 1935 | 2210 | 2480 | 2755 | 3500 | 4500 | C=9 | |

Model 22G - custom designed lifter with segmented sling saddle on the top of the beam can further reduce beam headroom and increased sling spread adjustment.

