




The Metro Mark (MM) Series provides directional type information on installations where older style poles or lighter duty poles are already in place.

These poles, even though not designed for long mast arms, can support the Metro Mark Series with the use of mid-pole mounting brackets.

- *All aluminum construction*
- *Single or double face*
- *Minimum maintenance*
- *Vandal resistant*
- *UL Listed- suitable for outdoor use (optional)*

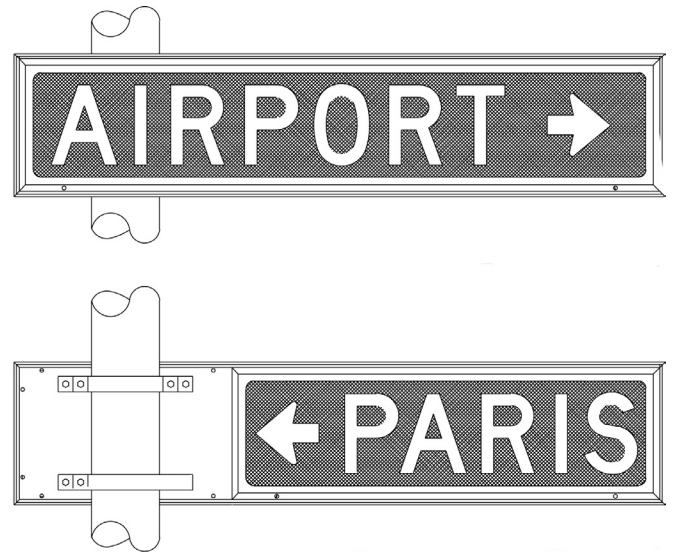

Specifications

Main Body

Extruded aluminum with .064" minimum thickness, reinforced for a rigid corrosion resistant housing. Standard finish is natural aluminum.

Legend Panels

Legend panels are .093 white translucent polycarbonate. Lens is framed including a full length extruded aluminum hinge for straight line travel and positive positioning to provide sealing.

Legend Letter Size

For single face, one lamp fixture, letter size is 6" upper case and 4 1/2" lower case with a maximum of 8 letter spaces per 4' panel and 12 letter spaces per 6' panel. For double face two lamp fixture, primary face uses 8" upper case and 6" lower case, secondary face uses 6" upper case and 4 1/2" lower case. Letter styles are series "E" through series "C".

Ballast

Ballast is a high power factor, one or two lamp 120v.

Mounting Display

Mounting bracket must be ordered separately. Standard bracket is an aluminum mid-pole mounting bracket. Bracket is designed to fit either straight round pole, tapered round pole, or octagon shaped pole. For special mounting arrangements, contact nearest representative or factory direct for quotation and availability.

Product ID Model

Lamp Length

Voltage

MM

48"; 6x49-1
72"; 6x73-1/4 Nominal

120 Standard

Lamp Type

Finish & Color

Mounting

T12
T8
LED

NA- Natural aluminum (Std.)
CC- Custom (please specify)

DM- Direct pole mount (Std.)

**Must be ordered separately*

Specifications subject to change any time without notice. Copyright 2016 National Signal, Inc. All rights reserved. Printed in the United States.