


Sawtooth

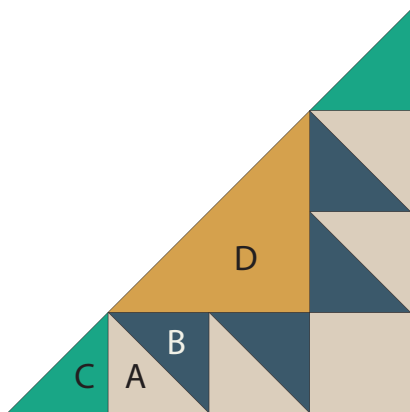

CUT

•Fabric A

- » Two 4" squares
- » One 3-1/2" square

•Fabric B

- » Two 4" squares

•Fabric C

- » One 3-7/8" square
cut in half diagonally


•Fabric D

- » One 6-7/8" square
cut in half diagonally

Read through all instructions before beginning. Remove selvages. Cut pieces exactly as listed in instructions. Sew pieces right sides together and use an accurate 1/4" seam allowance.


Half-Square Triangle Units

1. Draw a diagonal line on the wrong side of each 4" fabric A square. Place a marked square right sides together with a same-size fabric B square. Sew a 1/4" seam on each side of the drawn line. Cut apart on the line to make two Half-Square Triangle (HST) units. Trim units to 3-1/2" square. Make a total of four A/B HST units.

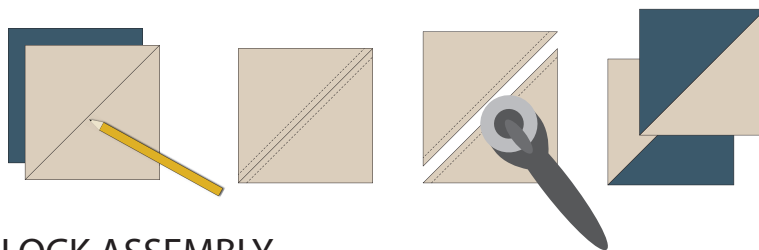

BLOCK ASSEMBLY

1. Referring to the Block Assembly Diagram on page 2 and noting placement and orientation, sew one fabric C triangle and two HST units together. Stitch to the fabric D triangle as shown.

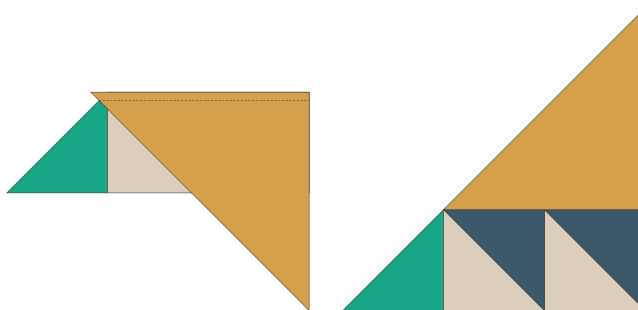



2. Sew the 3-1/2" fabric A square, two HST units, and the remaining fabric C triangle together as shown. Sew to the remaining side of the fabric D triangle to make the half block. Handle half-block carefully to keep from stretching the long bias edge.



Sawtooth Page 2



Notes

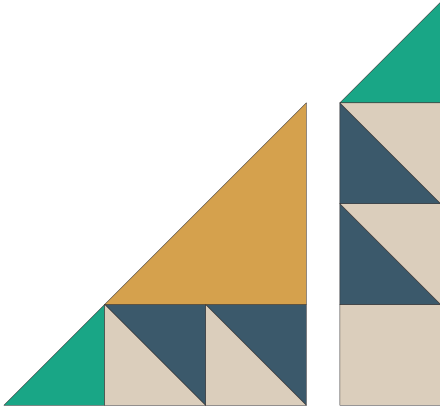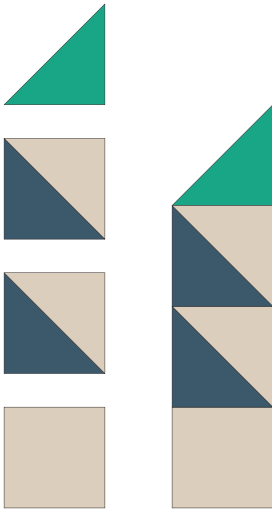

Block Assembly Diagram

COPYRIGHT

For personal use only. Reproduction or distribution of any part of this pattern in any way whatsoever without written permission is strictly prohibited. If this design is used in a quilt for display, please credit, "Sharon Holland" for the design. All rights reserved. ©2018 Sharon Holland. For pattern support: contact@sharonhollanddesigns.com