


DIRT & GAS SEPARATOR / LOW LOSS HEADER

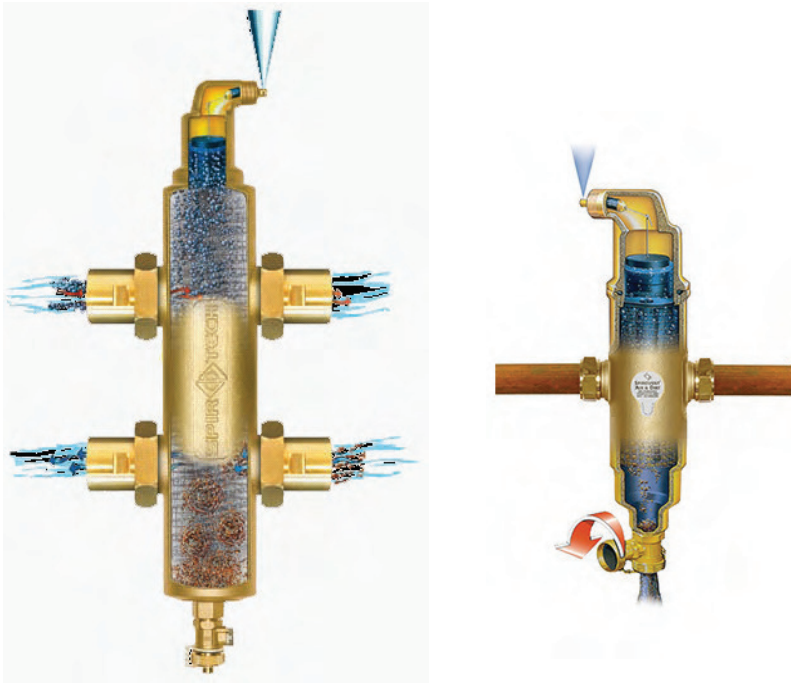

The SpiroCross range is ideal for the hydronic balance and the effective removal of gas and dirt from the system. This ensures faster system commissioning, improved performance and reduced maintenance.

Deaerator - removes circulating gas and micro bubbles

Dirt Separator – separates dirt particles from system

Low Loss Header – hydraulic balance

This inline system provides active gas and dirt separation in a highly compact design, and guarantees a perfect balance.



DEAERATOR / FILTER

- Removes circulating air and micro-bubbles
- Separates and removes tiny particles, from 5 µm (= 0.005 mm)
- Drains dirt while the installation is operating
- No shut-off valves or bypass required
- Minimal, constant pressure drop

Working pressure:	0 – 10 bar
Working temperature:	0 – 110 °C
Weight:	1.75kg
Material:	Brass
Dimensions :	257mm H x 88mm D

DEAERATOR / FILTER / LOW LOSS HEADER

- Three functions in a single component
- Removes circulating air and micro-bubbles
- Hydraulic separation within the system
- Removes dirt from the system
- No shut-off valves or by-pass required
- Minimal pressure drop
- No maintenance
- 20 year guarantee on auto air bleed

Working pressure:	0 – 10 bar
Working temperature:	0 – 110 °C
Weight:	6.5kg
Material:	Brass
Dimensions :	515mm H x 80mm D