

CLICK

TEXTILE MOULDED ACOUSTIC
WALL & CEILING TILES
WORLDWIDE STANDARDS

eomac CLICK™ is a new concept of acoustic wall and ceiling tiles. CLICK™ is manufactured by ARTOFIX through a patented process, and exclusively presented by **eomac**.

- Moulded textile files, installed using only a stapler
- Eco-friendly - Made with recycled polyester
- Extremely lightweight and easy-to-ship
- Excellent acoustic properties - NRC as high as 0.80



PRODUCT DESCRIPTION

Textile moulded acoustic wall and ceiling tiles

MODELS

WALL MODELS*: ZEN1, ZEN 2, ZEN 4, CUBE, WAVE, PULSAR

SUSPENDED CEILING MODELS**: ZEN C, WAVE C, PULSAR C, PULSAR BAFFLE

* Wall tiles are designed with integrated keys. Can also be installed to ceilings.

** Suspended ceiling tiles are designed with a flange on the outer perimeter, allowing for installation with standard ceiling grid systems.

BACKING

Backing is 100% Polyester, other contents based on selected covering fabric.

FABRIC

- Select from **eomac**'s standard ranges. Samples available upon request.
- Custom fabrics, colours and textures available.*
 *Minimum order quantities may apply.
- Customer's own fabric upon review and approval.
- Dye-sublimated, high-definition digital printing on acoustic fabric available upon review and approval of artwork/graphics.

Recommended Fabric Specifications:

Contents:	100% Recycled Polyester
Weight :	15.0 ±1.0 oz./Lin.yd
Width:	168 cm (66") usable

ACOUSTIC PERFORMANCE*

Sound Absorption Coefficients (Hz)

125	250	500	1000	2000	4000	NRC
0.33	0.36	1.06	1.11	0.78	0.83	0.80

*The test results from an independent certified laboratory were done according to the following standards: ASTM C423-09a Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method. ASTM E795 Standard Practices for Mounting Test Specimens During Sound Absorption Tests.

FLAMMABILITY

Fire test data performed by independent laboratories. Support documentation available upon request. Note that all data provided is for typical usage. **eomac** is adaptable to other situations and custom applications.



ASTM E-84: Class A
 BS EN 13501-1:2007 : Class B, s2,d2

INSTALLATION

For installation guidelines, please visit **eomac**'s online information centre at **eomac.com**


WALL MODELS

100% Polyester CLICK™ Tiles ¹	Weight ²	Dimensions	Coverage	Surface Density ²	Packaging (# Tiles / Box)
ZEN 1	0.15 kg (0.30 lb)	288 mm x 288 mm x 16 mm (11 ³ / ₈ " x 11 ³ / ₈ " x ⁵ / ₈ ")	0.083 m ² (0.9 ft ²)	1.80 kg/m ² (0.33 lb/ft ²)	60
ZEN 2	0.30 kg (0.60 lb)	288 mm x 578 mm x 16 mm (11 ³ / ₈ " x 22 ³ / ₄ " x ⁵ / ₈ ")	0.167 m ² (1.8 ft ²)	1.80 kg/m ² (0.33 lb/ft ²)	30
CUBE	0.30 kg (0.60 lb)	288 mm x 578 mm x 19 mm (11 ³ / ₈ " x 22 ³ / ₄ " x ³ / ₄ ")	0.167 m ² (1.8 ft ²)	1.80 kg/m ² (0.33 lb/ft ²)	30
ZEN 4	0.60 kg (1.39 lb)	578 mm x 578 mm x 16 mm (22 ³ / ₄ " x 22 ³ / ₄ " x ⁵ / ₈ ")	0.364 m ² (3.6 ft ²)	1.65 kg/m ² (0.39 lb/ft ²)	15
WAVE	0.60 kg (1.39 lb)	578 mm x 578 mm x 19 mm (22 ³ / ₄ " x 22 ³ / ₄ " x ³ / ₄ ")	0.364 m ² (3.6 ft ²)	1.65 kg/m ² (0.39 lb/ft ²)	15
PULSAR	0.60 kg (1.39 lb)	578 mm x 578 mm x 76 mm (22 ³ / ₄ " x 22 ³ / ₄ " x 3")	0.364 m ² (3.6 ft ²)	1.65 kg/m ² (0.39 lb/ft ²)	10


¹Backing is 100% polyester, other contents based on selected covering fabric.

²Averaged nominal values. May vary depending on covering fabric.


EXAMPLES




ZEN 1



CUBE




WAVE




PULSAR


ZEN 2 CONFIGURATIONS




Z2-01




Z2-02

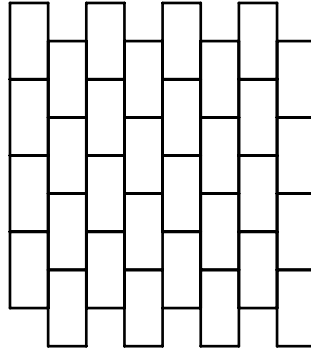


Z2-03




Z2-04

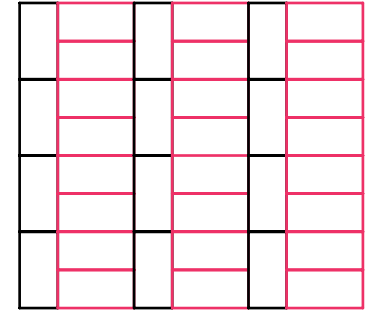


Z2-05




Z2-06

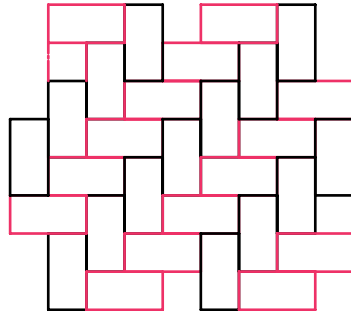


Z2-07

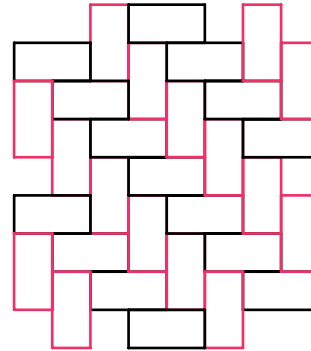


Z2-08





Z2-09




Z2-10




Z2-11




CUBE CONFIGURATIONS




CU-01




CU-02

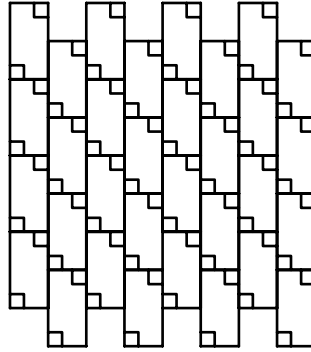


CU-03




CU-04

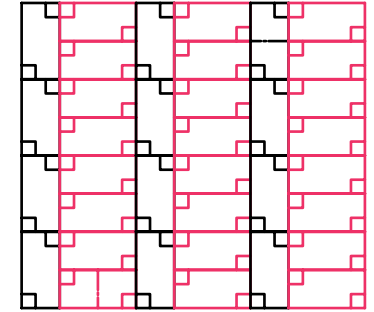


CU-05




CU-06

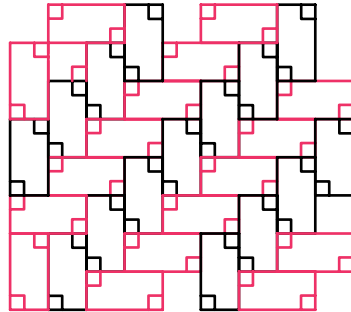


CU-07

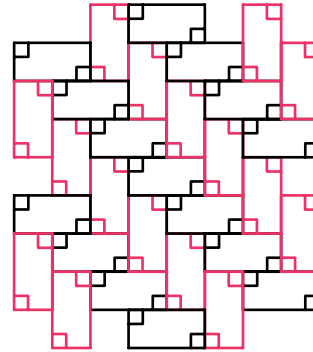


CU-08





CU-09




CU-10




CU-11




WAVE CONFIGURATIONS

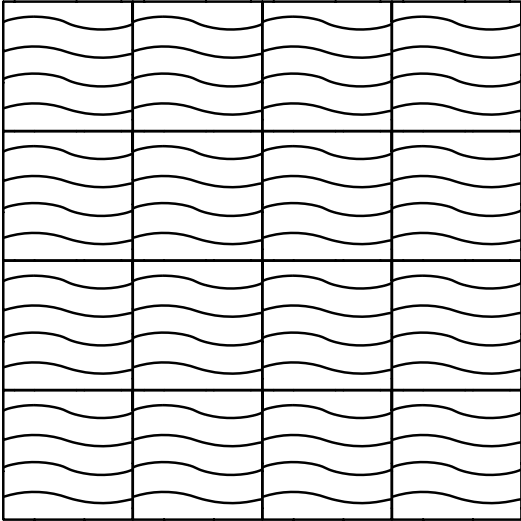

WA-01

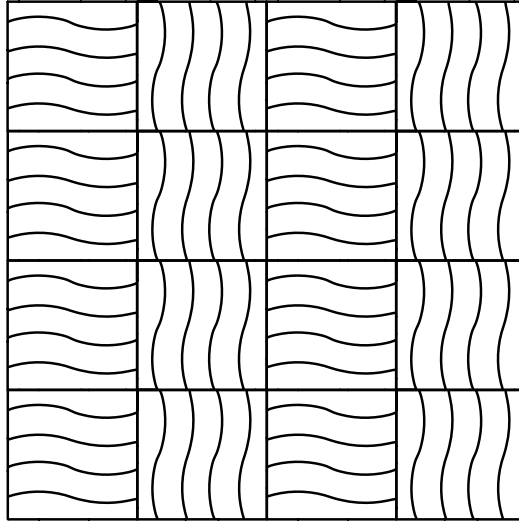


WA-02

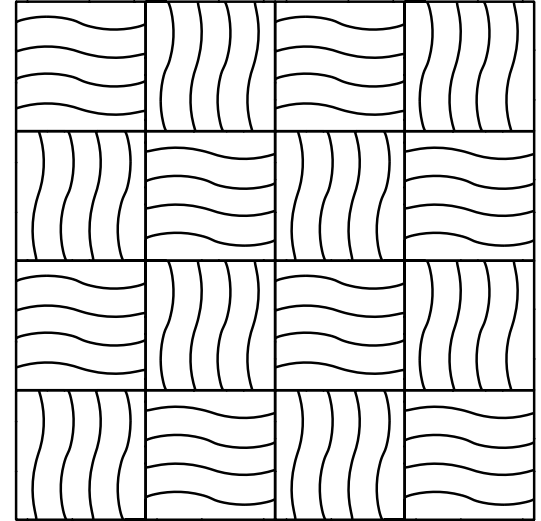


WA-03


PULSAR CONFIGURATIONS

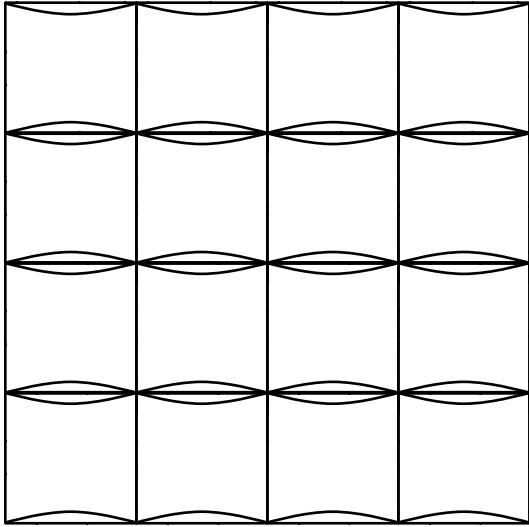

PU-01

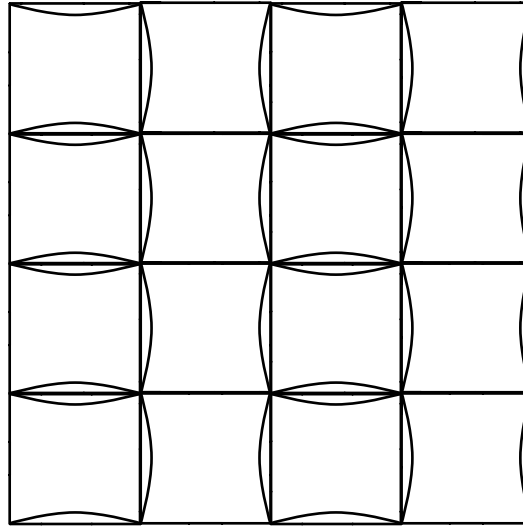

PU-02

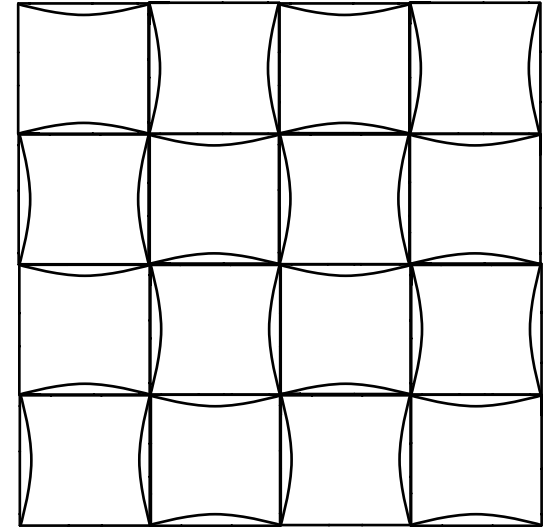

PU-03


SUSPENDED CEILING MODELS

100% Polyester CLICK™ Tiles ¹	Weight ²	Dimensions	Coverage	Surface Density ²	Packaging (# Tiles / Box)
ZEN 4 C	0.60 kg (1.39 lb)	578 mm x 578 mm x 16 mm (22 ¾" x 22 ¾" x ⅝")	0.364 m ² (3.6 ft ²)	1.65 kg/m ² (0.39 lb/ft ²)	15
WAVE C	0.60 kg (1.39 lb)	578 mm x 578 mm x 19 mm (22 ¾" x 22 ¾" x ¾")	0.364 m ² (3.6 ft ²)	1.65 kg/m ² (0.39 lb/ft ²)	15
PULSAR C	0.60 kg (1.39 lb)	578 mm x 578 mm x 76 mm (22 ¾" x 22 ¾" x 3")	0.364 m ² (3.6 ft ²)	1.65 kg/m ² (0.39 lb/ft ²)	10


¹Backing is 100% polyester, other contents based on selected covering fabric.

²Averaged nominal values. May vary depending on covering fabric.

EXAMPLE

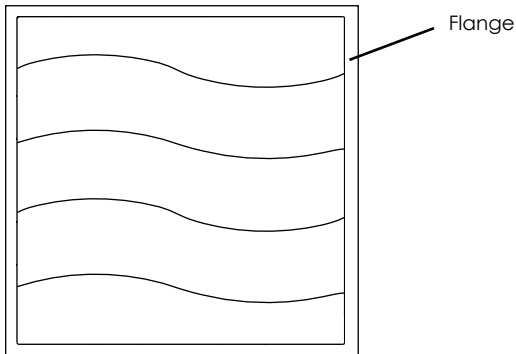

WAVE C

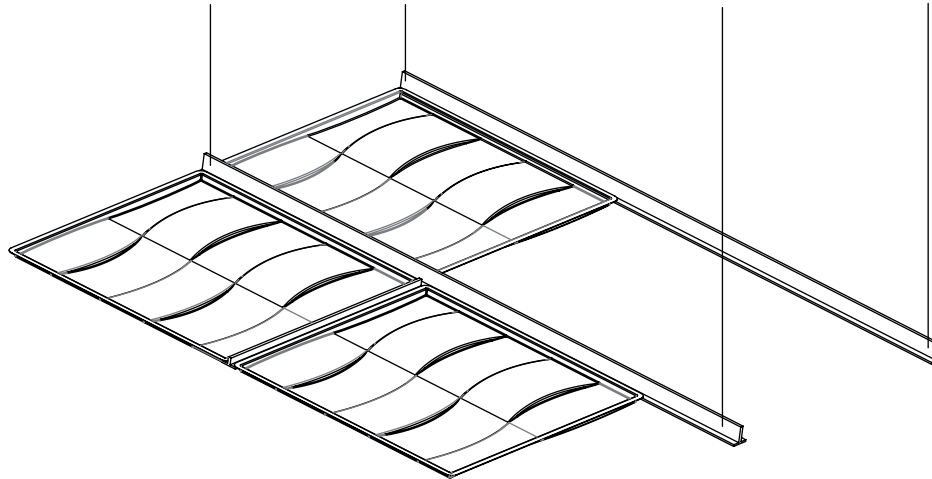


WAVE C SUSPENDED CEILING INSTALLATION

PULSAR BAFFLE

100% Polyester CLICK™ Tiles ¹	Weight ²	Dimensions ²	Tiles Per View-side
PULSAR BAFFLE II	9.1 kg (20 lb)	584 mm x 1162 mm x 152 mm (23" x 45.75" x 6")	2
PULSAR BAFFLE III	13.6 kg (30 lb)	584 mm x 1740 mm x 152 mm (23" x 68.50" x 6")	3
PULSAR BAFFLE IV	18.1 kg (40 lb)	584 mm x 2318 mm x 152 mm (23" x 91.25" x 6")	4

¹Backing is 100% polyester, other contents based on selected covering fabric.

²Averaged nominal values. May vary depending on covering fabric.

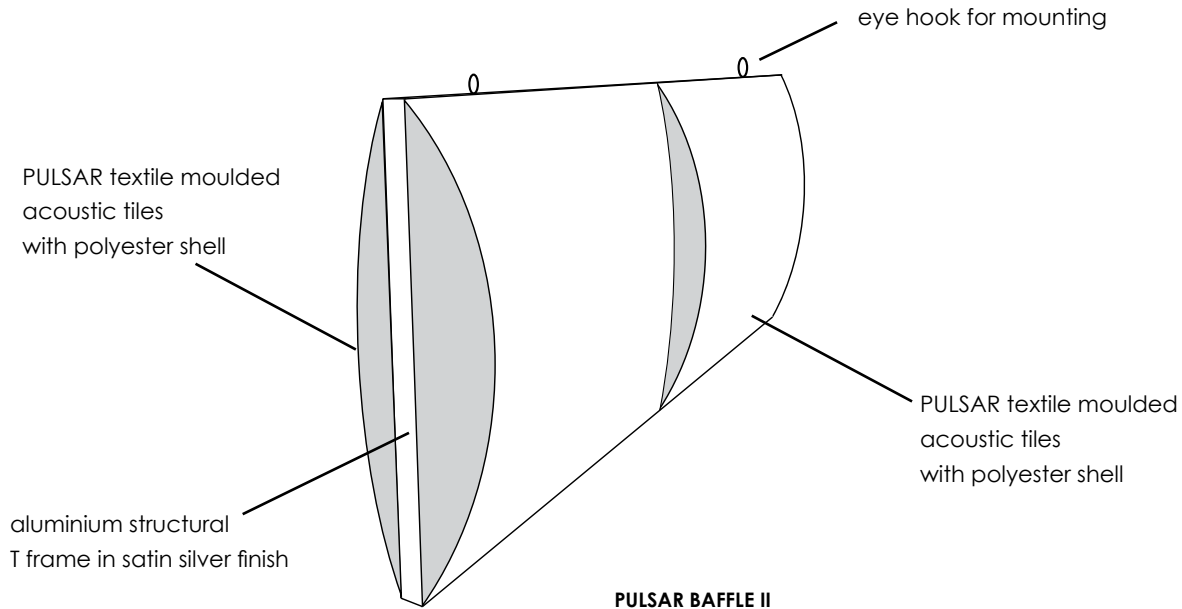

aluminium structural
T frame in satin silver finish

PULSAR textile moulded
acoustic tiles
with polyester shell

eye hook for mounting

PULSAR textile moulded
acoustic tiles
with polyester shell

PULSAR BAFFLE II

core: 152 mm (6") thick
low density polyester web
follows the profile of the tile