



jannyMT

## The 610-0 Module

### Technical Data Sheet "610-0 Module"



#### Uses and Application


- Transport and storage
- Waste, Polluting and hazardous products, Food, Electrical equipments, Art pieces, Archives...

#### Characteristics

- Patented closing system
- Quick assembly: 10 seconds
- Rigid container: 610 liters
- Stackable: up to 2,000 kg / 4410 lbs on the lid
- Possibility to store acid product
- Possibility of dry air (using humidity absorber)
- Possibility of anoxia (using oxygen absorber)
- Food grade and washable
- Lid in Acrylonitrile butadiene styrene (ABS)
- Container in Polyethylene High Density (PEHD)
- No metallic parts
- Sealing by controlled squashing

#### Data on the product


	Height	Width	Length
Internal dimension	56,5 cm	111 cm	91 cm
	22 1/4 in	43 45/64 in	35 53/64 in
External dimension	79,5 cm	121 cm	101 cm
	31 19/64 in	47 41/64 in	39 49/64 in
Internal Volume	610 L		
	21,54 ft <sup>3</sup> / 161,15 Gallons / 17,31 Bushels		
Weight	49 kg		
	108 lb		

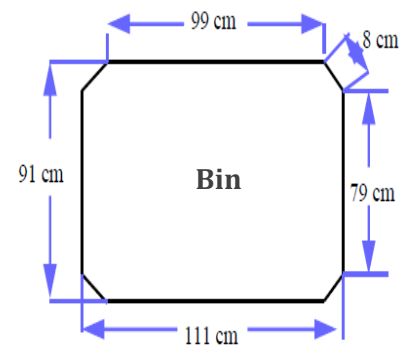

#### Precautions of uses

During the set-up, you must make sure that the lid is fixed properly onto the bin, to secure the sealing.

# JMT US LLC



JMT US LLC

California Office:  
PO BOX 657,  
Arcata, CA 95518  
Tel: 707-496-0937

Michigan Office:  
246 East Saginaw Street,  
East Lansing, MI 48823  
Tel: 517-215-5970  
info@jmt-us.com  
www.jmt-us.com