

WAVE STRIP LIGHT



DESCRIPTION

Brilliance Wave Strip Light is made specifically to flex left and right for indoor or outdoor applications with a radius and are perfect for fire pits, stairs, hardscaping, and overhangs. Just like our original strip light, the LEDs are encased in a UV protected material and can be incorporated to a new project or connected directly to an existing 8 to 16 VAC landscape lighting system. Dimmable with Brilliance Dimmer and most magnetic transformers. Reference our product and installation guide for assembly instructions and best practices.



Part Number: **BRI-WAVE-2700-65**

↓
Kelvin

FEATURES

- Recommended max. length per power feed is 22 feet
- Available in 65.62 ft reels (20 meters)
- Enhanced ESD (Electro-Static Discharge) protection (IEC-61000-4-2)
- UL Certified E487030


NEC® Article 411.5 (B): Lighting systems shall be installed not less than 3m (10ft) horizontally from the nearest edge of the water, unless permitted by Article 680.

WAVE STRIP LIGHT SPECS

Wattage	4.5W per meter
Volt Amps	2.5 per ft
Lumens	30 per ft
Kelvin Temperature	2700
Operating Range	8-16 VAC/DC
CRI	80
IP	65
Lamp Life (hours)	35,000
Warranty (years)	3



Best Practices Video

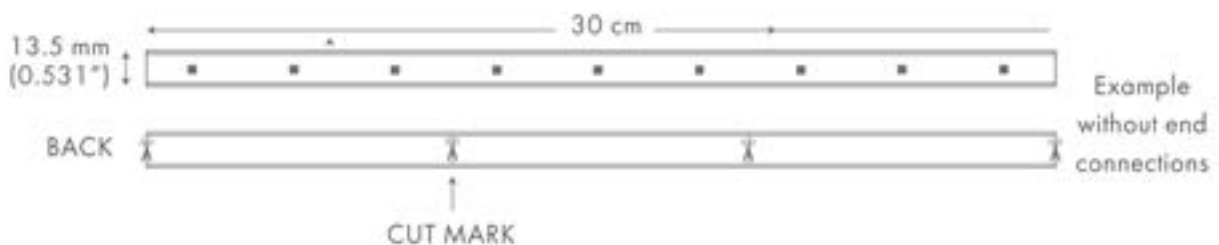

WAVE STRIP LIGHT ACCESSORIES



Power Feed Kit
Part Number: BRI-WAVE-A-PF
1 - Power Feed w/ Metal Cover
1 - Metal Anti-Slip Plate



Jumper Connector Kit
Part Number: BRI-WAVE-A-JC
1 - Jumper Connector
2 - Metal Covers
2 - Metal Anti-Slip Plates



End Cap Kit
Part Number: BRI-WAVE-A-EC
1 - End Cap
1 - Metal Anti-Slip Plate



Channel Mounting Plate
Part Number: BRI-WAVE-A-MP
1 - Mounting Plate
1 - Screw



Channel - Bendable
Part Number: BRI-WAVE-A-BC
1M (3.2') Channel sections
1 - Bendable Channel
5 - Screws



Channel - Standard
Part Number: BRI-WAVE-A-SC
1M (3.2') Channel sections
1 - Standard Channel
5 - Screws