

EF9000LBR

Less Bottom Rod



FEATURES & OPTIONS

Door Height

For all doors up to 7'0", 8'0" or 10'0" high

Door Width

For all doors up to 36" or 48" wide

Stile

5-3/8" minimum for single doors and standard 5/8" stop
4-7/8" minimum for double doors

Material

Cover: Stainless steel, zinc
Cover Tube: Aluminum
End Cap: Zinc

Dogging

No dogging on fire rated devices

Strike (Top)

Solid stainless steel

Top Latch

1/2" throw, Pullman type with automatic dead-latching,
Stainless steel

Fire Bolt

Auxiliary spring loaded latchbolt, when exposed to fire latchbolt releases keeping the door closed and regulated

Mounting

Furnished standard with wood, machine screws and thru-bolts

Backset

2-3/4" standard

Handing

Non-handed

Projection

3" maximum projection, 2-5/8" when depressed

Operation

Exit by slight pressure on any point on the push bar at all time

Electric Latch Retraction

Available with Electric Latch Retraction (ELR)

SPECIFICATIONS

Exit Device: Exit device shall be by Pamex model # **EF9000LBR** for standard exit opening. All exit devices shall be modern push pad type with vertical latching and auxiliary spring fire bolt, non-handed and provided with thru bolts for proper installation. EF9000LBR is UL listed for 3 hour fire and egress. Exit device shall be narrow profile; projecting only 3" from the surface of the door.

WARRANTY

- Life-Time mechanical warranty
- Five years finish warranty




CODE COMPLIANCE

- ANSI A156.3, Grade 1
- UL listed for Panic and UL10C, UBC 7-2-1997 codes
- UL 3 Hours Fire Rated

AVAILABLE TRIMS



E9000 Escutcheon Lever Trim E9000 Thumb Piece Handle Trim E9000 Electrified Lever Trim

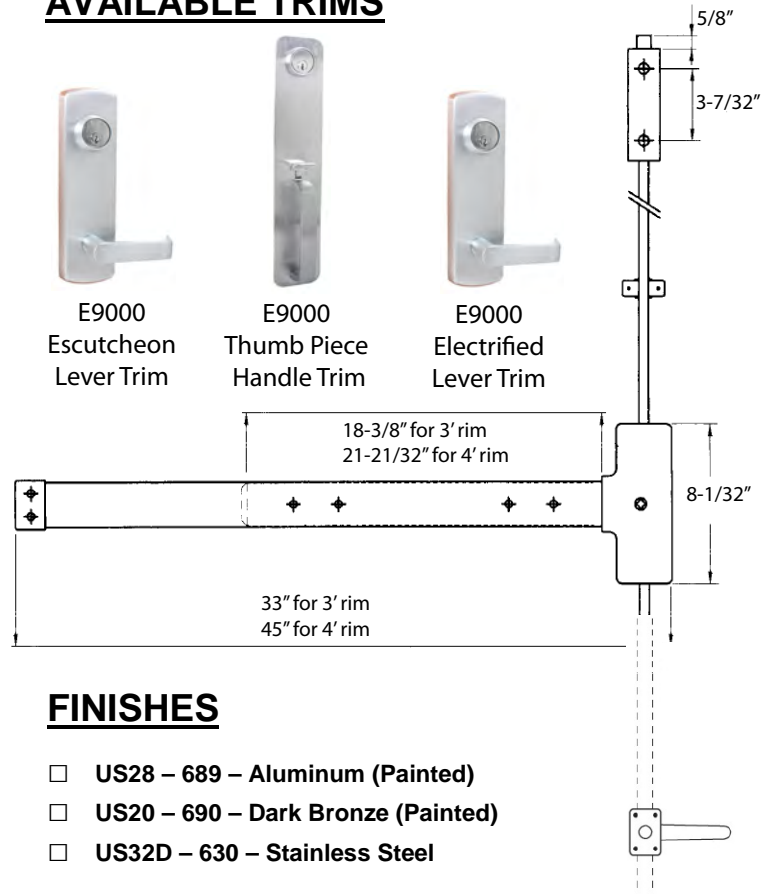

FINISHES

- US28 – 689 – Aluminum (Painted)
- US20 – 690 – Dark Bronze (Painted)
- US32D – 630 – Stainless Steel