

Cambridge

FL3B Series



FEATURES & OPTIONS

Latch Backset

Exterior: Adjustable UL deadlatch standard
Interior: Adjustable UL plainlatch standard
(other options available)

Faceplate

1" x 2-1/4" round corner standard
(other options available)

Bolt

1/2" throw

Door Thickness

Fit 1-3/8" to 1-13/16" standard

Cylinder

6-pin SC "C" keyway solid brass cylinder standard

Also available in:

5-pin KW keyway

6 & 7-pin small format interchangeable core ⚙️

Strike Plate

1-3/4" x 2-1/4" full lip round corner standard
(other options available)

Handing

Reversible for right or left handed doors

CODE COMPLIANCE

- ☐ Meets ANSI/BHMA A156.2,
Series 4000, Grade 2
- ☐ Meets ADA Requirements
- ☐ UL 3-Hour Fire Rated

WARRANTY

- ☐ Lifetime mechanical warranty
- ☐ Five years finish warranty



FUNCTIONS

Entry

Outside lever locked or unlocked by key outside or **turn-piece** inside. Inside always free.

Privacy

Outside lever locked or unlocked by **turn-piece** inside or by a coin or screwdriver outside. Inside always free.

Passage

Both levers always free.

Communicating Passage

Blank plate outside. Inside lever always unlocked.

Half Dummy

Single dummy trim for pull only.

Double Dummy

Double dummy trim for both sides of the door.

Storeroom

Outside lever always fixed and unlocked by key only. Inside lever always free.

Classroom

Outside lever locked or unlocked by key. Inside lever always free.


SPECIFICATIONS

Lockset: Lock or latchset shall be by **PAMEX** model # **FL3B Series**. All locks shall provide with 3 hour rated solid brass plain or deadlatch. Lock chassis shall have individual springs for lever return to prevent lever sag.

FINISHES

(other finishes available upon request with lead-time)

- ☐ **US15 – 619 – Satin Nickel** ⚙️
- ☐ **US26D – 626 – Satin Chrome** ⚙️
- ☐ **US3 – 605 – Polished Brass**
- ☐ **US5 – 609 – Antique Brass**
- ☐ **US19 – 622 – Matte Black**

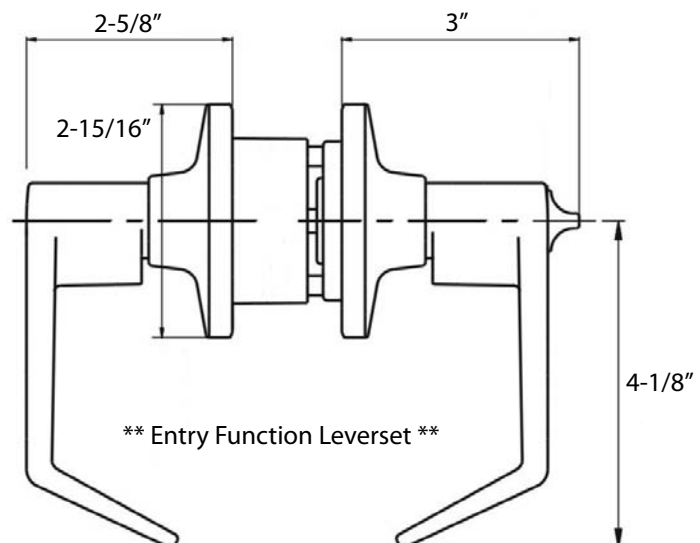

Cambridge FL3C Series



Push Button Interior

FEATURES & OPTIONS

Latch Backset

Exterior: Adjustable UL deadlatch standard
Interior: Adjustable UL plainlatch standard
(other options available)

Faceplate

1" x 2-1/4" round corner standard
(other options available)

Bolt

1/2" throw

Door Thickness

Fit 1-3/8" to 1-13/16" standard

Cylinder

6-pin SC "C" keyway solid brass cylinder standard

Also available in:

5-pin KW keyway

6 & 7-pin small format interchangeable core

Strike Plate

1-3/4" x 2-1/4" full lip round corner standard
(other options available)

Handing

Reversible for right or left handed doors

CODE COMPLIANCE

- ☐ Meets ANSI/BHMA A156.2,
Series 4000, Grade 2
- ☐ Meets ADA Requirements
- ☐ UL 3-Hour Fire Rated

WARRANTY

- ☐ Lifetime mechanical warranty
- ☐ Five years finish warranty



FUNCTIONS

Entry

Outside lever locked or unlocked by key outside or **push-button** inside. Inside always free.

Privacy

Outside lever locked or unlocked by **push-button** inside or by a coin or screwdriver outside. Inside always free.

SPECIFICATIONS

Lockset: Lock or latchset shall be by **PAMEX** model # **FL3C Series**. All locks shall provide with 3 hour rated solid brass plain or deadlatch. Lock chassis shall have individual springs for lever return to prevent lever sag.

FINISHES

(other finishes available upon request with lead-time)

- ☐ US15 – 619 – Satin Nickel
- ☐ US26D – 626 – Satin Chrome
- ☐ US19 – 622 – Matte Black

