

TABIABSORBER

Delivery format: 1x1.25 meter layers

EFFECTIVENESS: Manufactured from CR (NEOPRENE®) particles and then compressed, the tabiabsorber can be furnished in two different versions depending on its use.


VERSATILITY: The TABIABSORBER can be furnished in two different versions depending on its use.

TABIABSORBER 5: Shock absorber and noise isolator.



TABIABSORBER 10: Vibratory insulation.

We offer the cutting service upon requested dimensions.

EASY TO INSTALL: Due to its exterior texture, the adherence to plaster, glue, concrete etc it is easily done thanks to its waterproofing.

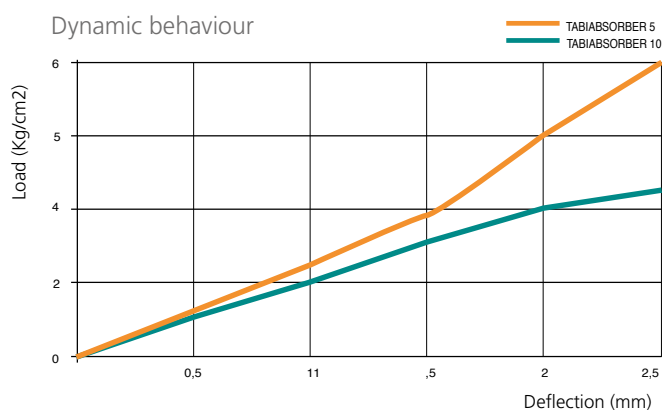

	REF. AMC	CODE
	Tabiabsorber 5	30105
	Tabiabsorber 10	30110
	Tabiabsorber Curl 8/4	30106
	Tabiabsorber Curl 17/8.	30107



The Tabiabsorber can be cutted in bands

	TABIABSORBER 5 CODE 30105	TABIABSORBER 10 CODE 30110	TABIABSORBER CURL 8/4 CODE 30106	TABIABSORBER CURL 17/8. CODE 30107	NORMA DIN
SIZES (m)			8x1,25	8x1,25	
THICKNESS (mm)	5 mm	10 mm	8/4 (8 minimum + 4 on the curl zone)	17/8 (17 minimum + 8 on the curl zone)	
DENSITY (Kg/m ³)	820	850	680-750	500-600	
WEIGHT/m ² (kg)	4.1	8.5	3,87-4,73		
FUERZA A TRACCIÓN (N/mm ²)	1.05	1.45	0,4	0,3	53571
LENGTHENING TILL RUPTURE (%)	90	108	50	40	53571
TENSIÓN BAJO PRESIÓN (N/mm ²)	0.6 a 30% of compression	0.8 a 30% of compression	0,1		53577
WATERPROOFING, K VALUE. (cm/s)	-	0.03			18035/6
MAX. TEMPERATURE (C°)	-40 a 115	-40 a 115	-30 a 80	-30 a 80	
FIRE RESISTANCE	Clase B2	Clase B2			4102
STRUCTURE NOISE IMPROVEMENT (DB)			22	28	