


Positive Displacement Web Guide

Available on machine models: SP1 & SP1DL

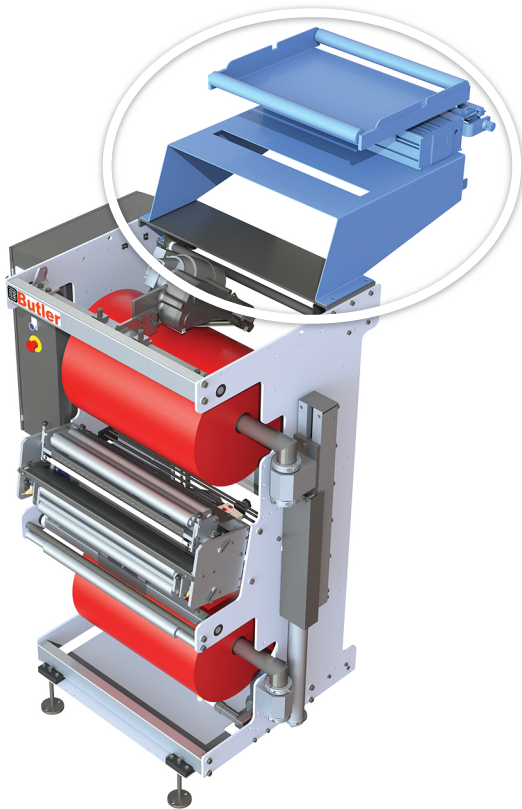

Web alignment is dynamically adjusted through continuous monitoring of the web edge position

Advantages, Functions & Features

- Allows the use of inconsistently wound material rolls
- Most accurate web tracking option, +/- 1/48th in (.5 mm)
- Electro-mechanical actuator for web positioning
- PDG orientation horizontal or vertical

Functional Requirements

- Material: paper, opaque web
- Maximum machine speed: 750 ft/min (248.3 M/min)
- Maximum incoming error: +/- 0.7-1.0 in (17-25 mm)

Installation Requirements

- Factory option or field installed