
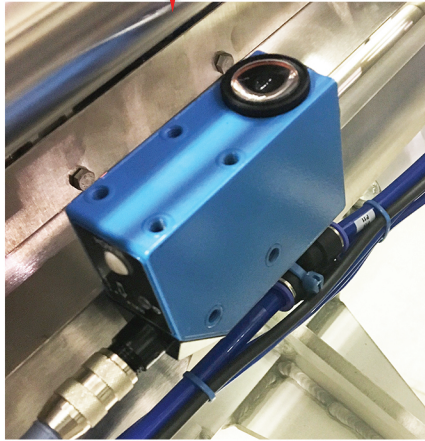


Auto-Splice Actuation from End of Roll Color Tape Sensor

Available on machine models: SP1 & SP1DL

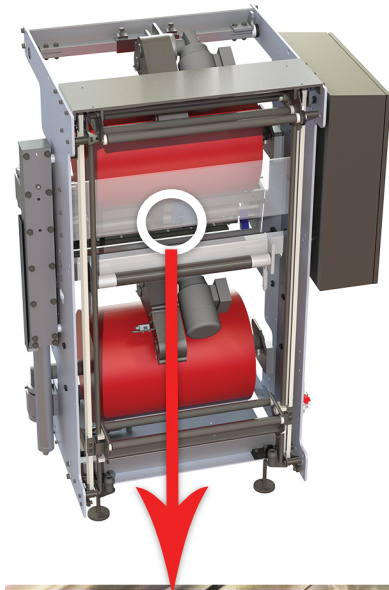

Splice is actuated when a pre-applied contrasting colored tape on the web is detected by the end-of-roll sensor

Advantages, Functions & Features

- Reduces web left on core
- Opto-electric contrast sensor
- Controlled via HMI

Functional Requirements

- Minimum trigger tape dimensions are 1 inch x 1 inch (25.4 mm x 25.4 mm)
- Color of tape must be contrast to background material/decoration
- Trigger tape placement minimum of 8-10 feet (2.4 meters - 3 meters)

Installation Requirements

- Factory option or field installed