



CNYXTE

APPLICATION

NY approved housing. Ideal for commercial and industrial facilities. LED Steel series utilizes a unique illumination design.

FEATURES:

- NY approved housing, durable and white power coated 20-gauge steel construction. Energy efficient LED, heavy duty steel housing with universal mounting kit.
- NY approved exit letters 8" height.
- Removable snap-out knockouts and chevron directional arrows.
- Single face configuration.
- 90+ minute emergency operation.
- Available in white or black housing.

MOUNTING:

- Wall mounting.
- Wall mounting directly to standard J-Box, mounting hardware provided.

ELECTRICAL:

- 120/277V dual voltage operation standard.
- Charge rate and power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.

LAMPS:


- Standard with three(3) 12 watts fully adjustable, glare-free incandescent lighting heads. High-performance smooth thermoplastic reflector and tempered glass lens for optimal light distribution.

BATTERY:

- Maintenance-free and 6V 10Ah rechargeable sealed lead acid battery on emergency (EM) units.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90 minute emergency illumination.
- LVD (Low Voltage Disconnection) prevents battery from deep discharge.

LISTING:

- 5 years limited warranty on materials and all electronics. Battery pro-rated for two years.
- LED lamps are 25 years limited warranty.
- UL listed for damp locations (20°C ~ 50°C).
- Meets UL924, National Electrical Code, NFPA 70, NFPA 101 and the Life Safety Code, NEC, OSHA, Local and State Codes.

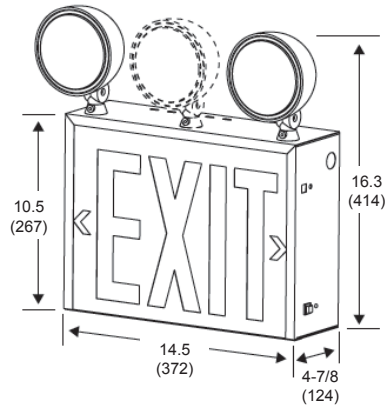

All dimensions are in inches (millimeters).

ELECTRICAL INFORMATION		
	Input Watts (W)	Input Amps (A)
Emergency Models	120V: 12.7 W 277V: 14.3 W	120V: 0.0115 A 277V: 0.056 A

ORDERING INFORMATION

EXAMPLE: CNYXTE-1-R-W-EM-3

MODEL	# OF FACE	LETTER	HOUSING COLOR	OPERATION
CNYXTE	1 Single	R Red	W White Housing B Black Housing	EM Battery Back up
# OF HEAD				
0	None			
3	Three Heads (Std.)			

EXIT & EMERGENCY