

P




**APPLICATION**

3" and 2" deep louver high performance recessed parabolic fixture. Designed for light cut-off and bright low-glare light. It is high efficiency, great performance and sleek detailing make it an ideal choice for office environments.



**DISCONTINUED**  
**Limited Stock Available**

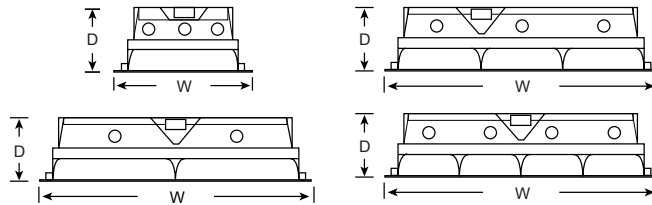

All dimensions are in inches (millimeters).

**FEATURES:**

- Die formed, cold-rolled, heavy gauge steel housing construction provides durability and strength.
- Parabolic louvers are made with anodize, semi-specular, 3" and 2" deep aluminum to perform low-glare bright light and they are interlocked to prevent vibration.
- The louvers can be hinge and spring latch from either side.
- Inside edge of housing has full flat black reveal for floating effect.
- T-bar safety clips are standard.
- Ship with plastic film to keep out construction dirt.
- Finish in high-gloss baked white enamel over rust inhibiting phosphate coating for maximum corrosion resistance.

**MOUNTING:**

- End to end row mounting available.
- Compatible with most ceiling types.
- Field installed flange kits are available.

**LAMP:**

- Standard T8, T5, T5HO and PL-L lamps are available.
- Pressure-lock lamp holders or easy twist lock lamp sockets.
- Lamp not included.

**ELECTRICAL:**

- High power factor instant start electronic ballast for T8 lamps are sound rate A, minimum starting temperature 0°F (-18°C), <10% THD and input voltage ranges of 120 to 277 volts comes as standard.
- High power factor programmed start electronic ballast for T5 and T5HO lamps are sound rate A, minimum starting temperature 0°F (-18°C), <10% THD and input voltage ranges of 120 to 277 volts comes as standard.
- Ballast disconnect plug provided as standard.

**LISTING:**

- UL/CUL listed and labeled.
- Suitable for damp locations.
- ARRA compliant (optional).

**Specifications: 1'x4'**

Length: 48 (1218)  
Width: 12 (302)  
Depth: 5-1/2 (140)  
Weight: 17.39 lbs (7.89 kg)


**Specifications: 2'x2'**

Length: 24 (608)  
Width: 24 (608)  
Depth: 5-1/2 (140)  
Weight: 15.9 lbs (7.21 kg)

**Specifications: 2'x4'**

Length: 48 (1218)  
Width: 24 (608)  
Depth: 5-1/2 (140)  
Weight: 25.15lbs (11.41 kg)

**Wiring diagram for LED ready**  
Applied AC voltage depends on LED tube spec.

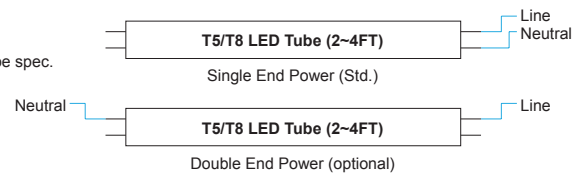

CONFIGURATIONS				
SERIES	SIZE	# OF LAMPS	LAMP TYPE	# OF CELL
P	1'x4'	1, 2, 3	25T8, 28T5, 28T8, 32T8, 54T5HO	1x6 (6), 1x8 (8), 1x9 (9), 2x8 (16)
	2'x2'	2	14T5, 17T8, 24T5HO, 31U1, 32U6, CF40	2x3 (6), 3x3 (9), 3x4 (12), 4x4 (16)
		3	14T5, 17T8, 24T5HO, 31U1, CF40	2x3 (6), 3x3 (9), 3x4 (12), 4x4 (16)
		4	14T5, 17T8, 24T5HO	2x3 (6), 3x3 (9), 3x4 (12), 4x4 (16)
2'x4'	2, 3, 4, 6	25T8, 28T5, 28T8, 32T8, 54T5HO	2x6 (12), 2x8 (16), 3x6 (18), 4X6 (24), 4x8 (32)	

**ORDERING INFORMATION**

EXAMPLE: P-24-332-18-UNV

MOD-EL	SIZE	# OF LAMPS	LAMP TYPE	# OF CELLS	LOUVER FINISH		
P 3" Deep Louver	14 1'x4'	1	14T5 F14T5 (22")	1'x2' 4	(Blank) Semi-Specular Aluminum S Specular Aluminum		
	22 2'x2'	2	28T5 F28T5 (46")	2'x4' 12			
	24 2'x4'	3	17 F17T8 (24")	1'x4' 6		16	
		4	25T8 F25T8 (48")			8	18
		6	28T8 F28T8 (48")			9	24
			31U1 F31U1 (1-5/8" leg) <sup>1</sup>			16	32
	32 F32T8 (48")	2'x2' 6	12	TRIM (Blank) Grid FK Flange Kit <sup>3</sup> SH Swing Gate Hanger			
	32U6 F32U6 (6" leg)				9		
	24T5HO F24T5HO (22")				12		
	54T5HO F54T5HO (46")				16		
	CF40 CF40 TT5 (22.5") <sup>2</sup>						
BALLAST			VOLTAGE		OPTIONS		
(Blank)	T8 Electronic Ballast, Instant Start, <10% THD or T5 Electronic Ballast, Programmed Start, <10% THD		UNV	120-277V (Std.)	AB Two Ballast for AB Switch		
LBF	T8 Electronic Ballast, Instant Start, Low Watt, <10% THD		120	120V	AR Aluminum Reflector		
HBF	T8 Electronic Ballast, Instant Start, High Light Output, <10% THD		277	277V	WR White Reflector		
PS	T8 Electronic Ballast, Programmed Start, <10% THD		347	347V	EM Lumen Emergency Ballast <sup>4</sup>		
LPS	Electronic Ballast, Programmed Start, Low Watt, <10% THD				EMC CEC compliant EM <sup>7</sup>		
HPS	Electronic Ballast, Programmed Start, High Light Output, <10% THD				DM Dimming Ballast <sup>5</sup>		
					GLR Fast Blow Fuse <sup>6</sup>		
					GMF Slow Blow Fuse <sup>6</sup>		
					MS11 Master Slave w/ 11' Whip		
					PW6 Pre-wired 6' Whip Flex #18/3		
					ARRA Assembled in USA for Buy American Act		
					DEP Double End Power for LED ready		

**NOTES:**

1. U-Bent, 1-5/8" Leg Spacing, T8: 31 Watt
2. Twin Tube Compact, 2G11 Base: 40 Watt
3. Flange kits are supplied in separate boxes, field installed.
4. Emergency Ballast options, see page 390.

5. Dimming Ballast options, see page 391.
6. Must specify voltage, not available with 347V.
7. Check with factory for more details.