NYDXR



FEATURES:

- City of New York Approved, heavy duty emergency lighting that is efficient and easy to install. It is completely self-contained and fully automatic.
- Heavy duty 20-gauge steel construction with powder coated finish.
- Thermoplastic emergency heads, two lamps standard, optional 3rd heads.
- 90+ minute emergency operation.
- · Test switch and charge rate indicator.
 - Available in white or black housing.

MOUNTING:

- Universal knockout pattern on the back for wall mount.
- Side and top knockouts for conduit feed applications.

ELECTRICAL:

- 120/277V dual voltage operation standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (Low Voltage Disconnect) prevents battery from deep discharge.

LAMPS:

- Fully adjustable, glare-free PAR type lamp head, incandescent lamps.
- 6V model: 2 x 6V 9W lamps.
- 12V model: 2 x 12V 12W lamps.
- 150 lumens per head.

BATTERY:


- Maintenance-free, 6V sealed lead acid rechargeable battery on emergency (EM) units.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90 minute emergency illumination.

OPTION:

 RC: Remote Capability of 14W standard on the 12V model. 6V model varies, check the compatibility chart listed on the separate remote heads. Remote heads not included.

LISTING:

- UL listed for dry locations (25°C).
- 5 years limited warranty on materials and all electronics. Battery pro rated for two years.
- Meets UL924, National Electrical Code, ANSI/NFPA 70 and the Life Safety Code ANSI/NFPA 101.

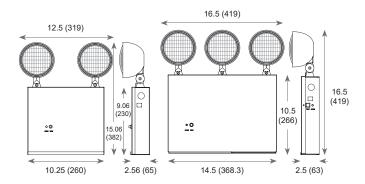

All dimensions are in inches (millimeters).

ORDERING INFORMATION

														•
														1
MODEL		VOLTAGE		# OF HEAD		UNIT WATTAGE		LAMP WATTAGE		HOUSING COLOR		OPTION		
	NYDXR	6 12	6V 12V	2 3	1110110000	18 27 50	18 W ¹ 27 W ¹ 50 W ²	9 12	9W ¹ 12W ²	WH BK	White Housing Black Housing	RC	Remote Capability	

NOTE:

- Available in 6V only.
- Available in 12V only.



EXAMPLE: NYDXR-6-2-18-WH