

# LEDSHEM



**FEATURES:**

- Durable 20-gauge steel construction.
- Thermoplastic emergency heads, two lamps standard.
- Available in white housing.

**MOUNTING:**

- Knockouts on the back for wall mount.
- Side and top knockouts for conduit feed applications.

**ELECTRICAL:**

- 120/277V dual voltage operation standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (Low Voltage Disconnect) prevents battery from deep discharge.
- Remote capacity of 20W standard.
- Runs up to 8 hours without remote heads.

**LED:**

- Long lasting, efficient, ultra bright white LED lamp heads.
- 1.5watt (12 LEDs x 0.125 watt) per head.
- 65 lumens per head.
- High performance chrome-plated metalized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provide optimal center-to-center spacing.

**BATTERY:**

- Maintenance-free, 6V sealed lead acid rechargeable battery on emergency (EM) units.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to the LED lamp heads for minimum 90-minute emergency illumination.

**LISTING:**


- 5 years warranty on all electronics and housing. Battery pro rated for 2 years.
- UL Listed for damp locations. (68°F (20°C) ~ 122°F (50°C)).
- Meets UL924, NFPA 70, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- NFPA 70 compliant.

**REMOTE LAMP CAPABILITY**

	Maximum Wattage Allowed
LEDSHEM627	20

**ELECTRICAL INFORMATION**

	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
LEDSHEM627	11.0	11.0	0.11A	0.04A

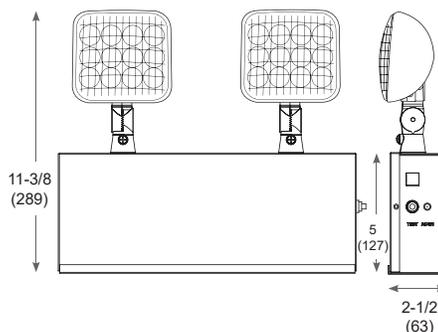

All dimensions are in inches (millimeters).

**ORDERING INFORMATION**

**EXAMPLE: LEDSHEM627**

MODEL	VOLTAGE	# OF HEAD	WATTAGE (for 90 mins.)	HOUSING COLOR
LEDSHEM	6 6V	(Blank) Two Heads	27 27W	(Blank) White Housing