

CW

Project Name:	
Type:	



APPLICATION

New narrow surface ceiling or wall mount wrap fixtures. Energy efficient fluorescent lighting fixture has linear sides prismatic acrylic diffuser provide sufficient up light and delivers diffuse and moderate down light in areas. Use for corridors and stairwells, utility closets and small office areas.

FEATURES:

- 100% acrylic, high-impact, injection molded prismatic basket diffuser with flat bottom and vertical sides.
- Diffuser choice prismatic acrylic or white opal acrylic.
- Die formed, cold-rolled, heavy gauge steel housing construction provides durability and strength.
- Models available with 1, 2, 3, 4 and 6 lamps.
- Lens are capable of being hinged from either side for easy cleaning and service.
- Screw latch system secures lens to base housing. (Wall mount)
- Finish is high-gloss baked white enamel over rust inhibiting phosphate coating for maximum corrosion resistance.

MOUNTING:

- Surface or stem mounting for individual installation.
- For ceiling or wall mounting.
- End to end row mounting option available.
- Compatible with most ceiling types.

LAMP:

- Standard T8, T5 and T5HO lamps are available.
- Pressure-lock lamp holders or easy twist lock lamp sockets.
- Lamp not included.

ELECTRICAL:


- High power factor instant start electronic ballast for T8 lamps are sound rate A, minimum starting temperature 0°F (-18°C), <10% THD and input voltage ranges of 120 to 277 volts comes as standard.
- High power factor programmed start electronic ballast for T5 and T5HO lamps are sound rate A, minimum starting temperature 0°F (-18°C), <10% THD and input voltage ranges of 120 to 277 volts comes as standard.
- Ballast disconnect plug provided as standard.

LISTING:

- UL/CUL listed and labeled.
- Suitable for damp locations.
- ARRA compliant (optional).

CONFIGURATIONS

Series	Size	# Of Lamps	Lamp Type
CW	2'	1, 2, 3	F14T5, F17T8, F24T5HO
	3'	1, 2, 3	F21T5, F25T8, F39T5HO
	4'	1, 2, 3	F28T5, F25T8, F28T8, F32T8, F54T5HO
	8'	2, 4, 6	F28T5, F32T8, F54T5HO

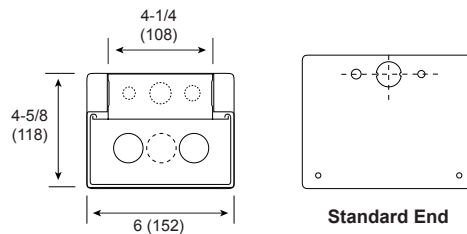

Specifications: CW-2
 Length: 24 (609)
 Width: 6 (152)
 Depth: 4-5/8 (118)
 Weight: 6.9 lbs (3.13 kg)

Specifications: CW-3
 Length: 36 (914)
 Width: 6 (152)
 Depth: 4-5/8 (118)
 Weight: 9.77 lbs (4.43 kg)

Specifications: CW-4
 Length: 48 (1220)
 Width: 6 (152)
 Depth: 4-5/8 (118)
 Weight: 10.87 lbs (4.93 kg)

Specifications: CW-8
 Length: 48 (2438)
 Width: 6 (152)
 Depth: 4-5/8 (118)
 Weight: 19.69 lbs (8.93 kg)

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: CW-4-232-UNV-LP

MODEL	LENGTH	# OF LAMPS	LAMP TYPE		DIFFUSER		BALLAST			
CW	2' Length	1	14T5	F14T5 (22")	(Blank)	Prismatic Acrylic	(Blank)	T8 Electronic Ballast, Instant Start, <10% THD or		
	3' Length	2	21T5	F21T5 (34")		HPA		High-Impact	T5 Electronic Ballast, Programmed Start, <10% THD	
	4' Length	3	28T5	F28T5 (46")	MW	Prismatic Acrylic ²		LBF	T8 Electronic Ballast, Instant Start, Low Watt, <10% THD	
	8' Length ¹	4	17	F17T8 (24")		HMW		White Opal ²	HBF	T8 Electronic Ballast, Instant Start, High Light Output, <10% THD
		6	25	F25T8 (36")				High-Impact White Opal ²		
				25T8	F25T8 (48")				PS	T8 Electronic Ballast, Programmed Start, <10% THD
				28T8	F28T8 (48")				LPS	Electronic Ballast, Programmed Start, Low Watt, <10% THD
				32	F32T8 (48")				HPS	Electronic Ballast, Programmed Start, High Light Output, <10% THD
				24T5HO	F24T5HO (22")					
				39T5HO	F39T5HO (34")					
				54T5HO	F54T5HO (46")					

# OF BALLAST		VOLTAGE		OPTIONS	
(Blank)	Standard configuration;	UNV	120-277V	AB	Two Ballast for AB Switch
	2L - 1/2L	120	120V	CW	Cold Weather Ballast (Minimum Starting Temp. -20°F/-29°C)
	3L - 1/3L	277	277V	EM	Emergency Ballast ³
	4L - 1/4L	347	347V	EMC	CEC compliant EM ⁶
	6L - 1/2L & 1/4L			DM	Dimming Ballast ⁴
2/2	2-Ballasts, 4 Lamp			GLR	Fast Blow Fuse ⁵
3/3	2-Ballasts, 6 Lamp			GMF	Slow Blow Fuse ⁵
*/	other ballast configuration options as specified.			ARRA	Assembled in USA for Buy American Act

NOTES:

1. For tandem double-length unit. (Example): CW-8-432
2. MOQ : 100pcs
3. Emergency Ballast options, see page 390.
4. Dimming Ballast options, see page 391.
5. Must specify voltage, not available with 347V.
6. Check with factory for more details.