

WB

Project Name:	
Type:	



One-Piece Ends



One-Piece Slide-On Ends & Ultrasonic Sensor



APPLICATION

Wall/Ceiling mounted luminaire, and optional with integral ultrasonic motion sensor provides luminaire applications. Ideal for use in wall, corridors, stairwells, closets, laundry, bathrooms, dormitories, hallways and general work areas.

FEATURES:

- High-gloss white on die formed 20 gauge cold rolled steel housing and one-piece metal ends. Come as white finish (Std.)
- Clear prismatic acrylic diffuser; optional smooth white acrylic diffuser.
- Optional One piece slide-on ends.
- Baffles and dividers are available for up light and/or down light; four-position pull-switch.
- Optional rocker switch, grounded convenience outlet and GFCI.
- Optional integral ultrasonic occupancy sensor to sense motion within a space and automatically turn lights on.
- Wall or ceiling mounted.

LAMP:

- Standard T8, T5 lamps are available.
- Pressure-lock lamp holders or easy twist lock lamp sockets.
- Lamp not included.


ELECTRICAL:

- High power factor instant start electronic ballast for T8 lamps are sound rate A, minimum starting temperature 0°F (-18°C), <10% THD and input voltage ranges of 120 to 277 volts comes as standard.
- High power factor programmed start electronic ballast for T5 and T5HO lamps are sound rate A, minimum starting temperature 0°F (-18°C), <10% THD and input voltage ranges of 120 to 277 volts comes as standard.
- Ballast disconnect plug provided as standard.

LISTING:

- UL/CUL listed and labeled.
- Suitable for damp locations.
- Made in USA.
- ARRA compliant.

INDOOR




Specifications: WB

Length: 24-1/4 (616)
36-1/4 (921)
48-1/4 (1226)

Height: 4-1/2 (114)
Width: 4-3/8 (111)

All dimensions are in inches (millimeters).

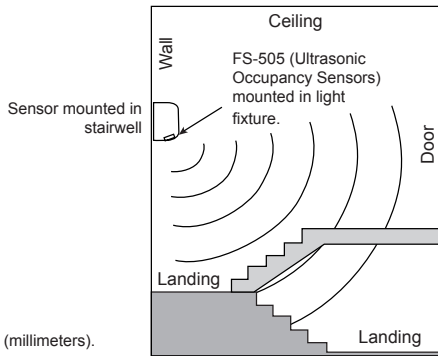

BI-LEVEL STAIRWELL

FS-505 Series sensors use high frequency (40 kHz) ultrasonic technology to sense motion within a space and automatically turn lights on even when the sensor has no direct line of sight to occupants.

FS-505 can provide bi-level lighting control in fixtures.

ORDERING INFORMATION

EXAMPLE: WB-2-32-UNV-AB

MODEL	# OF LAMPS	LAMP TYPE	DIFFUSE	BALLAST	
WB ¹	1 2	14T5 F14T5 (22")	(Blank) Clear Prismatic Acrylic WA Smooth White Acrylic	(Blank) T8 Electronic Instant Start, <10% THD or T5 Electronic Ballast, Programmed Start, <10% THD	
		28T5 F28T5 (46")			
		17 F17T8 (24")			
		25 F25T8 (36")			
		32 F32T8 (48")			
		24T5HO F24T5HO (22") 54T5HO F54T5HO (46")			
VOLTAGE		OPTIONS			
UNV	120-277V	AB	Two Ballast for AB Switch	PS1	Pull-switch (all lamps) O/F ⁸
120	120V	EM	Emergency Battery Pack ^{4,5,7}	PS4	Pull-switch up/down lamps O/F ⁸
277	277V	EMC	CEC compliant EM ⁶	GLR	4-Position (front, rear, all on and all off)
347	347V	UMS	Ultrasonic Occupancy Sensors ^{3,7}	GMF	Fast Blow Fuse ⁴
		HFMS	High Frequency Sensor w/ Hold-Off Daylight Control ³	SOE	Slide-On Ends
				GO	Convenience Outlet (3 prong) Installed

NOTES:

1. 2ft fixture not available (2) ballast & EM option.
2. Dimming Ballast options, see page 391.
3. Occupancy sensor must work with programmed start ballast.
4. Must specify voltage, not available with 347V.
5. Emergency Ballast options, see page 390.
6. Check with factory for more details.
7. SDM+UMS+EM option is not available.
8. 120V only.