

TCEX

| | |
|---------------|--|
| Project Name: | |
| Type: | |



APPLICATION

Ideal for commercial where economy, appearance and the ultimate ease of installation and maintenance are desired. Solid-state electronics offer both reliability and low-cost performance.

FEATURES:

- Thin Thermoplastic LED Exit Sign Compact size low-profile design LED exit sign.
- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Innovative snap-together design allows for fast and easy installation.
- Letters 6" height with 3/4" stroke.
- Easily removable snap-out knockouts and chevron directional arrows.
- 90+ minute emergency operation.
- Available in white or black housing.

MOUNTING:

- Mounting canopy included for top or end mount.

ELECTRICAL:

- 120/277V dual voltage operation standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.

LAMPS:


- Ultra-bright, energy efficient, long-life Red or Green LEDs with more than 10 year lifecycle.
- LEDs have a minimum rated lamp life of 100,000 hours.

BATTERY:

- Long-life, maintenance-free, rechargeable NiCd battery on emergency (EM) units.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90 minute emergency illumination.

LISTING:

- 5 years limited warranty on aaterials and all electronics. Battery prorated for five years.
- LED lamps are 25 years limited warranty.
- UL listed for damp locations. (32°F ~ 122°F / 0° ~ 50°C)
- Meets UL924, NFPA 70, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

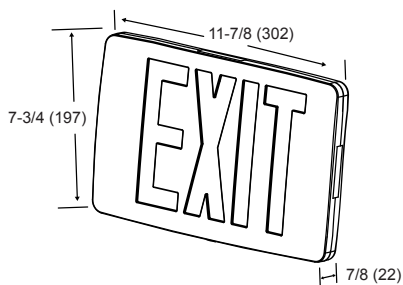

All dimensions are in inches (millimeters).

ELECTRICAL INFORMATION

| | Input Watts (W) | | Input Amps (A) |
|--|-----------------|------|----------------|
| | Red / Green | 120V | 1.0W |
| | 277V | 1.0W | 0.010A |

ORDERING INFORMATION

EXAMPLE: TCEX-S-R-1-AL

| MODEL | # OF FACE | LETTER | OPERATION | HOUSING COLOR | OPTIONS |
|-------|----------------------|------------------|---|---|---|
| TCEX | S Single D Double | R Red G Green | (Blank) 1 AC-only Battery Back up | AL Aluminum Face / Aluminum Housing WH White Face / White Housing BK Black Face / Black Housing | WG-1 Steel Wire Guard (13.5" x 15" x 6") PCS-1 Polycarbonate Guard (3.25" x 9" x 2.75") BG-1 Polycarbonate Vandal Shield Guard (15" x 22" x 8") |