

# TED

Project Name:	
Type:	



**APPLICATION**

Ideal for commercial and industrial facilities where economy, appearance and the ultimate ease of installation and maintenance are desired. LED die-cast aluminum series utilizes a unique illumination design in an architecturally pleasing housing.

**FEATURES:**

- Low Profile thin aluminum housing with universal mounting kit.
- Innovative snap-together design allows for fast and easy installation.
- Letters 6" height with 3/4" stroke.
- Field selectable knockout Chevron directional indicators.
- 90+ minute emergency operation.
- Available in white, black or aluminum housing.

**MOUNTING:**

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

**ELECTRICAL:**

- 120/277V dual voltage operation standard.
- Charge rate and power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.

**LAMPS:**


- LED lamps are operating in normal (AC input) and emergency (DC input) modes.
- Ultra-bright, energy efficient, long-life Red or Green LEDs with more than 10 year lifecycle.
- LEDs have a minimum rated lamp life of 100,000 hours.

**BATTERY:**

- Maintenance-free and rechargeable Ni-Cad battery on emergency (EM) units.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90 minute emergency illumination.

**LISTING:**

- 5 years limited warranty on materials and all electronics. Battery pro rated for five years.
- UL listed for damp locations. (32°F ~ 122°F / 0°C ~ 50°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.
- NFPA 70 compliant.

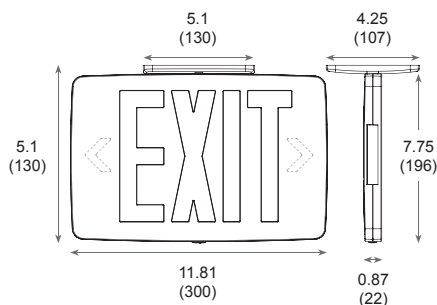

All dimensions are in inches (millimeters).

**ELECTRICAL INFORMATION**

	Input Watts (W)		Input Amps (A)
Red / Green	120V	1.0W	0.010A
	277V	1.0W	0.010A

**ORDERING INFORMATION**

*EXAMPLE: TED-S-R-1-AL*

MODEL	# OF FACE	LETTER	OPERATION	HOUSING COLOR	OPTIONS
TED	<b>S</b> Single <b>D</b> Double	<b>R</b> Red <b>G</b> Green	<b>(Blank)</b> <b>1</b> AC-only Battery Back up	<b>AL</b> Aluminum Face / Aluminum Housing <b>WH</b> White Face / White Housing <b>BK</b> Black Face / Black Housing	<b>WG-1</b> Steel Wire Guard (13.5" x 15" x 6") <b>PCS-1</b> Polycarbonate Guard (3.25" x 9" x 2.75") <b>BG-1</b> Polycarbonate Vandal Shield Guard (15" x 22" x 8")