

WL1D WL1H, O, Q

DISCONTINUED
Limited stock available

Project Name:	
Type:	



APPLICATION

The outdoor LED bulkheads and accent wall or ceiling fixtures are rated for wet location. Ideal for both commercial and residential applications. Use on packing areas, entrances, walkways entrances, walkways or building surface.

FEATURES:

- Cast aluminum door frame with UV stabilized polycarbonate diffuser.
- Casting dissipates ballast heat for long life.
- White powder paint finish aluminum designed reflector for best light efficiency.
- Silicone rubber is included to prevent any leakage from the outside.
- Dark bronze powder paint finish standard on frame and housing.
- For optional finishes, black, gray and white consult factory.
- "D" and "Q" series with hood for wall mount only.
- "H" series with guard for wall and ceiling mount. "O" series with opal lens for wall and ceiling mount.

MOUNTING:

- Wall or ceiling mounting.
- Die cast aluminum housing allows firm mounting over recessed junction boxes or on flat surfaces for 1/2" surface conduit.

ELECTRICAL:

- LED input 20 watts drivers 13 LEDs.
- CREE XPG LED, 130 lm/W
- Min. 1550 lumen output.
- Input Voltage: 120V-277V, 50/60Hz.
- LEDs have nominal 5000K standard color.
- Color Temperature: 4000/5000 (K).^{2,3}
- Operating temperature: -4°F (-20°C) ~ 104°F (40°C).

LISTING:

- UL/CUL listed.
- Listed to UL 1598 and UL 8750.
- Suitable for wet location.
- 5 years limited warranty.



WL1D




WL1H



WL1O



WL1Q

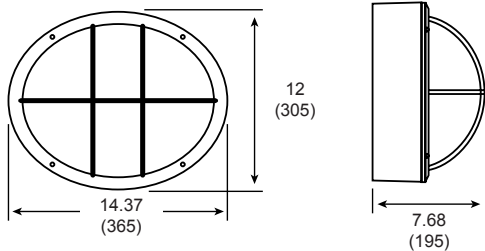

All dimensions are in inches (millimeters).

CONFIGURATIONS

Model	Wattage	B.U.G. Rating
WL1D, H, O, Q	13W	B1-U2-G1

Specifications: WL1D, H, O, Q

Weight: 9.26 lbs (4.2 kg)

ORDERING INFORMATION

EXAMPLE: WL1D-13LED-50K-UNV-BZ

MODEL	LED	COLOR TEMP.	VOLTAGE	FINISH	OPTIONS
OVAL SHAPE WL1D WL1H WL1O WL1Q	13LED 20W Input Power	-40K -50K 4000K ² 5000K ³	UNV 120-277V	BZ Dark Bronze (Std.) WH White BK Black <small>* Available custom color (RAL). Please provide us with the RAL number. * Non-standard finish with extra charge.</small>	EMG8 8W EM Battery Backup (CEC Compliant EM) ¹ EMG15 15W EM Battery Backup (CEC Compliant EM) ¹ EMG20 20W EM Battery Backup (CEC Compliant EM) ¹ PC1 With Photocell - Button Type 120V PC2 With Photocell - Button Type 277V PC3 With Photocell - Button Type 120-277V

NOTES:

1. Contact factory for other emergency ballast options.
2. Only available with WL1O.
3. Only available with WL1D, WL1H, WL1Q.