

# RHSLED

Project Name:	
Type:	



**INDOOR LED THERMOPLASTIC REMOTE HEADS : SQUARE**

**FEATURES:**

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic housing.
- High performance chrome-plated metalized reflector and plastic lens for optimal light distribution.

**MOUNTING:**

- Universal mounting adapter plate included, mounts to single-gang switch box. Suitable for wall or ceiling mount.

**LED:**

- Adjustable LED lamp heads provide optimal center-to-center spacing.
- 1.0W (8 LEDs x 0.125 watt) per head.

**ELECTRICAL:**

- Powered from low voltage power source with low voltage wiring (not provided). Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.


**LISTING:**

- 5 years limited warranty.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL listed with compatible product listed in the chart.
- NFPA 70 compliant.

**COMPATIBILITY CHART**

\* Reference individual unit equipment specification sheets for remote load capacity availability.

Model	MV	3.6V	6V	9.6V
EXL-RC*	V		V	
LEDR5HO	V	V		
R-16HO*	V		V	
LEDCXTEU-RC	V			V
LEDCAEM	V		V	
CKXTE-RC	V	V		
CXTE-RC*	V		V	
EM1-HO*	V		V	
NYDXR-RC	V			
LEDSHEM	V		V	
CEU-RC*	V	V		

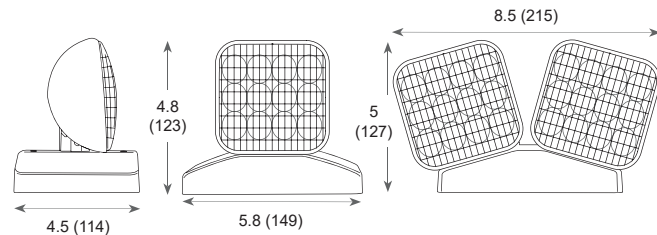

All dimensions are in inches (millimeters).

\* SDT versions of the fixtures are not compatible with remote heads.

**ORDERING INFORMATION**

**EXAMPLE: RHSLED-1-MV**

MODEL	HEADS	OPTIONS		VOLTAGE		COLOR		WATTAGE <sup>1</sup>	
RHSLED	1 2 Single Head Double Head	(Blank)	For standard non-self-diagnostic fixtures	MV	For use with 3.6V, 6V, 9.6V & 12V DC Power Source	(Blank)	White Housing	(Blank)	8LEDs 1W
		SDT	For use with fixtures with a self-diagnostic option	3.6V 6V 9.6V 12V	3.6V 6V 9.6V 12V	B	Black Housing	HL	12LEDs 1.5W

NOTES:

1. Wattage rating stated per head.

# RH16LED

Project Name:	
Type:	



### INDOOR LED MR16 THERMOPLASTIC REMOTE HEADS : SQUARE

**FEATURES:**

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic housing.
- Adjustable LED lamp heads provide optimal center-to-center spacing.

**MOUNTING:**

- Universal mounting adapter plate included, mounts to single-gang switch box. Suitable for wall or ceiling mount.

**LED:**

- 3.3 watt (3 LEDs x 1.1 watt) per head.
- Optional high lumen heads are 5 watt (7 LEDs x 0.7 watt per head) and provide increased center to center pricing.

**ELECTRICAL:**

- Powered from low voltage power source with low voltage wiring (not provided). Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.

**LISTING:**


- 5 years limited warranty.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- NFPA 70 compliant.

**COMPATIBILITY CHART**

\* Reference individual unit equipment specification sheets for remote load capacity availability.

Model	MV	3.6V	6V	9.6V	12V
EXL-RC*	V		V		
LEDR5HO	V	V			
R-16HO*	V		V		
LEDCXTEU-RC	V			V	
LEDCAEM	V		V		
CXTE-RC*	V		V		
EM1-HO*	V		V		
NYDXR-RC	V				V
LEDSEHM	V		V		
CADXR	V		V		

\* SDT versions of the fixtures are not compatible with remote heads.

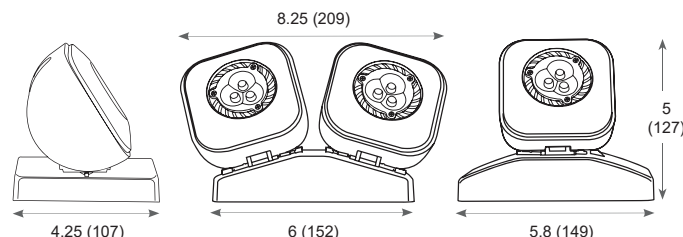

All dimensions are in inches (millimeters).

**ORDERING INFORMATION**

*EXAMPLE: RH16LED-1-MV*

MODEL	HEADS		COLOR		VOLTAGE		WATTAGE <sup>1</sup>	
					MV	For use with 3.6V, 6V, 9.6V & 12V DC Power Source	(Blank)	3LEDs 3.3 Watts 7LEDs 5.0 Watts
RH16LED	1 Single Head 2 Double Head		(Blank)	White Housing Black Housing	3.6V	3.6V	(Blank)	
					6V	6V		
					9.6V	9.6V		
					12V	12V		

**NOTES:**

1. Wattage rating stated per head.