

ODW LED

Project Name:	
Type:	



APPLICATION

This indoor & exterior decorative wall sconce is ideal for both commercial and residential application. Ideal for building entrances or walkways with wall mounting.

FEATURES:

- Solid metal accent bars.
- Sealed and gasketed construction.
- Oven cured no VOC acrylic powder coat.
- Fabricated 1/8" thick white acrylic diffuser, F1 rated, UV stable, UL-94 HB flame class rated.
- Easy relamping.

MOUNTING:

- Mounts to standard electrical junction box (by others) with provided hardware.

LED:


- Color Temperature: 2700/3000/3500/4000/5000 (K).
- LED Module: High efficiency up to 162 LPW.
- Service life: Greater than 60,000 hours(L₇₀) minimizing maintenance frequency.
- Poke in wire connectors.
- Color variation within 3-step MacAdam ellipse.
- Color Rendering Index: 80+

ELECTRICAL:

- High power factor electronic driver, operate from a 120~277 Vac input range, 50 / 60 Hz.
- Dimming Control: 10%~100% (std.), 1~100%, Bi-level step dim. ¹
- Power Factor: +0.9
- Efficiency: +85%
- Ambient Operating Temperature: -22°F (-30°C) ~ 122°F (50°C).
- Constant Current, Class 2

LISTING:

- 5 year product warranty.
- UL listed for wet location mounting 4' above grade.
- Listed to UL 1598 and UL 8750.
- ARRA compliant.



Specifications: ODW LED

Height: 16 (406), 24 (609), 36 (914), 48 (1219)
 Width: 7-1/4 (184)
 Depth: 5-1/2 (140)

All dimensions are in inches (millimeters).

CONFIGURATIONS

Series	LED	AC Input	Lumen Output	Lumen Efficiency
ODW	14LED	16.4W	1427 lm	87 lm/W
	20LED	22.4W	1946 lm	86.8 lm/W
	25LED	27.4W	2380 lm	86.8 lm/W
	60LED	60W	5208 lm	86.8 lm/W

ORDERING INFORMATION

EXAMPLE: ODW-14LED-40K-UNV

MODEL	LENGTH	TRIM	LED	COLOR TEMP.	CRI
ODW LED	(Blank) 2 16" 3 2FT 4 3FT 4 4FT	(Blank) A 2 Horizontal accent bars No accent bars * Contact factory for custom trim design.	14LED 14W LED 20LED 20W LED 25LED 25W LED 60LED 60W LED * Contact factory for custom wattage or lumen requirement.	-27K 2700K -30K 3000K -35K 3500K -40K 4000K -50K 5000K	(Blank) C9 80+ CRI (Std.) 90+ CRI

VOLTAGE	FINISH	DIMMING	OPTIONS
UNV 120-277V (Std.) 120 120V 277 277V	NA Natural Aluminum *GR (Std.) *BZ Gray *WH Bronze *BK White Black * Available custom color (RAL) Please provide us with the RAL number. * Non-standard finish with extra charge.	DM 0-10V 10%~100% DM1 0-10V 1~100% dim SD50 Bi-Level Step dim 50/100 ^{1,2} * Contact factory for custom minimum dimming level set up. (Custom set up is not available with SD50)	REM Remote EM (32°F ~ 122°F/ 0°C ~ 50°C) REMCW Remote EM for Cold Weather (-4°F ~ 122°F/ -20°C ~ 50°C) EMG8 Integrated 8W EM Battery Backup ³ BG Bird Guard, Stainless Steel Spikes

NOTES:

1. Contact factory for custom wattage or lumen requirement.
2. Lumens and watts per foot may differ for STEP drivers, consult factory.
3. Contact factory for other emergency ballast options.

ODW LED




2 Horizontal accent bars




No accent bars


ODW-14LED

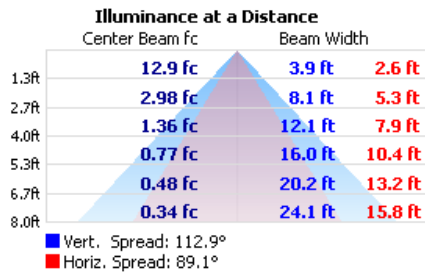

ODW-20LED

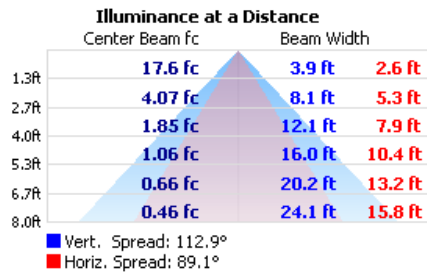

ODW-25LED

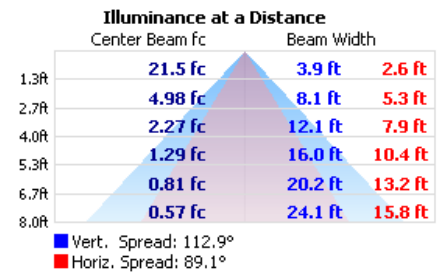

ODW-60LED

