


Please note illustrations are not to scale. All measurements are in millimetres. please contact your Solis Products representative for additional information.

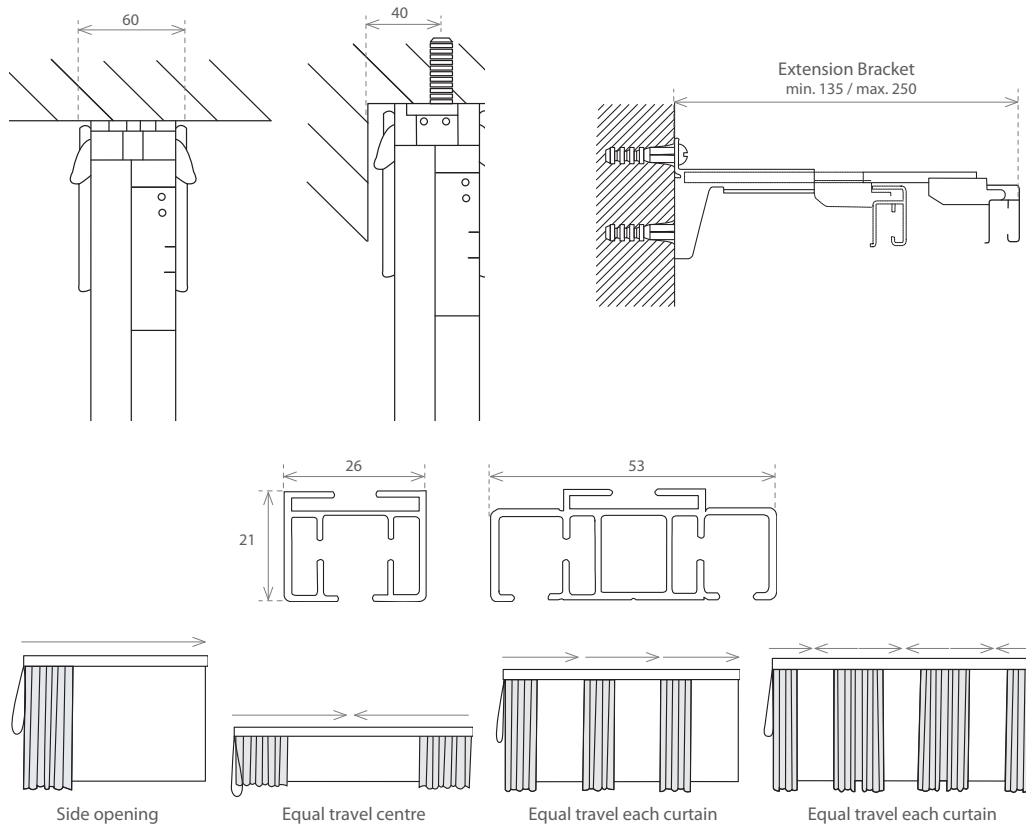

	HAND OPERATED	CORD OPERATED	MOTORISED
<b>TRACK PROFILE</b>	S-fold and single track: 23mm deep x 15mm wide powder coated extruded aluminium	23 x 25mm powder coated extruded aluminium. Can be forward or reverse bent.	Single track: 21 x 26mm Double track: 20 x 53mm powder coated extruded aluminium. can be forward or reverse bent.
<b>MAX CURTAIN WEIGHTS</b>	Straight centre open Max 40kg per 6m's ( see chart)	Straight centre open Max 35kg per 6m's (see chart)	Straight centre open Max 65kg per 20m's (see chart)
<b>STANDARD TRACK LENGTHS</b>	6m's all colours	6m's all colours	6m's white and optional custom colours are available
<b>DRAW SPEED</b>	N/A	N/A	25cm/second
<b>MECHANISM</b>	Roller gliders glide on rim of front channel - eye of glider is pushed forward to avoid friction.	Super efficient roller gliders within enclosed cord channels - the cord cannot slip out.	Power 521:212W/220v. A sophisticated end stop device automatically controls the opening and he closing of the curtains. System is protected from overload or accidental stops. It is possible to preset the stopping point of the curtains.
<b>FIXING METHODS</b>	Face fix with adjustable brackets ( all colour matched) Top fix with concealed brackets	Face fix with adjustable mounting bracket ( extension may vary) Top fix with concealed bracket.	Top fix with adjustable brackets plus top fix with concealed mounting brackets