

Project name: \_\_\_\_\_

Type: \_\_\_\_\_



Wall mounted luminaire for commercial interior applications. Modern minimal design suitable for lobbies, corridors , or other applications where low glare indirect lighting is desired. ADA compliant.

**Luminaire characteristics:**

**Power input:** 13W

**Lumens:** 606 lm

**Luminaire efficacy:** 46 lm/W

**Source:** White LED, (LM-80 tested).

3000K: 80CRI

3000K: 90CRI

**Lumen maintenance:** >70% of initial lumens at 50 000 hours (L70)  
LM-79 tested.

**Optics:** Diffused indirect light.

**Material:**

Body: Die-cast aluminum.

Diffuser: Tempered glass.

**Electrical:** Integral high efficiency electronic power supply, rated at 50 000 hours, 120/277V.

**Dimming:** Standard power supply compatible with leading (Triac) and trailing edge (ELV) for 120V only.


**Mounting:** See mounting options on page 2.

**Finish:** White or Black matte painted

**Weight:** 2lbs (0.91kg).

**Warranty:** 5 year limited warranty.

**Certification:** cULus listed for damp location.

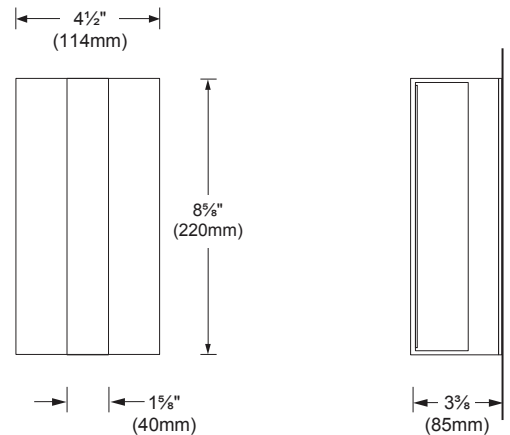

**FRONT VIEW**



**SIDE VIEW**

Project name: \_\_\_\_\_

Type: \_\_\_\_\_

**TECHNICAL DATA**


LOAD	CCT	CRI	OPTIC	DELIVERED LUMENS	LUMINAIRE EFFICACY	MAX CANDLE POWER	MODEL
(W)	(K)			(lm)	(lm / w)	(cd)	
13W	3000K	90	Indirect light	606	46	202	1230




3000K - 90 CRI - Accent light

**SURFACE MOUNTING OPTIONS**


**J2** - 2" junction box with integral power supply. Mounting adapter plate for junction box installation. Min 1/4" (48mm) deep




**DF** - Direct feed with integral power supply. Connections made inside fixture (14-18AWG). Rigid or flexible conduit up to Ø1" cabtire, romex or bx. Installed directly to surface.



**JB** - 4" junction box with integral power supply. Mounting adapter plate for junction box installation. Min 1 1/2" (38mm) deep



Direct feed position



**ORDERING INFO**

<b>1230</b>	-	-	-	-	-
MODEL	MOUNTING	LED	VOLTAGE	FINISH	DIMMING
	<input type="radio"/> <b>DF</b> - Direct feed <input type="radio"/> <b>J2</b> - Surface mounted with single gang box <input type="radio"/> <b>JB</b> - Surface mounted with junction box	<input type="radio"/> <b>830</b> - 3000K, 80CRI <input type="radio"/> <b>930</b> - 3000K, 90CRI	<input type="radio"/> <b>120</b> - 120V <input type="radio"/> <b>277</b> - 277V	<input type="radio"/> <b>01</b> - White <input type="radio"/> <b>52</b> - Black Matte	<input type="radio"/> <b>LTE</b> - Leading and trailing edge dimming (120V only)

DUE TO CONTINUOUS IMPROVEMENTS, THE INFORMATION HEREIN MAY BE CHANGED WITHOUT NOTICE.

LAST UPDATE: NOVEMBER 02, 2016

NA - R1