




®

# PWCT140D

## PACKAGED WATER-COOLED 16 HP DUAL CIRCUIT SCROLL WITH TANK

### DIMENSIONAL DRAWINGS

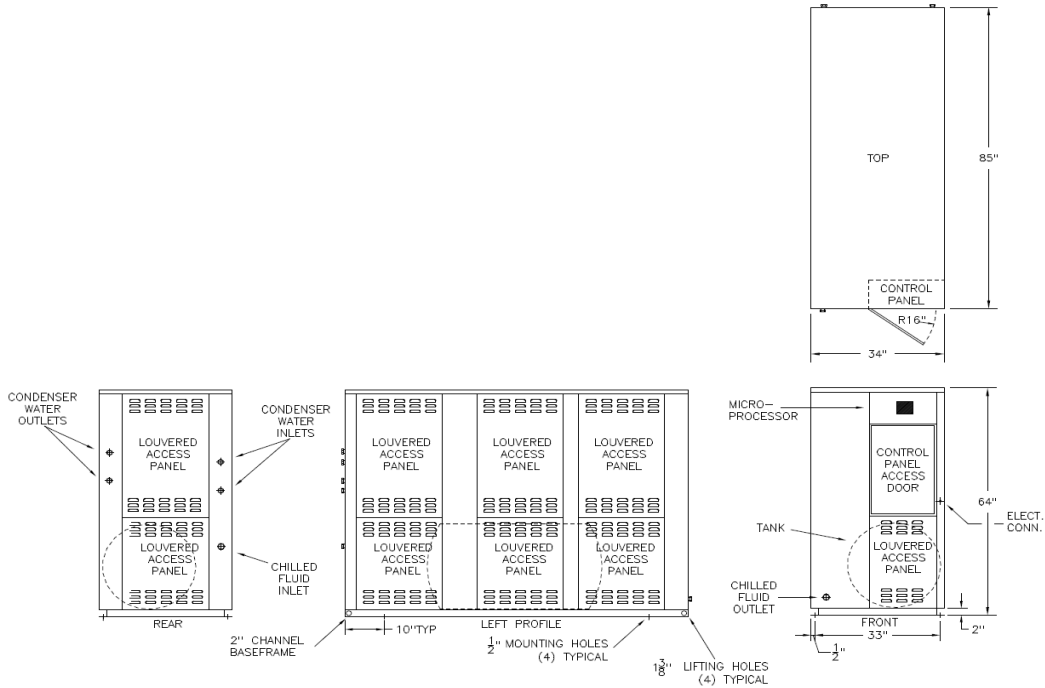

LENGTH	WIDTH	HEIGHT	WEIGHT	TANK CAPACITY	FLUID CONNECTIONS
85"	34"	64"	1950 LBS	90 GAL.	1 1/2" F-NPT

### PRODUCT PERFORMANCE INFORMATION

REFRIGERANT	COMPRESSOR OPER. TEMP. SUCTION RANGE	LFT °F	70°F COND		90°F COND		105°F COND		120°F COND	
			TONS	EER	TONS	EER	TONS	EER	TONS	EER
R407C	25°F to 55°F	40	12.6	19.1	11.9	14.1	11.0	10.9	9.9	8.2
		45	14.0	21.0	13.2	15.6	12.3	12.1	11.1	9.1
		55	17.1	25.4	16.2	18.9	15.1	14.9	13.8	11.3
		65	N/A	N/A	19.6	22.9	18.4	18.1	17.0	13.9
		70	N/A	N/A	21.5	25.0	20.3	19.9	18.8	15.3
R404A	-10°F to 45°F	5	7.3	9.9	6.2	6.8	5.2	4.9	4.1	3.2
		15	9.3	12.1	8.0	8.5	6.8	6.3	5.6	4.4
		30	12.9	16.0	11.2	11.5	9.7	8.7	8.1	6.3
		45	17.5	21.0	15.2	15.0	13.2	11.4	11.1	8.4
		55	N/A	N/A	18.3	18.0	16.0	13.7	13.4	10.1
		60	N/A	N/A	20.0	19.9	17.5	15.0	14.7	11.1

**DRAKE REFRIGERATION INC**  
 2900 SAMUEL DRIVE  
 BENSLEM, PA 19020  
 (888) 289-7299  
[www.drakechillers.com](http://www.drakechillers.com)

\*ALL INFORMATION **FOR REFERENCE ONLY**



®

# PWCT140D

## PACKAGED WATER-COOLED 16 HP DUAL CIRCUIT SCROLL WITH TANK

STANDARD FEATURES	
FEATURE	BENEFIT
Listings	ETL 3046941, UL STD 1995, CAN/CSA STD, C22.2 No. 236
Microprocessor Control	Stand alone, simple, accurate control with over 10 years of field testing
Stainless Steel Brazed Plate Evaporator	Corrosion resistant evaporator wrapped in closed cell insulation
Copeland Scroll Compressor	Industry leader, long lasting compressor
Compressor Crankcase Heater	Prevents compressor damage caused by cold refrigerant on startup
Suction Accumulator	Protects the compressor from damage caused by liquid flood back by preventing liquid from entering the compressor
Water Flow Switch	Protects against process fluid freezing caused by fluid pump failure
Hot Gas Bypass	Aids in the prevention of evaporator freeze ups and capacity control
Coaxial Steel/Copper Tube Condenser	Highly efficient water cooled design
Painted Galvanized Steel Metal Cabinet	Sturdy, corrosion resistance, professional appearance
Insulated Process Fluid Lines	Maximum thermal efficiency
Factory Tested	Ensures the unit meets the customer's performance designed criteria and arrives in working order
Full Refrigerant Charge	Hassle free and more efficient installation
Stainless Steel Storage Tank	Closed cell insulation for increase temperature control with reliable, corrosion resistant, stainless steel recirculation pump
NEMA 3R Rated Electrical	Indoor/outdoor use

AVAILABLE OPTIONS	
OPTIONS	AVAILABLE
Controls	BMS, BAS communications, remote access, monitoring services
Extended Warranty	4 year extended compressor warranty
Electrical	Compressor fusing, phase monitors, disconnects and more
Stainless Steel Pumps	1/3 HP to 25 HP on board pumps in multiple configurations & options
Fluid Piping Upgrades	Flow meters, pressure gauges, low flow bypass valves, and more
Head Pressure Control	Condenser Water Regulating valves
Other	Casters, service outlets, city water add-ons, heaters, water reg. valves etc.

*More options and customization available, contact factory for information: (888) 289 - 7299*

AVAILABLE MODEL NUMBER VOLTAGE REFERENCE
T3 (208-230/3/60) --- T4 (460/3/60) --- T5 (575/3/60)

PRODUCT INFORMATION											
MODELS AVAILABLE		COMPRESSOR			CONDENSER		RLA EA	LRA EA	MCA	MOP	EVAP. PUMP EA
		MODEL	QTY	HP	QTY	CONNECTION					
R407C	R404A	ZB58KCE	2	8 EA	2	1 1/4" F-NPT	32.1	195	85	110	10
PWCT140D3-T3-Z							16.4	95	40	55	2.8
PWCT140D3-T4-Z							12	80	30	40	1.8
PWCT140D3-T5-Z											
PWCT140D6-T3-Z		ZB58KCE	2	8 EA	2	1 1/4" F-NPT	30.7	195	80	105	10
PWCT140D6-T4-Z							16.4	95	40	55	2.8
PWCT140D6-T5-Z							12.9	80	35	40	1.8

**DRAKE REFRIGERATION INC**  
 2900 SAMUEL DRIVE  
 BENSLEM, PA 19020  
 (888) 289-7299  
 www.drakechillers.com

\*ALL INFORMATION **FOR REFERENCE ONLY**