




PACL800D-T

PACKAGED AIR-COOLED 80 HP DUAL CIRCUIT LOW-TEMP SCREW

DIMENSIONAL DRAWINGS

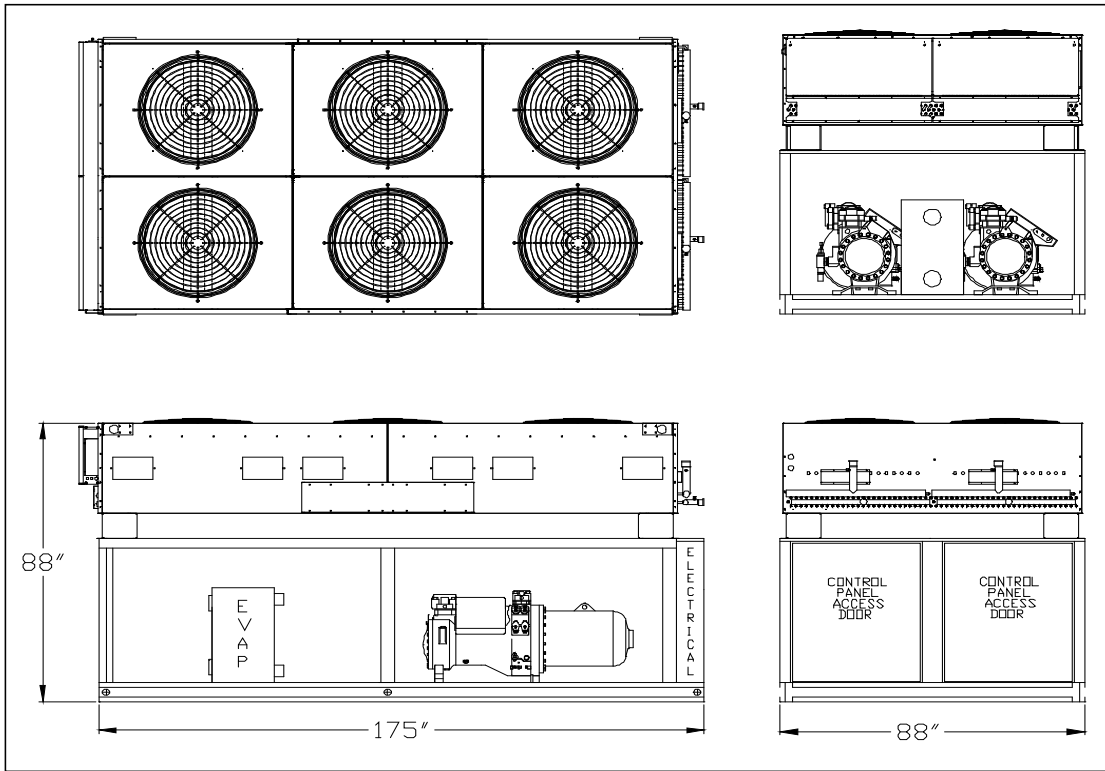

LENGTH	WIDTH	HEIGHT	WEIGHT	FLUID CONNECTIONS
175"	88"	88"	4500 lb	-

PRODUCT PERFORMANCE INFORMATION

REFRIGERANT	COMPRESSOR OPER. TEMP. SUCTION RANGE	°F	75 AMB		85 AMB		90 AMB		95 AMB		105 AMB	
			LFT	TONS	EER	TONS	EER	TONS	EER	TONS	EER	TONS
R404A	-10°F to 45°F	-30	14.9	3.8	13.3	3.2	12.4	2.9	11.4	2.6	9.2	2.0
		-20	20.1	4.7	18.2	3.9	17.2	3.6	16.1	3.2	13.6	2.5
		-10	26.0	5.7	23.9	4.7	22.8	4.3	21.5	3.9	18.8	3.1
		0	32.9	6.7	30.5	5.6	29.3	5.1	27.9	4.6	24.8	3.8
		10	40.7	7.9	38.1	6.6	36.7	6.0	35.1	5.5	31.8	4.5

DRAKE REFRIGERATION INC
 2900 SAMUEL DRIVE
 BENSLEM, PA 19020
 (888) 289-7299
www.drakechillers.com

*ALL INFORMATION **FOR REFERENCE ONLY**