

## LWL-1040

### 40W DELTA LED LINEAR LOW BAY

**BEAM ANGLE:** 120°

**INPUT VOLTAGE:** AC100-277V ~ 50/60Hz



**IK07**

**POWER SUPPLY:** Integral Driver

**POWER FACTOR:** >0.9

**LIFETIME:** ≥ 50,000hrs

**OPERATING TEMPERATURE:** -13°F ~ +113°F

**Housing:** The body of Delta Linear Low Bay is made of aluminum with an anti-corrosive coating to protect it in caustic environments, such as salt spray. The polycarbonate diffuser has a high-impact resistance, and the luminaire is sealed with resilient gasketing to prevent ingress.

**Mounting Options:** Available options include the center mount bracket.

**Electrical:** The Delta Linear Low Bay comes standard with a high-performance driver that goes from 100-277V, power factor of 90%+, internal to the fixture.

**Warranty:** Five (5) year warranty on entire system. For more details on warranty conditions, please contact factory.

**Lumen Maintenance:** The lumen packages are rated for 50,000+ hours ( $L_{70}$ ).

**Certifications:** UL certified to UL1598.




## ORDERING GUIDE

MODEL	WATTAGE	BEAM ANGLE	CRI	CCT	DIFFUSOR	FINISH	VOLTAGE
LWL-1	040	WW	8			W	U
	040 40W	WW 120 DEGREE	8 ≥80	30 3000K 40 4000K 60 6000K	MT MATTE CL CLEAR	W WHITE	U 100-277V

## DIMENSIONS


Lens & Side View

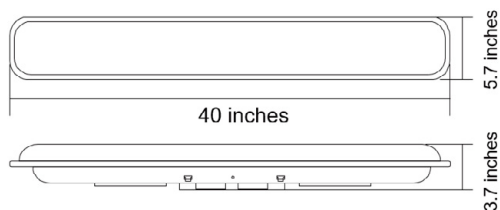

## ENERGY DATA

	POWER	LUMENS	EFFICACY
<b>MATTE DIFFUSOR</b>	40W	4,600 lm	115 lm/W
<b>CLEAR DIFFUSOR</b>	40W	5,400 lm	135 lm/W

## PHOTOMETRICS



LWL-1040		
H(m)	E(lx)	D(cm)
1	1090	310
2	273	620
3	121	940
4	68	1250
5	44	1560
6	30	1870
7	22	2190
8	17	2500
9	13	2810
10	11	3120