


# Multi-Max® FA-3: Insulation for Above the Deck

## Metal Panel Roofing Application

Multi-Max® FA-3 may be used as the roof insulation under metal panel roof systems. Secure the product to the deck with one (1) mechanical fastener per four (4) square feet of insulation prior to attachment of the metal panel system. Attachment of the securing brackets and/or devices must be with screws of sufficient length to penetrate the insulation and engage the roofing deck and/or roof structure below by a minimum of one inch. Bearing plates and other details of construction shall be applied per the metal roofing panel manufacturer.

**Refer to Multi-Max® FA-3 data sheet for additional application/installation, compliances, thermal and physical properties, limitations and warnings.**

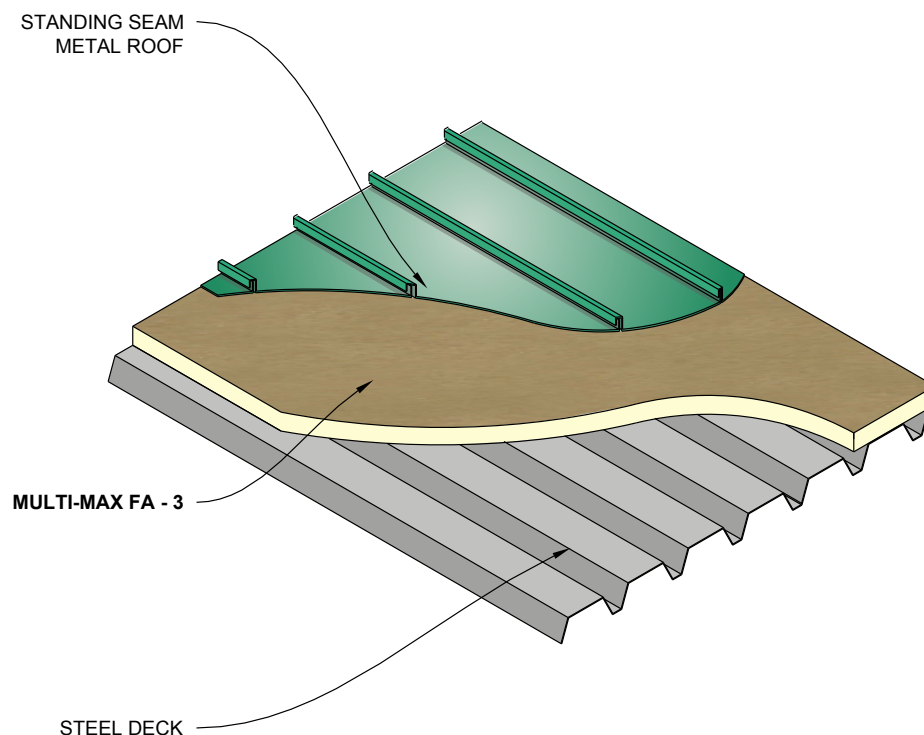

**Notes:**

1. Vapor retarders should be applied as required and recommended by the NRCA.

*Warranty: See Rmax "Sales Policy" and applicable warranties for terms and conditions. Rmax does not assume any responsibility or liability for the performance of any products other than those manufactured by Rmax. **NOTE: All Rmax products must be tarped, placed on skids and kept dry before and throughout construction. Requests for Certification Letters and/or special warranty considerations must be submitted to Rmax Sales prior to delivery of the products.***

2017-11