


24/7 PRIME POWER CO-GENERATOR

40 KW On-Site Production of Hot Water & Electricity



- Manufactured in U.S.A.
- Compact design
- Connection ready
- Indoor/Outdoor installation
- 5 Year Maintenance Coverage
- Runs 24/7 in parallel with the grid
- Operates with clean natural gas
- Meets SCAQMD standards
- Sound proof with 70 decibels
- Vibration free
- Weather resistant enclosure

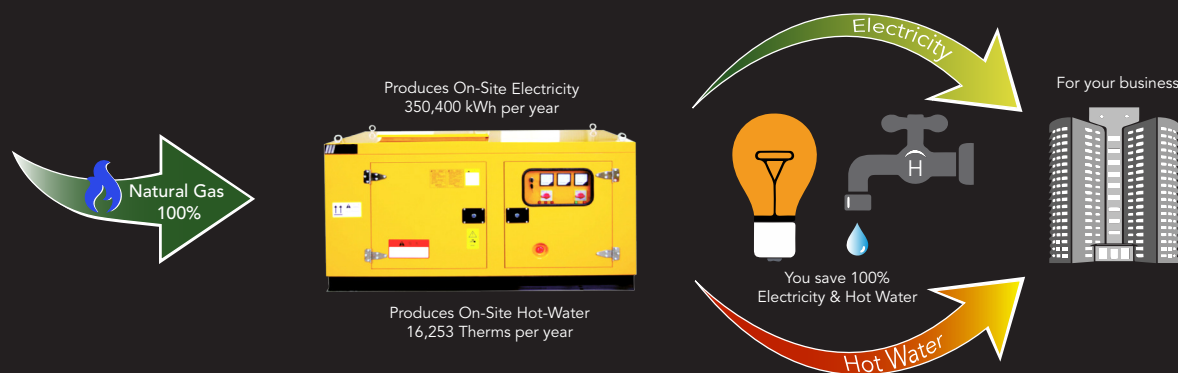

Our systems are designed for Hotels/Motels, Schools, Fitness Centers, Nursing Homes, Hospitals, Gas Stations, Restaurants, Food Processors, Plastic Molding, Bottling Plants, and Manufacturing Companies.

Operates 24 hours a day 7 days a week for prime power production of electricity and hot water.

40kw Co-Generator

Specifications Sheet



Power	Output	Units	Model 40
	Related Output	KW	K40
	Voltage	ACV	208@60Hz or 480@60Hz
	Phase/Wires		3 Phase, 3 Wire
	Power Factor	%	Greater than 95

Input (Parasitic loads)	Consumption	Units	Model 40
	Radiator Fan Stopped	kW	0.31
	Radiator Fan Operating	kW	0.64
	Heater for Cold Region	kW	0.82
	Voltage	ACV	208 or 480

Fuel	Consumption	Units	Model 40
Natural Gas	Low Heating Value	BTU/h	376,000
	High Htg Value	Therms/h	4.10

Heat Recovery	Consumption	Units	Model 40
Hot Water Temp.	Low Heating Value	BTU/h	195,614
	Inlet	Deg F	170- (MIN) 150
	Outlet	Deg F	185 - (MAX) 195
	Hot Water Flow Rate	Gal/Min	20

Sound Level	For Rated Load	Units	Model 40
	Radiator Fan Stopped	dB(A)	60 (Ind) 15 (Hotel)
	Radiator Fan Operating	dB(A)	65 (Ind) 20 (Hotel)

Dimensions	Overall Dimensions	Units	Model 40
	Length	Inches	93.50
	Width	Inches	45.00
	Height	Inches	54.00
	Net Weight	Pounds	1,980

Notes

1. GO-GEN MODEL 40 SYNCHRONOUS 208 VOLT 3 PHASES UL LISTED NO. MARATHON E 218433
2. EPA + SCAQMD EMISSION COMPLAINT UNDER 50 HP
3. RATED AT 49 HP