



Date: 25 January 2021

ASX: PRS

Shares on issue: 88,298,593

Market capitalisation: A\$17.7M  
(@ A\$0.20)

### Board of Directors

Non-Executive Chairman  
Thomas Mann

Managing Director  
Jason Beckton

Executive Director  
John Levings

Executive Director and CFO  
Peter Nightingale

### Company Secretary

Richard Edwards

### Substantial Shareholders

Robust Resources	18.6%
Peter Nightingale	8.7%
Thomas Mann	5.0%

[info@prospech.com.au](mailto:info@prospech.com.au)  
+61 2 9300 3333

Level 2, 66 Hunter Street  
Sydney, NSW, 2000

# QUARTERLY ACTIVITIES REPORT

For the quarter ended 31 December 2020

## Highlights

### DRILLING - MINE-SEQUENCE DRILLHOLE INTERSECTS HIGH GRADE GOLD AND SILVER

- High grade gold and silver intersection confirms LANF structural target.
- Drill hole BADD001 intersected **12.8 g/t Au and 380 g/t Ag** from 89.1m to 90.1m downhole.
- Individual assay grades up to **17.2 g/t Au and 494 g/t Ag**.
- Drill hole BADD006 intersected visible gold in quartz-stockwork. Screen fire assays underway to check for coarse gold.
- Sulphide mineral association potentially amenable to flotation processing.

The overall assessment from the drilling is that the LANF structure at Bauch is very strongly developed. Given the objective of locating high grade shoots within the plane of the LANF, a first-hole hit is a promising beginning. The top of a shoot has been intercepted and further drilling will define its dimensions.

There are 21 kilometres of surface trace of the LANF on Prospech's Hodrusa Hamre exploration licence, providing a 29 km<sup>2</sup> target area for exploration and discovery.

The association of gold and silver with base metal sulphides found in BADD001 is also a feature of the Rozalia Mine which produces a high grade gold gravity/flotation base metal concentrate.

### PRE-DRILLING - HIGH-GRADE GOLD AND SILVER DISCOVERIES NOVA BANA AND PUKANEC

#### Nova Bana

- Undrilled targets part of pipeline of future planning.
- Nova Bana exploration licence extension granted.
- Licence extension captures the Krakauer epithermal precious metal vein system.
- Krakauer samples assay up to **283 g/t Au and 1,700 g/t Ag**.

#### Pukanec

- High grade gold and silver assays up to **31.2 g/t Au and 1,703 g/t Ag**.
- Confirms prospectivity of un-drilled targets on Pukanec licence.
- 2 kilometre strike-length target hosts many instances of visible gold.



The Directors are pleased to present the December 2020 Quarterly Activities Report for Prospech Limited ('Prospech' or 'the Company') and its controlled entities ('the Group').

## Operations

### Hodrusa-Hamre Exploration Licence (100% Prospech)

#### Drilling program at Bauch


Hole BADD001 was designed to test the extension of a major detachment fault (locally known as a low angle normal fault or LANF) onto the Company's Hodrusa Hamre exploration licence. Mineralisation at the nearby operating Rozalia underground gold mine is controlled by the LANF, the surface trace of which falls mainly on the Company's Hodrusa Hamre exploration licence.

Hole BADD001 intersected high grade gold and silver mineralisation, precisely corresponding to the predicted position of the Bauch vein which was investigated in the past by historic tunnels and surface workings and interpreted to be an extension of the LANF.

The details of the intersection, which is also rich in base metal sulphides, are as follows:

- **BADD001: 12.8 g/t Au and 380 g/t Ag (2.3% Pb, 1.4% Zn) from 89.1m to 90.1m**

The Bauch vein strikes north-east and dips at 45 degrees to the south-east, in the direction of the Rozalia Mine (historic production ~1.2Mt @ 12 g/t Au, 14 g/t Ag).

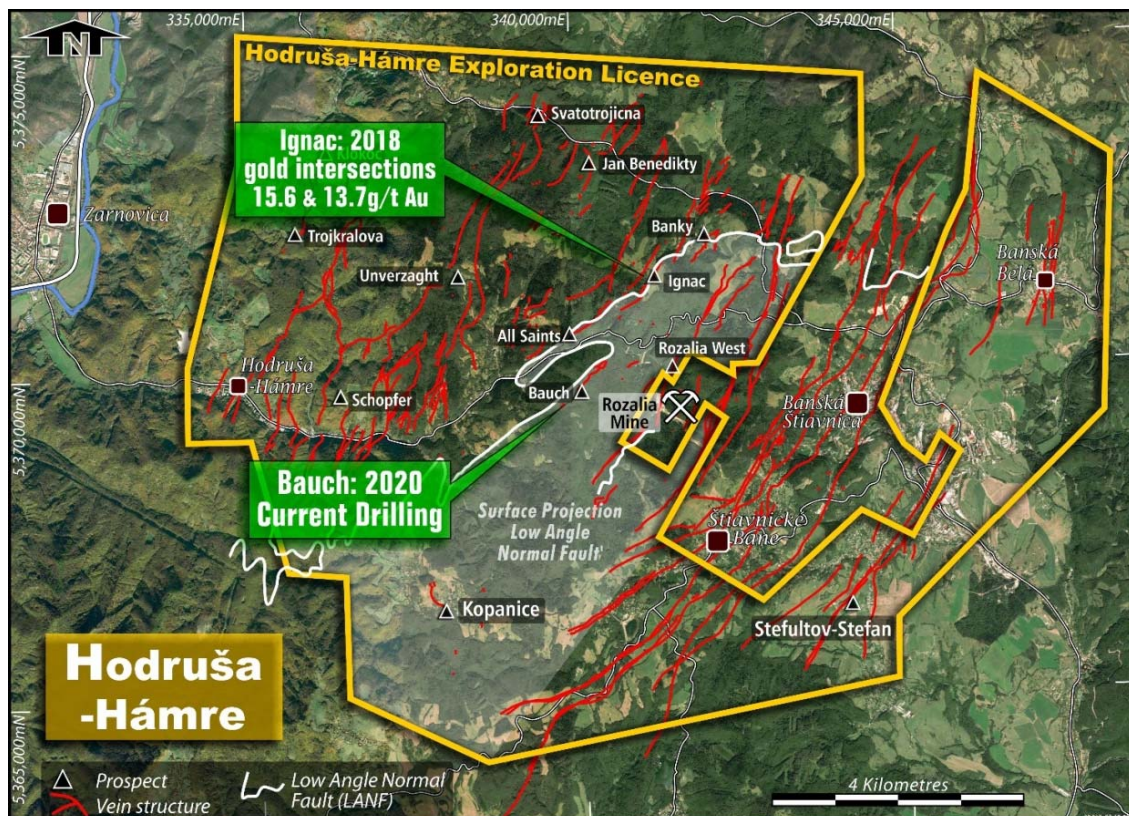

*Hodrusa Hamre Exploration Licence showing the LANF surface projection and prospects.*

In hole BADD006, visible free gold was noted in the core logging (see figure below). The gold occurred within a quartz stockwork in the hanging wall of the main Bauch vein position. In these cases of coarse-grained visible gold, a normal fire assay will not provide an accurate result because it only determines the gold content of a relatively small 30 gram charge. A screen fire assay accurately determines the gold content of a 1 kilogram sample mass. Screened fire assays are currently being carried out for the visible gold interval in hole BADD006 and other intervals within the mineralised quartz stockwork zone.



*Diamond drill core of BADD006 core showing the mineralised quartz-stockwork. The position of the visible gold is indicated by the pointer.*



*Close-up of the visible gold in diamond drill hole BADD006.*

## Nova Bana Exploration Licence (100% Prospect)

### Extension of Nova Bana licence over high-grade gold and silver discovery

In December 2020 the Company announced the grant by the Slovakian Ministry of Environment of an extension to the 100% owned Nova Bana exploration licence.


Located on the western flanks of the Stiavnica Strato Volcano within the Central Slovakian Volcanic Belt, the Nova Bana exploration licence extension captures the newly discovered, high-grade epithermal silver and gold mineralisation within the Krakauer vein system.

Subsequent to the granting of the exploration licence extension, rock chip grab samples were collected from historical spoil heaps and have returned precious metals assays as follows:

Sample ID	East m	North m	RL m	Au g/t	Ag g/t
PR1420	325,203	5,364,988	285.9	283.00	1,700.0
PR1422	325,198	5,364,988	288.4	1.07	80.8
PR1425	325,197	5,364,987	288.6	3.10	38.8
PR1426	325,197	5,364,987	288.6	8.03	25.7

*Krakauer rock chip sample results.*

Micro-XRF scanning of sample PR1420 show clearly that the high-grade gold and silver is concentrated within sulphidic zones and bands commonly known as 'ginguro' which are commonly associated with high grades of precious metals. Native gold and silver-sulphide minerals were observed in the hand specimens.

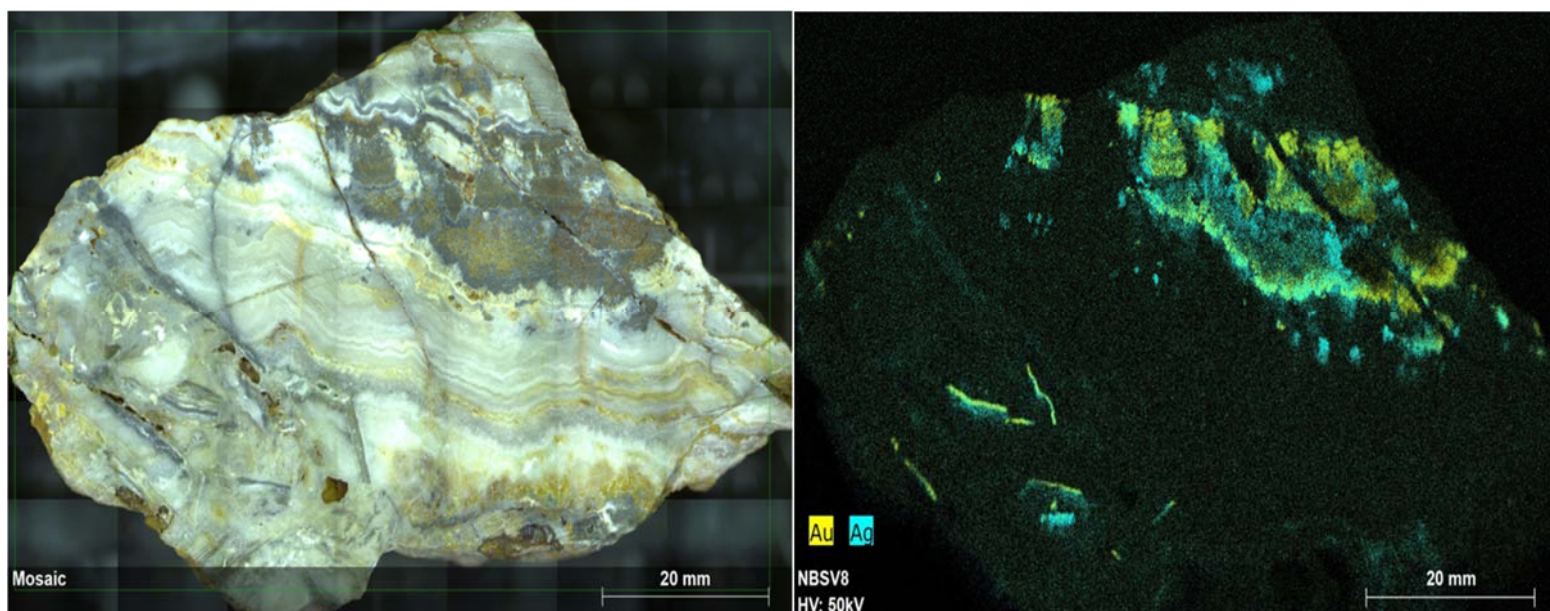

*Sample PR 1420 (283 g/t Au and 1,700 g/t Ag) under natural light.*

*Micro XRF image of sample PR 1420.*

Prospect proposes to carry out additional surface sampling and mapping of the Krakauer vein in preparation for diamond drilling early in the 2021 field season.

### **Rudno Exploration Licence (100% Prospech)**

A geological model was reviewed for Zubau high grade workings area previously drill tested by RUDD001 and RUDD002 in 2016. No field work was completed during the quarter.

### **Pukanec Exploration Licence (100% Prospech)**

- **High grade gold and silver assays up to 31.2 g/t Au and 1,703 g/t Ag.**
- **Confirms prospectivity of undrilled targets on Pukanec licence.**
- **2 kilometre strike-length target hosts many instances of visible gold.**

The western target zone at Pukanec exceeds 2 kilometres in strike length and has never before been drilled. The work carried out during the past 12 months, culminating in the most recent sample results announced here, has indicated that Pukanec prospect, and the western zone in particular, is a very attractive drilling target for high-grade gold and silver.

The western Pukanec target is promising and unusual for its high prevalence of visible gold and an association with calcite veining. Drill planning underway but an interim program to refine targets of hyperspectral data to be analysed for already collected 800 samples to be completed in February to further refine competitive drill targets.

### **Jasenie Exploration Licence (100% Prospech)**

Discussions on the status of underground workings to allow underground resource drilling have commenced with relevant government departments. Jasenie resource drilling may compete for drill planning in late 2021 as it is host to both gold and tungsten – an EU critical raw material ([Critical raw materials | Internal Market, Industry, Entrepreneurship and SMEs \(europa.eu\)](https://ec.europa.eu/euro-observatory/en/critical-materials-internal-market-industry-entrepreneurship-and-smes)).

### **Cejkov Exploration Licence (100% Prospech)**

Drilling planned on the high grade silver and base metal target at Cejkov has been delayed due to a non-Slovak drill contractor not being available due to Covid-19 travel restrictions. The services of a local drilling contractor have been secured and a three hole program will commence in February 2021 or as soon as weather permits.

### **March Quarter Planned Activity**

The 2021 field season is planned to commence as soon as weather and local conditions permit. Drill permits have already been received and a drilling contractor engaged for drill testing of the high grade silver-lead-zinc epithermal vein system on the Cejkov exploration in eastern Slovakia. It is planned to commence a three hole program in February 2021. The main drilling campaign on Hodrusa and Nova Bana-Pukanec exploration licences is anticipated to commence in March 2021.

## Corporate

### Initial Public Offering

During the December quarter the Company completed a \$5.0 million equity raising and was admitted to the Official List of the ASX on 4 December 2020, a significant milestone in the Company's history.

The equity raising saw the issue of 25,000,000 new fully paid ordinary shares at \$0.20 per share giving the Company an implied market capitalisation of \$17.7M at the offer price.

### Expenditures

Expenditure on mine exploration activities during the quarter totalled US\$226,000. There were no expenditures on mine production and development activities during the quarter.

### Related Party Expenditures

During the December quarter, the aggregate amount of payment to related parties and their associates totalled \$119,000, comprising \$99,000 of payments to Directors or Director related entities for Directors' consulting fees and \$20,000 in fees were paid to MIS Corporate Pty Limited ('MIS'), an entity in which Peter Nightingale has a controlling interest. MIS provides full administrative services, including administrative, accounting and investor relations staff, rental accommodation, services and supplies, to the Group.

For further information please contact:

Jason Beckton  
Managing Director  
[j.beckton@prospech.com](mailto:j.beckton@prospech.com)  
+61 (0)438 888 612

Peter Nightingale  
Director and Chief Financial Officer  
[pnightingale@prospech.com.au](mailto:pnightingale@prospech.com.au)  
+61 2 9300 3333

### Competent Person's Statement

The information in this Report that relates to Exploration Results is based on information compiled by Mr Jason Beckton, who is a Member of the Australian Institute of Geoscientists. Mr Beckton, who is Managing Director of the Company, has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Beckton consents to the inclusion in this Report of the matters based on the information in the form and context in which it appears.

pjn10625

**SECTION 1 SAMPLING TECHNIQUES AND DATA**

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>Rock chip grab samples were collected from outcrops, spoil heaps and accessible surface and underground workings of quartz veins, and zones of silicification, within Neogene volcanics under the supervision of a qualified geologist.</li> <li>Sample locations were surveyed with a handheld GPS and marked into sample books.</li> </ul>
Drilling techniques	<ul style="list-style-type: none"> <li>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul style="list-style-type: none"> <li>Diamond drilling HQ3 size triple tube.</li> </ul>
Drill sample recovery	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul style="list-style-type: none"> <li>Core is measure in the triple tube split before laying in the core boxes to ensure minimum disturbance and most accurate calculation of core recoveries.</li> <li>Overall core recoveries have been very high at 98%.</li> <li>Any relationship between core recovery and grade cannot be determined at this time, but due to the high core recovery, bias is considered very unlikely.</li> </ul>
Logging	<ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> </ul>	<ul style="list-style-type: none"> <li>The complete core is logged in detail by qualified geologists. Core is photographed wet and dry. All core is oriented. Detail structural measurements are collected. Core logging is a combination of qualitative and quantitative information.</li> </ul>
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> <li>If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<ul style="list-style-type: none"> <li>Approximately 1 to 2 Kg of material from each rock chip was sent to the laboratory for analysis.</li> <li>All sampling done under supervision of a qualified geologist.</li> <li>Core is manually split in to 2 equal halves using a diamond saw. The core is split along the core orientation reference line, where available.</li> <li>Half-core is considered to be a high-quality and very representative method of sample.</li> <li>Sample lengths are nominally 1 metre but vary to honour geological contacts.</li> </ul>
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations</li> </ul>	<ul style="list-style-type: none"> <li>Samples are stored in a secure location in Companies storage facilities and transported to the ALS laboratory in Romania for sample preparation of fine crush, riffle split and pulverizing of 1kg to 85% &lt; 75µm.</li> <li>Pulps are analyzed by ALS Romania using method code ME-ICP61, a 33 element determination using a four acid digestion and 30 gram charge fire assay with</li> </ul>

Criteria	JORC Code explanation	Commentary
	<p><i>factors applied and their derivation, etc.</i></p> <ul style="list-style-type: none"> <li>• <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i></li> </ul>	AA finish (Au-AA25) for gold. Ore grades are analysed by OG62 – 4 acid digestion method for each element when identified.
Verification of sampling and assaying	<ul style="list-style-type: none"> <li>• <i>The verification of significant intersections by either independent or alternative company personnel.</i></li> <li>• <i>The use of twinned holes.</i></li> <li>• <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></li> <li>• <i>Discuss any adjustment to assay data.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Laboratory provides assay certificates, which are stored electronically both in ALS and Company's servers.</li> <li>• Laboratory CSV files are merged with GPS Location data files using unique sample numbers as the key.</li> <li>• No adjustments made to assay data.</li> </ul>
Location of data points	<ul style="list-style-type: none"> <li>• <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></li> <li>• <i>Specification of the grid system used.</i></li> <li>• <i>Quality and adequacy of topographic control.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Rock chip samples are located using handheld GPS receivers with accuracy from 10-5m.</li> <li>• UTM projection WGS84 Zone 34N and local grid SJTSK03. Conversion between local and UTM grid is run through national certified webportal.</li> <li>• The topographic control, using handheld GPS, was adequate for the survey.</li> <li>• Drill collars are surveyed using a differential GPS or by triangulation depending of the tree cover and other environmental factors.</li> <li>• Downhole surveys are taken at nominal 50m intervals down the hole. Excessive deviation is not generally a problem in this field and this interval is considered sufficient. Downhole azimuth readings at magnetic and converted to Grid by adding 6.6 degrees.</li> </ul>
Data spacing and distribution	<ul style="list-style-type: none"> <li>• <i>Data spacing for reporting of Exploration Results.</i></li> <li>• <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></li> <li>• <i>Whether sample compositing has been applied.</i></li> </ul>	<ul style="list-style-type: none"> <li>• It is not yet determined whether the results from this drilling will be used in a mineral resource estimate.</li> </ul>
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> <li>• <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></li> <li>• <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></li> </ul>	<ul style="list-style-type: none"> <li>• No bias is believed to be introduced by the sampling method.</li> <li>• Drilling is designed to intersect the target structure as close to normal as is possible given the constraints of topography and access. In this program no holes were drilled at acute angles to the target structure.</li> </ul>
Sample security	<ul style="list-style-type: none"> <li>• <i>The measures taken to ensure sample security.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Samples were delivered to ALS Minerals laboratory in Romania by Prospecch trusted contractor and were not left unattended at any time. There were no incident reports from ALS lab on sample receiver cell.</li> </ul>
Audits or reviews	<ul style="list-style-type: none"> <li>• <i>The results of any audits or reviews of sampling techniques and data.</i></li> </ul>	<ul style="list-style-type: none"> <li>• No audits or reviews of the data management system have been carried out.</li> </ul>

## SECTION 2 REPORTING OF EXPLORATION RESULTS

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> <li>• <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></li> <li>• <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Prospecch Limited, through subsidiaries and contractual rights, holds 100% rights on the Hodrusa-Hamre - Banska Stiavnica, Nova Bana, Rudno, Pukanec and Jasenie tenements.</li> <li>• The laws of Slovakia relating to exploration and mining have various requirements. As the exploration advances specific filings and environmental or other studies may be required. There are ongoing requirements under Slovakian mining laws that will be required at each stage of advancement. Those filings and studies are maintained and updated as required by Prospecch's environmental and permit advisors specifically engaged for such purposes.</li> <li>• The Company is the manager of operations in accordance with generally accepted mining industry standards and practices.</li> </ul>
Exploration done	<ul style="list-style-type: none"> <li>• <i>Acknowledgment and appraisal of exploration by other parties.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Anciently, the target was silver, the currency of the day, and more recently, during the Communist era, the</li> </ul>



Criteria	JORC Code explanation	Commentary																																																						
<i>by other parties</i>		<p>targets were industrial base metals, copper, lead, zinc and others. As a result, much of the country, including the Company's exploration license areas, has not been subject to modern western exploration methodology or exploitation.</p> <ul style="list-style-type: none"> <li>Slovakia has a known mining history dating to Celtic times and earlier. Tools used by prehistoric miners at Spania Dolina, near Banska Bystrica are dated as early as 2000-1700 BC. Major production of metals (primarily copper and silver) occurred during the medieval period. The second oldest mining institute in the world is located at Banska Stiavnica and the local population is proud of their mining heritage, holding a three day mining festival every year. The mint at nearby Kremnica has operated for over six hundred years and continues to operate today.</li> <li>Communist era base metal and coal production was substantial and smelting of aluminium and nickel (material imported from Hungary and Albania) was carried out. Coal, gold, silver, talc, anhydrite and magnesite (and limestone, dolomite and gravel), bentonite, zeolite and industrial minerals are being mined in Slovakia today. An underground gold mine on a third party mining lease enclosed within the HHBS exploration license, the Rozalia Mine, continues in operation today, trucking a gravity/flotation concentrate to a smelter in Belgium.</li> <li>Communist era gold assays used in Government and private exploration programs have been proven to be unreliable and this must be taken into account when interpreting reports from the Communist era.</li> <li>Prospect holds 100% of two exploration licences covering approximately 115 square kilometres in the Hodrusa-Hamre/Banska Stiavnica mining district and the nearby Nova Bana goldfield where more than 1,000 years of historical production is estimated to have totalled 2.4 million ounces of gold, 120 million ounces of silver, 70,000 tonnes of zinc, 55,000 tonnes of lead and 8,000 tonnes of copper.</li> <li>The Hodrusa-Hamre/Banska Stiavnica mining district and the Nova Bana goldfield are located approximately 180 kilometres east of Bratislava in Slovakia, a country member of the European Union and Eurozone.</li> </ul>																																																						
Geology	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>Located on the western flanks of the Stiavnica Strato Volcano within the Central Slovakian Volcanic Belt, the Nova Bana Exploration Licence covers quartz veins with classically banded, low-sulphidation epithermal textures with sulphidic "ginguro" zones, which are commonly associated with high grades of precious metals. Native gold and silver-sulphide minerals were observed in the hand specimens.</li> </ul>																																																						
Drill hole Information	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul>	<ul style="list-style-type: none"> <li> <table border="1" data-bbox="885 1444 1428 1646"> <thead> <tr> <th>Hole_ID</th> <th>UTM_Grid_ID</th> <th>UTM_East</th> <th>UTM_North</th> <th>RL</th> <th>Max_Depth</th> </tr> </thead> <tbody> <tr> <td>BADD001</td> <td>WGS 84 Zone 34N</td> <td>340,210.03</td> <td>5,369,923.62</td> <td>625.70</td> <td>143.7</td> </tr> <tr> <td>BADD002</td> <td>WGS 84 Zone 34N</td> <td>340,210.99</td> <td>5,369,923.16</td> <td>625.74</td> <td>191.1</td> </tr> <tr> <td>BADD003</td> <td>WGS 84 Zone 34N</td> <td>340,210.68</td> <td>5,369,924.12</td> <td>625.72</td> <td>137.6</td> </tr> <tr> <td>BADD004</td> <td>WGS 84 Zone 34N</td> <td>340,294.43</td> <td>5,369,975.63</td> <td>607.50</td> <td>78.9</td> </tr> <tr> <td>BADD005</td> <td>WGS 84 Zone 34N</td> <td>340,294.99</td> <td>5,369,975.16</td> <td>607.57</td> <td>179.8</td> </tr> <tr> <td>BADD006</td> <td>WGS 84 Zone 34N</td> <td>340,293.78</td> <td>5,369,976.17</td> <td>607.41</td> <td>182.7</td> </tr> <tr> <td>BADD007</td> <td>WGS 84 Zone 34N</td> <td>340,324.14</td> <td>5,370,028.58</td> <td>597.57</td> <td>200.4</td> </tr> <tr> <td>BADD008</td> <td>WGS 84 Zone 34N</td> <td>340,221.23</td> <td>5,369,767.53</td> <td>625.86</td> <td>239.5</td> </tr> </tbody> </table> </li> </ul>	Hole_ID	UTM_Grid_ID	UTM_East	UTM_North	RL	Max_Depth	BADD001	WGS 84 Zone 34N	340,210.03	5,369,923.62	625.70	143.7	BADD002	WGS 84 Zone 34N	340,210.99	5,369,923.16	625.74	191.1	BADD003	WGS 84 Zone 34N	340,210.68	5,369,924.12	625.72	137.6	BADD004	WGS 84 Zone 34N	340,294.43	5,369,975.63	607.50	78.9	BADD005	WGS 84 Zone 34N	340,294.99	5,369,975.16	607.57	179.8	BADD006	WGS 84 Zone 34N	340,293.78	5,369,976.17	607.41	182.7	BADD007	WGS 84 Zone 34N	340,324.14	5,370,028.58	597.57	200.4	BADD008	WGS 84 Zone 34N	340,221.23	5,369,767.53	625.86	239.5
Hole_ID	UTM_Grid_ID	UTM_East	UTM_North	RL	Max_Depth																																																			
BADD001	WGS 84 Zone 34N	340,210.03	5,369,923.62	625.70	143.7																																																			
BADD002	WGS 84 Zone 34N	340,210.99	5,369,923.16	625.74	191.1																																																			
BADD003	WGS 84 Zone 34N	340,210.68	5,369,924.12	625.72	137.6																																																			
BADD004	WGS 84 Zone 34N	340,294.43	5,369,975.63	607.50	78.9																																																			
BADD005	WGS 84 Zone 34N	340,294.99	5,369,975.16	607.57	179.8																																																			
BADD006	WGS 84 Zone 34N	340,293.78	5,369,976.17	607.41	182.7																																																			
BADD007	WGS 84 Zone 34N	340,324.14	5,370,028.58	597.57	200.4																																																			
BADD008	WGS 84 Zone 34N	340,221.23	5,369,767.53	625.86	239.5																																																			

## Criteria

## JORC Code explanation

## Commentary

Hole_ID	Depth	Dip	MAG_Azimuth	UTM_Azimuth	Tool
BADD001	0.00	-60.00	283.00	289.60	Compass
BADD001	15.00	-59.49	284.95	291.55	Nomad
BADD001	50.00	-60.26	282.94	289.54	Nomad
BADD001	100.00	-60.39	281.91	288.51	Nomad
BADD001	142.00	-60.92	280.14	286.74	Nomad
BADD002	0.00	-85.95	286.30	292.90	Nomad
BADD002	15.00	-85.95	286.30	292.90	Nomad
BADD002	22.00	-85.60	292.67	299.27	Nomad
BADD002	34.00	-86.01	293.61	300.21	Nomad
BADD002	46.00	-86.02	293.15	299.75	Nomad
BADD002	50.00	-85.95	294.20	300.80	Nomad
BADD002	53.00	-86.01	293.80	300.40	Nomad
BADD002	58.00	-85.60	290.39	296.99	Nomad
BADD002	70.00	-85.37	291.68	298.28	Nomad
BADD002	82.00	-85.38	290.97	297.57	Nomad
BADD002	94.00	-85.37	299.08	305.68	Nomad
BADD002	100.00	-85.43	295.18	301.78	Nomad
BADD002	106.00	-85.51	297.57	304.17	Nomad
BADD002	118.00	-85.32	300.55	307.15	Nomad
BADD002	130.00	-85.05	300.67	307.27	Nomad
BADD002	142.00	-85.12	296.42	303.02	Nomad
BADD002	150.00	-85.35	301.43	308.03	Nomad
BADD002	154.00	-85.43	297.11	303.71	Nomad
BADD002	166.00	-85.45	303.63	310.23	Nomad
BADD002	178.00	-85.19	298.82	305.42	Nomad
BADD002	190.00	-85.36	301.21	307.81	Nomad
BADD003	0.00	-60.00	311.00	317.60	Compass
BADD003	12.00	-60.21	311.72	318.32	Nomad
BADD003	18.00	-60.21	311.70	318.30	Nomad
BADD003	29.00	-60.50	311.16	317.76	Nomad
BADD003	41.00	-60.04	311.28	317.88	Nomad
BADD003	50.00	-59.70	311.90	318.50	Nomad
BADD003	53.00	-60.04	312.28	318.88	Nomad
BADD003	65.00	-59.72	311.52	318.12	Nomad
BADD003	77.00	-59.17	311.85	318.45	Nomad
BADD003	89.00	-58.98	311.60	318.20	Nomad
BADD003	100.00	-58.38	312.26	318.86	Nomad
BADD003	101.00	-58.63	311.59	318.19	Nomad
BADD003	113.00	-58.21	312.26	318.86	Nomad
BADD003	125.00	-57.99	312.31	318.91	Nomad
BADD003	137.00	-57.69	312.31	318.91	Nomad

Hole_ID	Depth	Dip	MAG_Azimuth	UTM_Azimuth	Tool
BADD004	0.00	-60.00	312.88	319.48	Nomad
BADD004	30.00	-61.06	312.88	319.48	Nomad
BADD004	50.00	-60.61	314.40	321.00	Nomad
BADD005	0.00	-86.00	320.00	326.60	
BADD005	15.00	-86.10	320.89	327.49	Nomad
BADD005	35.00	-85.84	320.75	327.35	Nomad
BADD005	47.00	-85.43	321.22	327.82	Nomad
BADD005	50.00	-85.60	323.26	329.86	Nomad
BADD005	59.00	-85.58	322.70	329.30	Nomad
BADD005	71.00	-85.49	321.73	328.33	Nomad
BADD005	83.00	-85.58	318.95	325.55	Nomad
BADD005	95.00	-85.70	324.03	330.63	Nomad
BADD005	100.00	-85.88	323.68	330.28	Nomad
BADD005	107.00	-85.37	323.93	330.53	Nomad
BADD005	119.00	-85.74	320.90	327.50	Nomad
BADD005	131.00	-85.36	323.77	330.37	Nomad
BADD005	143.00	-85.34	323.70	330.30	Nomad
BADD005	150.00	-85.67	326.10	332.70	Nomad
BADD005	155.00	-85.33	324.78	331.38	Nomad
BADD005	167.00	-85.43	326.90	333.50	Nomad
BADD005	179.00	-85.25	324.54	331.14	Nomad
BADD006	0.00	-61.31	310.67	317.27	Nomad
BADD006	15.00	-61.31	310.67	317.27	Nomad
BADD006	50.00	-61.73	310.77	317.37	Nomad
BADD006	100.00	-62.60	309.82	316.42	Nomad
BADD006	150.00	-62.85	309.81	316.41	Nomad
BADD006	180.00	-63.18	309.12	315.72	Nomad
BADD007	0.00	-61.02	317.26	323.86	
BADD007	23.00	-61.02	317.26	323.86	Nomad
BADD007	50.00	-61.71	313.95	320.55	Nomad
BADD007	100.00	-61.59	313.74	320.34	Nomad
BADD007	150.00	-62.23	313.89	320.49	Nomad
BADD007	200.00	-61.69	314.84	321.44	Nomad
BADD008	0.00	-60.77	307.65	314.25	
BADD008	18.00	-60.77	307.65	314.25	Nomad
BADD008	50.00	-60.18	307.76	314.36	Devishot
BADD008	100.00	-60.24	308.80	315.40	Devishot
BADD008	150.00	-59.47	310.80	317.40	Devishot
BADD008	200.00	-59.18	311.48	318.08	Devishot

Criteria	JORC Code explanation	Commentary																														
Data aggregation methods	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	<ul style="list-style-type: none"> <li>No weighted averages reported as equal length intervals of 0.5m sampled and results have been reported with aggregated intercepts.</li> </ul>																														
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</li> </ul>	<ul style="list-style-type: none"> <li>BADD001 intersected 1m at 12.8 g/t Au and 380 g/t Ag from 89.1m downhole with true width &gt;98% of the drilled width. Drilling designed to intercept target at orthogonal angle to report nominal true width. Individual assay results for the reported intercepts area as follows:</li> </ul> <table border="1"> <thead> <tr> <th>Hole ID</th> <th>Sample ID</th> <th>From m</th> <th>To m</th> <th>Interval m</th> <th>Au g/t</th> <th>Ag g/t</th> <th>Cu %</th> <th>Pb %</th> <th>Zn %</th> </tr> </thead> <tbody> <tr> <td>BADD001</td> <td>M662913</td> <td>89.1</td> <td>89.6</td> <td>0.5</td> <td>17.2</td> <td>494</td> <td>0.14</td> <td>2.17</td> <td>1.15</td> </tr> <tr> <td>BADD001</td> <td>M662914</td> <td>89.6</td> <td>90.1</td> <td>0.5</td> <td>8.47</td> <td>266</td> <td>0.15</td> <td>2.42</td> <td>1.66</td> </tr> </tbody> </table>	Hole ID	Sample ID	From m	To m	Interval m	Au g/t	Ag g/t	Cu %	Pb %	Zn %	BADD001	M662913	89.1	89.6	0.5	17.2	494	0.14	2.17	1.15	BADD001	M662914	89.6	90.1	0.5	8.47	266	0.15	2.42	1.66
Hole ID	Sample ID	From m	To m	Interval m	Au g/t	Ag g/t	Cu %	Pb %	Zn %																							
BADD001	M662913	89.1	89.6	0.5	17.2	494	0.14	2.17	1.15																							
BADD001	M662914	89.6	90.1	0.5	8.47	266	0.15	2.42	1.66																							
Diagrams	<ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>	<ul style="list-style-type: none"> <li>The location and results received for both rock chip and drill-core samples are displayed in the attached maps and/or tables. Coordinates are UTM Zone 34N.</li> </ul>																														
Balanced reporting	<ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>	<ul style="list-style-type: none"> <li>Results for all mineralised samples collected in this program are displayed on the attached maps and/or tables.</li> </ul>																														
Other substantive exploration data	<ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>	<ul style="list-style-type: none"> <li>No metallurgical or bulk density tests were conducted at the project by Prospech.</li> </ul>																														
Further work	<ul style="list-style-type: none"> <li>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	<ul style="list-style-type: none"> <li>Prospech is in the processing of submitting samples of the remaining drill core for analysis. Depending of the results, further drilling may be carried out at Bauch</li> </ul>																														